

APRIL 1957

~~SECRET~~

DECLASSIFIED
PROGRAM PLANNING REPORT
PROJECT 1794
EXTENSION PROGRAM

Prepared in accordance with initial Statement
of Work dated 18 December 1956 - Revised
11 February 1957.

Exhibit 1 Identified 57MCP5901

Supplementary Agreement to Contract No.

DECLASSIFIED 33 (600) 305

~~SECRET~~

Declassified on June 14, 2001 by the
Air Force Declassification Office
IAW EO 12958



AVRO AIRCRAFT LIMITED

SECURITY WARNING

This document is intended solely for the recipient and such persons as have been delegated to use it in the course of their duty and may be used in connection with work performed for or on behalf of the United States Air Force.

The transmission, unauthorized retention, destruction, or the revelation of its contents, in any manner, to any unauthorized person(s) is forbidden.

Failure to comply with any of the above instructions is an infraction of the Canadian Official Secrets Act and is a violation within the meaning of the United States Espionage Laws, title 18, U. S. C., sections 793 and 794.

This copy has been issued by Avro Aircraft Limited, Malton.

To -

Date -

Copy No. - **1**

~~SECRET~~

DECLASSIFIED

PROGRAM PLANNING REPORT

PROJECT 1794

EXTENSION PROGRAM

Prepared in accordance with initial Statement of Work
dated 18 December 1956 - Revised 11 February 1957, Exhibit 1

identified 57MCP5901

Supplementary Agreement #3


to

Contract No. AF33(600)30161


Issued by:

Avro Aircraft Limited
Malton, Ontario, Canada

Approved by



J.C.M. Frost
Chief Design Engineer
Special Projects Group
Avro Aircraft Limited



H.C. Moody
Engineering Manager
Special Projects Group
Avro Aircraft Limited

DECLASSIFIED

The number of pages in this report including Security Warning, Title,
Frontispiece, Table of Contents, Illustration sheets and Exhibits is 121.


~~SECRET~~

AVRO AIRCRAFT LIMITED

DECLASSIFIED



PROJECT 1794

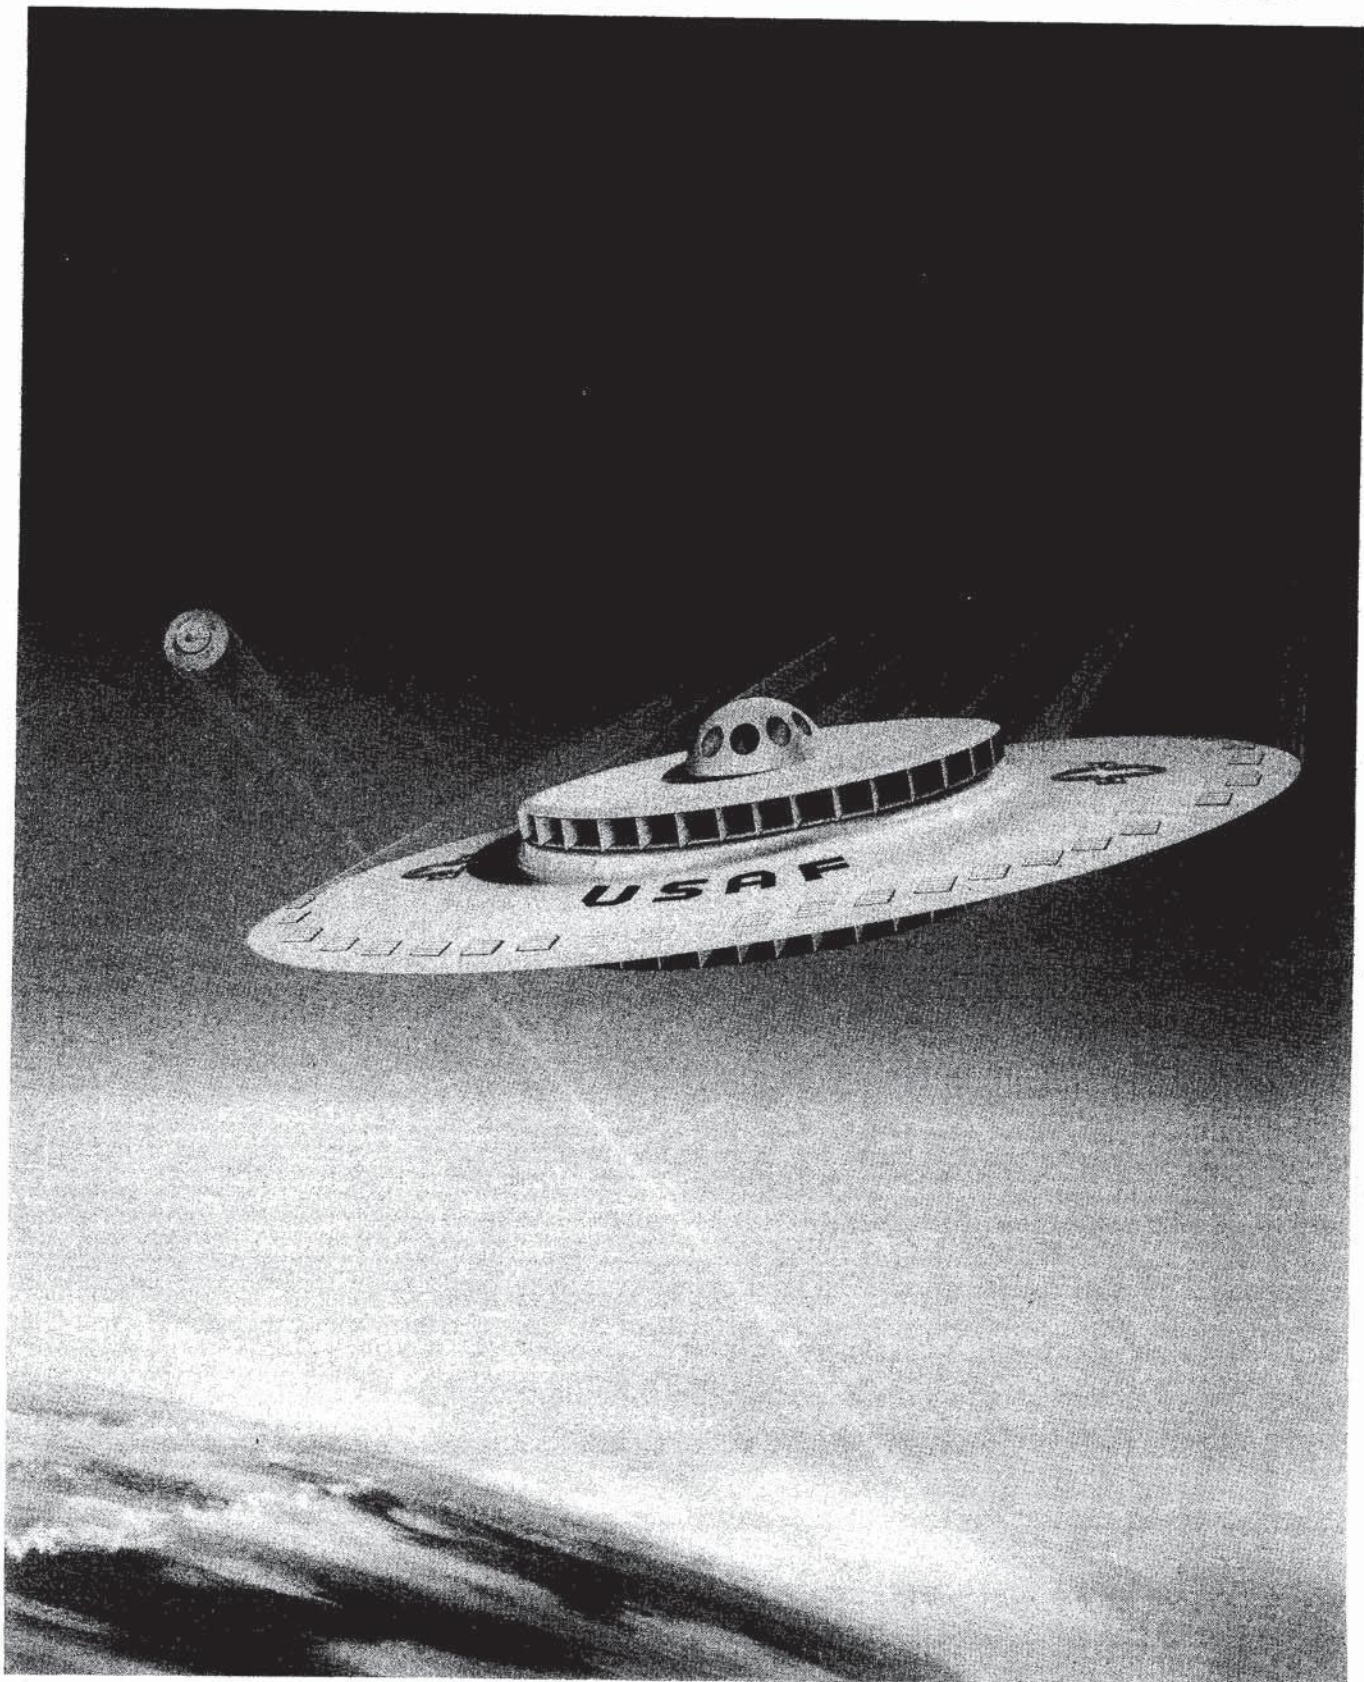

1808-704-1

USAF PROJECT 1794

DECLASSIFIED

~~SECRET~~

~~SECRET~~

DECLASSIFIED

TABLE OF CONTENTS

SECTION	TITLE	PAGE
1	SUMMARY	1
2	INTRODUCTION	2
3	DESIGN AND PERFORMANCE	12
4	AERODYNAMICS	19
5	PROPULSION	48
6	STABILITY AND CONTROL	72
7	STRUCTURES	84
8	REPORTS AND CONSOLIDATED WORK AND COST CHARTS	92
9	COMPANY STATEMENTS Exhibit 1 Exhibit 2	108

DECLASSIFIED

~~SECRET~~

~~SECRET~~

DECLASSIFIED

LIST OF ILLUSTRATIONS

FIGURE	TITLE	PAGE
1	Plan View and Section Through Aircraft ✓	3
2	Cutaway of Aircraft Structure ✓	4
3	Turbine - Compressor Assembly ✓	5
4	A. S. Viper Engine Installation ✓	6
5	Flame Tube and Final Nozzle Assembly	8
6	Flow Distribution - Hovering and Ground Cushion	9
7	Work Chart - Design and Performance	17
8	Work Schedule Chart - Design and Performance	18
11	Proposed 1/12 Scale Transition Model	20
12	1/6 Scale Model in Tunnel	22
13	1/6 Scale Model	23
14	Proposed 1/12 Scale Transonic Reflection Plane Model	25
15	2/25 Scale Air Intake Model	27
16	2/25 Scale Air Intake Model	28
17	Proposed Changes to 2/25 Scale Model	29
18	1/40 Scale Sting Mounted Model	30
19	1/40 Scale Sting Mounted Model	31
20	1/40 Scale Sting Mounted Model	32
21	1/23 Scale Supersonic Model	34
22	1/23 Scale Supersonic Model	35
23	Proposed Changes to 1/23 Scale Model	36
24	1/3 Scale Nozzle Rig	38
25	1/3 Scale Outer Wing Segment Test Rig	39

~~SECRET~~

DECLASSIFIED

~~SECRET~~

DECLASSIFIED

LIST OF ILLUSTRATIONS (Cont'd)

FIGURE	TITLE	PAGE
26	1/5 Scale Air Intake Model	42
27	Intake Arrangement	43
28	Ground Effects Rig	44
29	Ground Effects Rig	45
30	Work Chart - Aerodynamics	46
31	Work Schedule Chart - Aerodynamics	47
34	Schematic of Propulsion Control System	50
35	Viper Air Intake	52
36	Exhaust Fantail Test	53
37	Viper Air Intake and Exhaust Fantail	54
38	Overspeed Rig ✓	55
39	Balance and Overspeed Rig ✓	56
40	Test House and Six Viper Test Rig ✓ <i>new built</i>	57
41	Combustion Entry Mach No.	60
42	Combustion Entry Pressure and Temperature	61
43	Estimated Combustion Efficiency and Extinction Limits	62
44	Six Viper Test Rig with Outer Wing and Cockpit <i>new step</i> ✓	67
45	Work Chart - Propulsion	70
46	Work Schedule Chart - Propulsion	71
49	Schematic of Shutter Control System	73
50	Frequency Response Rig No. 1	77
51	Frequency Response Rig No. 1	78
52	Schematic of Control System Mechanical Analogue	80

~~SECRET~~

DECLASSIFIED

~~SECRET~~

DECLASSIFIED

LIST OF ILLUSTRATIONS (Cont'd)

FIGURE	TITLE	PAGE
53	Work Chart - Stability and Control	82
54	Work Schedule Chart - Stability and Control	83
57	Proposed Stressing Reports for P. V. 704	85
58	Proposed Stressing Reports for Design Studies	87
59	Work Chart - Structures	90
60	Work Schedule Chart - Structures	91
65	Consolidated Work Chart	94
	Manhour and Cost Estimates	95-108

DECLASSIFIED

~~SECRET~~

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

1. SUMMARY

This document details a planned program for the further development of the Avro Aircraft Limited VTOL aircraft concept, designated Project 1794, with accompanying cost estimates and scheduling.

The program is prepared in accordance with initial Statement of Work dated 18 December 1956, as revised 11 February 1957, Exhibit 1, identified 57MCP5901. The work proposed parallels the private venture construction of a flying prototype presently being undertaken by Avro Aircraft Limited, and data obtained from the latter program, as and to the extent called for in the above exhibit, will be reported as part of the USAF program. A consolidated work chart, in Section 8 of this report, illustrates the tie-in between the company program, designated P. V. 704 and that of the USAF.

In order that the significance and context of this program may be appreciated, a brief description of P. V. 704 is given in the Introduction. Following this, the USAF program is presented under six headings and wherein the P. V. 704 planning is concurrently described. Work charts, costs, manhour requirements and scheduling down to and including three digit sub parts of the Statement of Work are also included.

Funding required against the USAF program amounts to the sum of \$1,483,847 in Canadian Funds. This sum includes \$180,000 for the supply of six ASV Viper 8 engines, and \$430,960 for the Design and Development of the Combustion and Fuel Systems as per Statement of Work sub part 1.1.7. Wind Tunnel costs are not included.

The contract period will be twenty months, starting 1 February 1957, ending 31 October 1958.

DECLASSIFIED

SECRET

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

2. INTRODUCTION

The Avro VTOL aircraft is essentially a proposal for a high performance supersonic aeroplane in which the entire interior of the wing is utilized for the propulsion system, air and gas flow, having also - due to the characteristics of the propulsion system and the wing planform - a VTOL-STOL capability.

The concept was developed by Avro to its present form and was reviewed as to feasibility under a study contract with USAF AF. 33(600)30161 (supplemental agreement No 1), which was completed in July 1956.

This development program, involves further tests to investigate the potentialities of this type of aeroplane, with study of application to a weapon system, and supplements the Avro Aircraft Limited company program (P. V. 704) which covers the building of one flying prototype.

In order that the significance and context may be appreciated the general layout of P. V. 704 is given in Figs. 1 through 6 and described as follows:

Fig. 1 is a plan and section drawing of the aircraft. It is 35.3 ft. in diameter; stands about 2 ft. off the ground, measures 7.7 ft. from the lower surface to the top of the canopy; is approximately symmetrical in section and is expected to weigh about 20,000 lb. with 5,700 lb. fuel.

Six Armstrong Siddeley Viper turbo-jets - 1,900 lb. thrust, 22 inch overall diameter, 570 lb. weight each - are mounted radially in the wing, exhausting inward; and used as gas generators to drive a pair of contra-rotating compressors by means of a radial in-flow turbine. (See the section cut-away Fig. 2).

The 8 ft. diameter compressors (Fig. 3), which rotate slowly by comparison with conventional turbo-jets, draw air from the upper and lower intakes (Fig. 2) and force it radially out through the wing between the Viper engines. Some of the air thrown out by the compressors is directed back to feed the Viper engines (Fig. 4).

The air is diffused in the wing to a high pressure at the flame holders (Fig. 1), where fuel may be added to augment the thrust, and is then exhausted through pneumatically

DECLASSIFIED

SECRET



PROJECT 1700

DECLASSIFIED

AVRO AIRCRAFT LIMITED

2256-700-3A

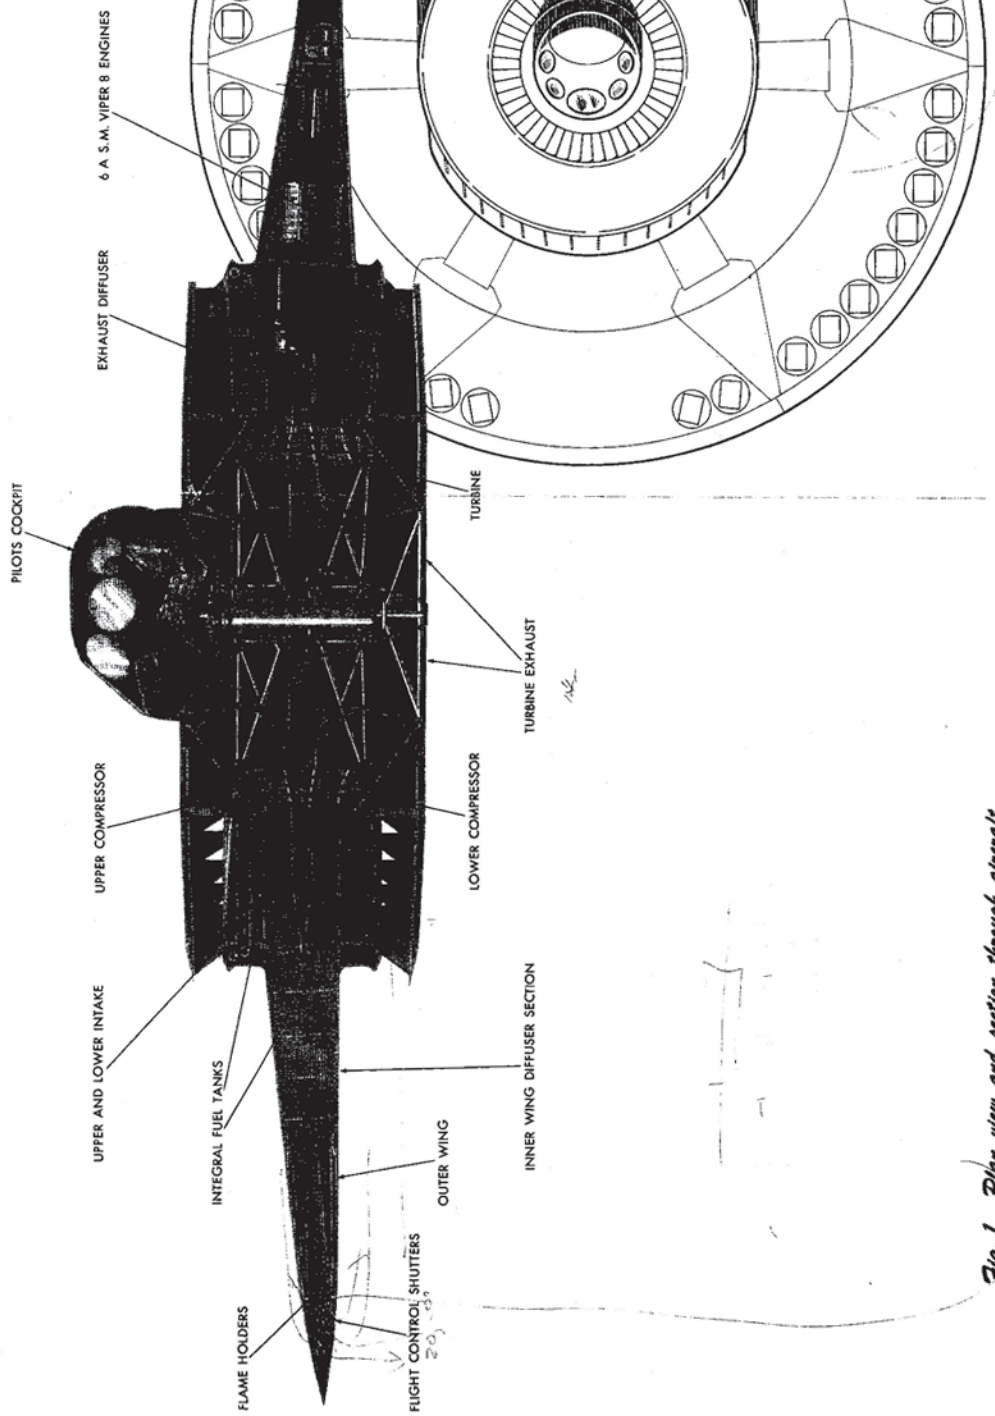


Fig. 1 Plan view and section through aircraft

1-9661-272

DECLASSIFIED



DECLASSIFIED

AVRO AIRCRAFT LIMITED

PROJECT 1794

235-1794-2


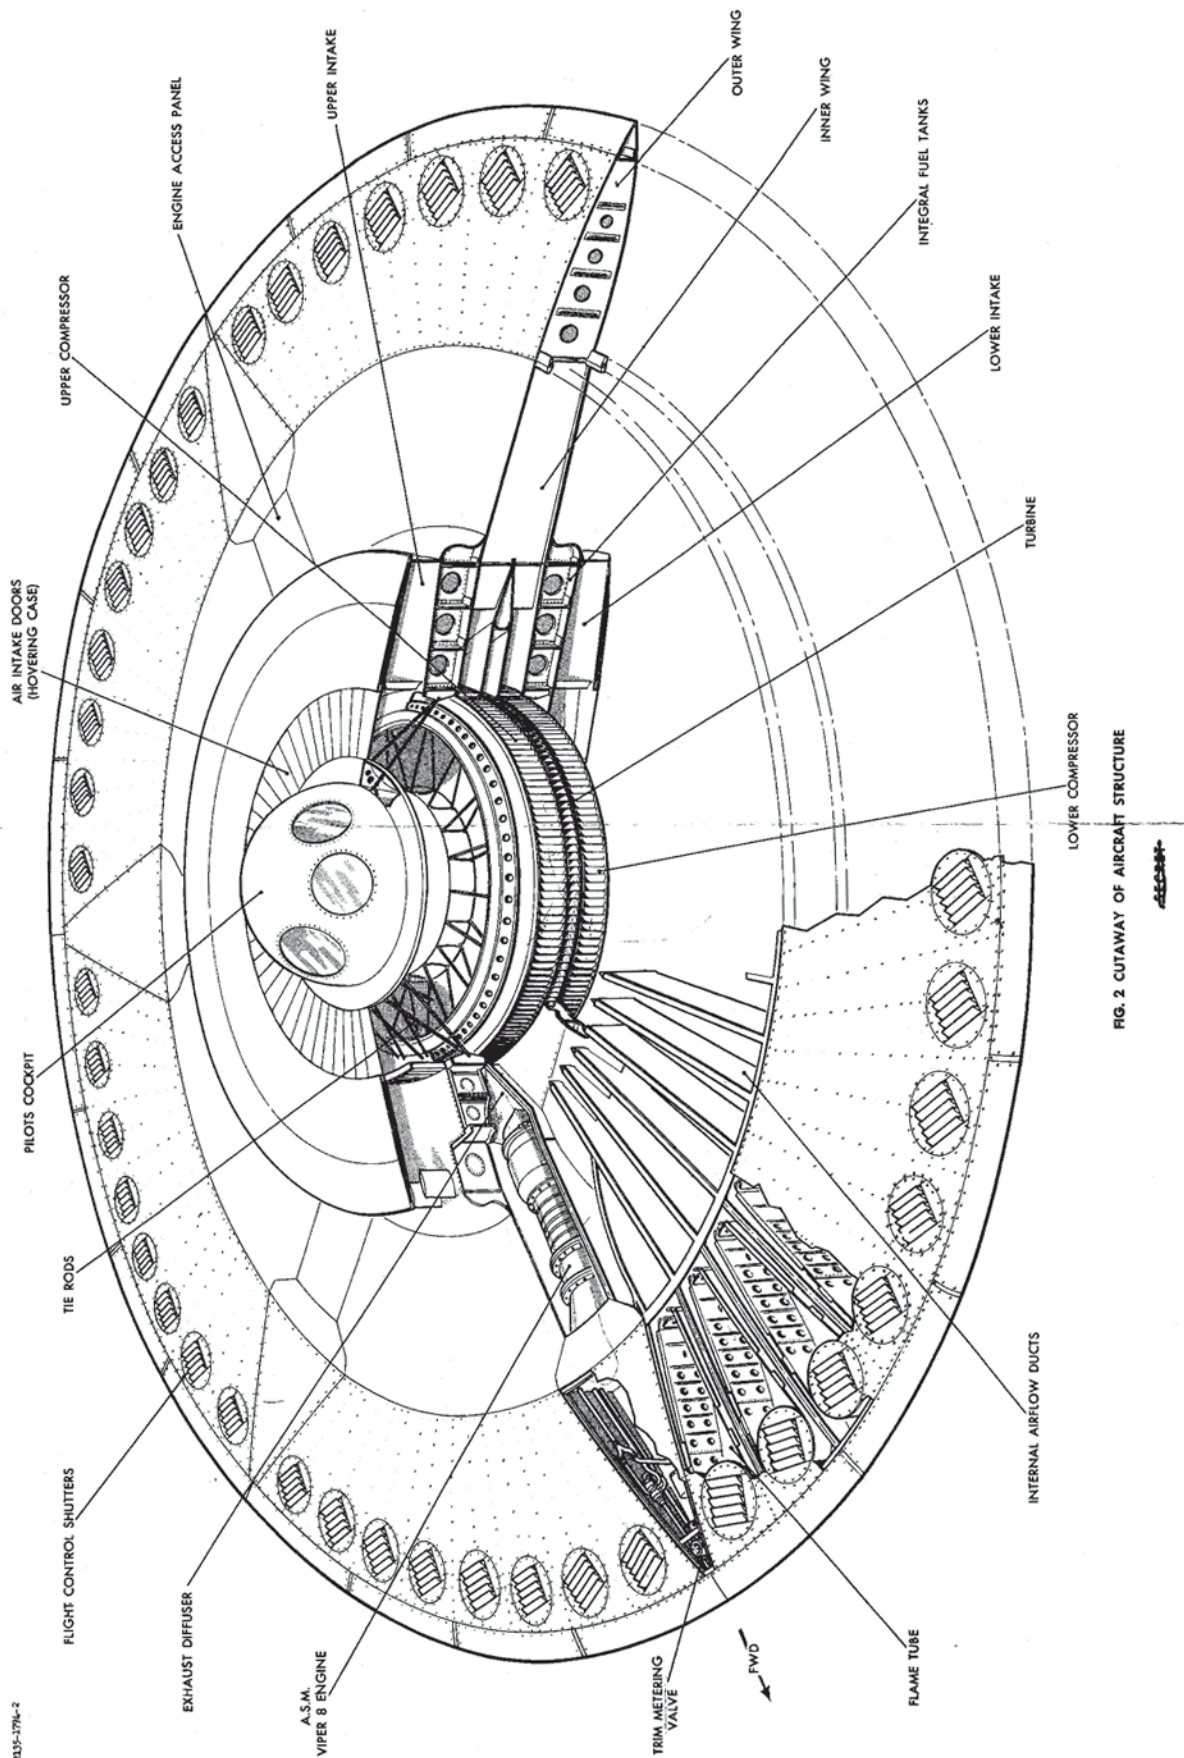



FIG. 2 CUTAWAY OF AIRCRAFT STRUCTURE

SECRET

DECLASSIFIED

727-1794-1

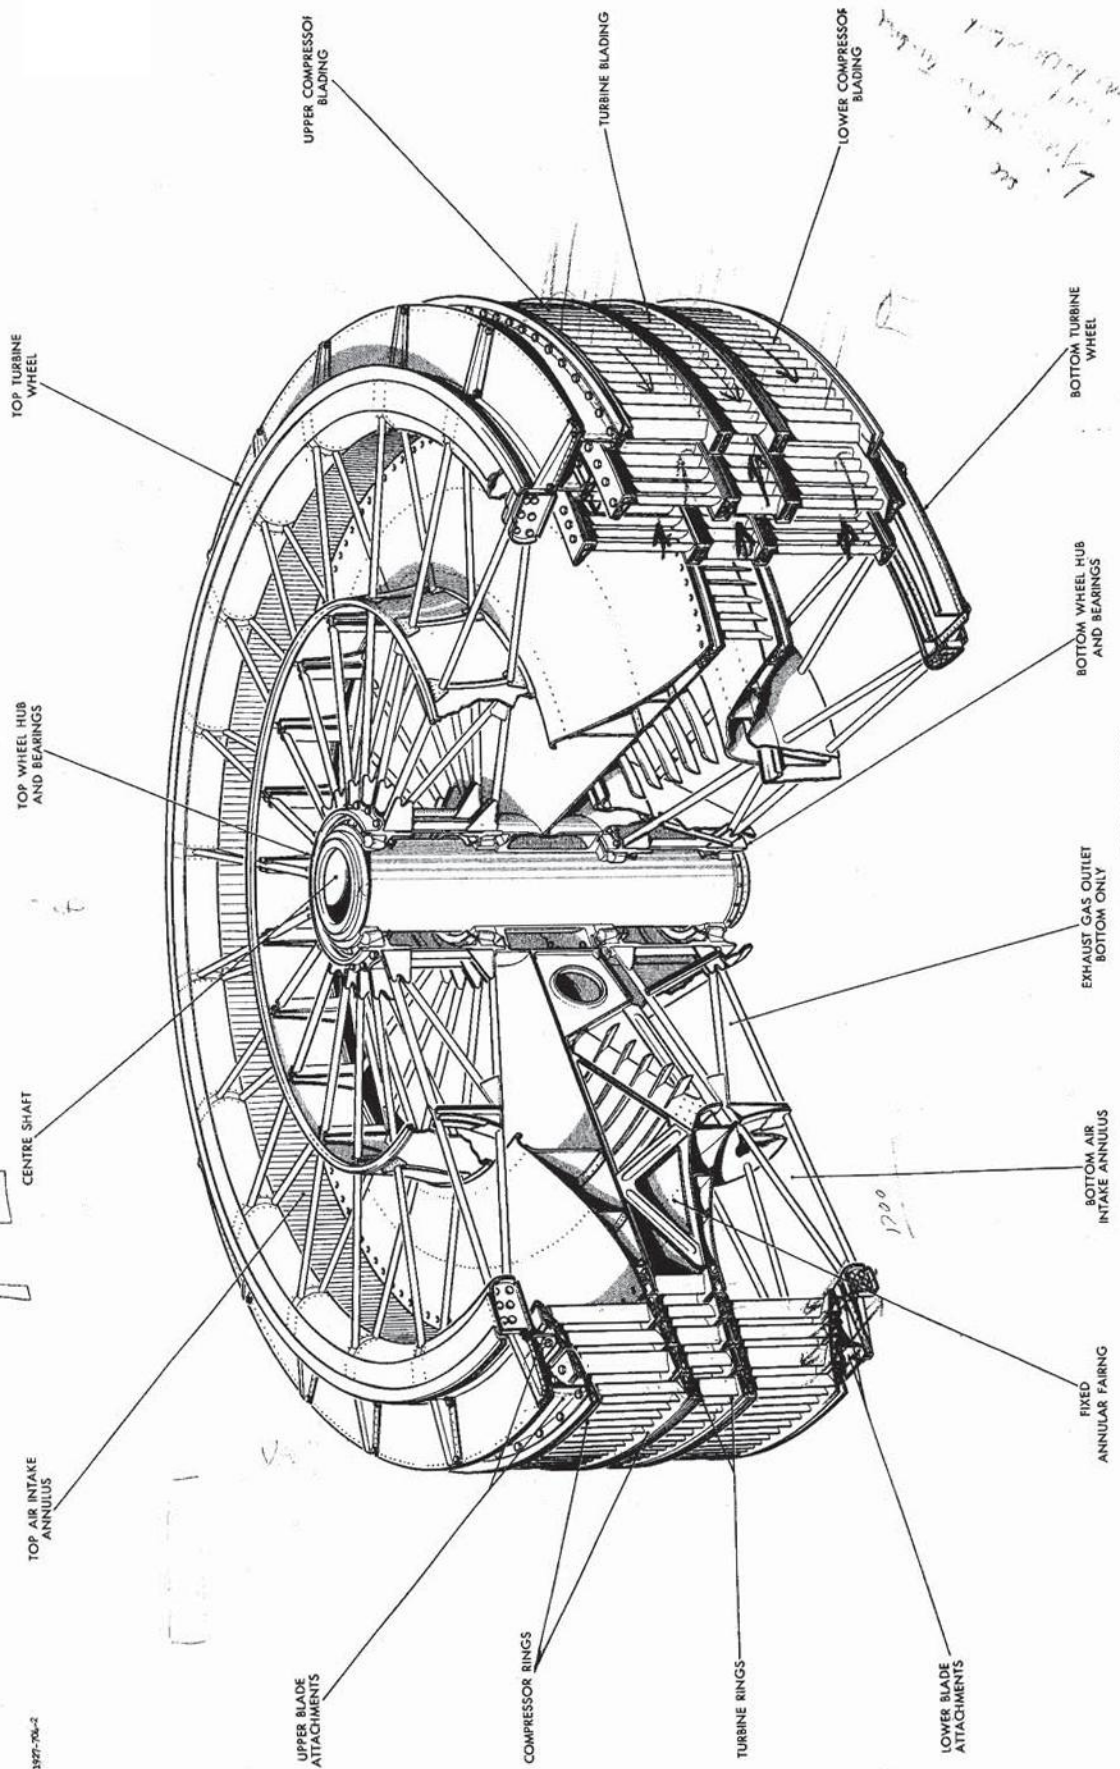

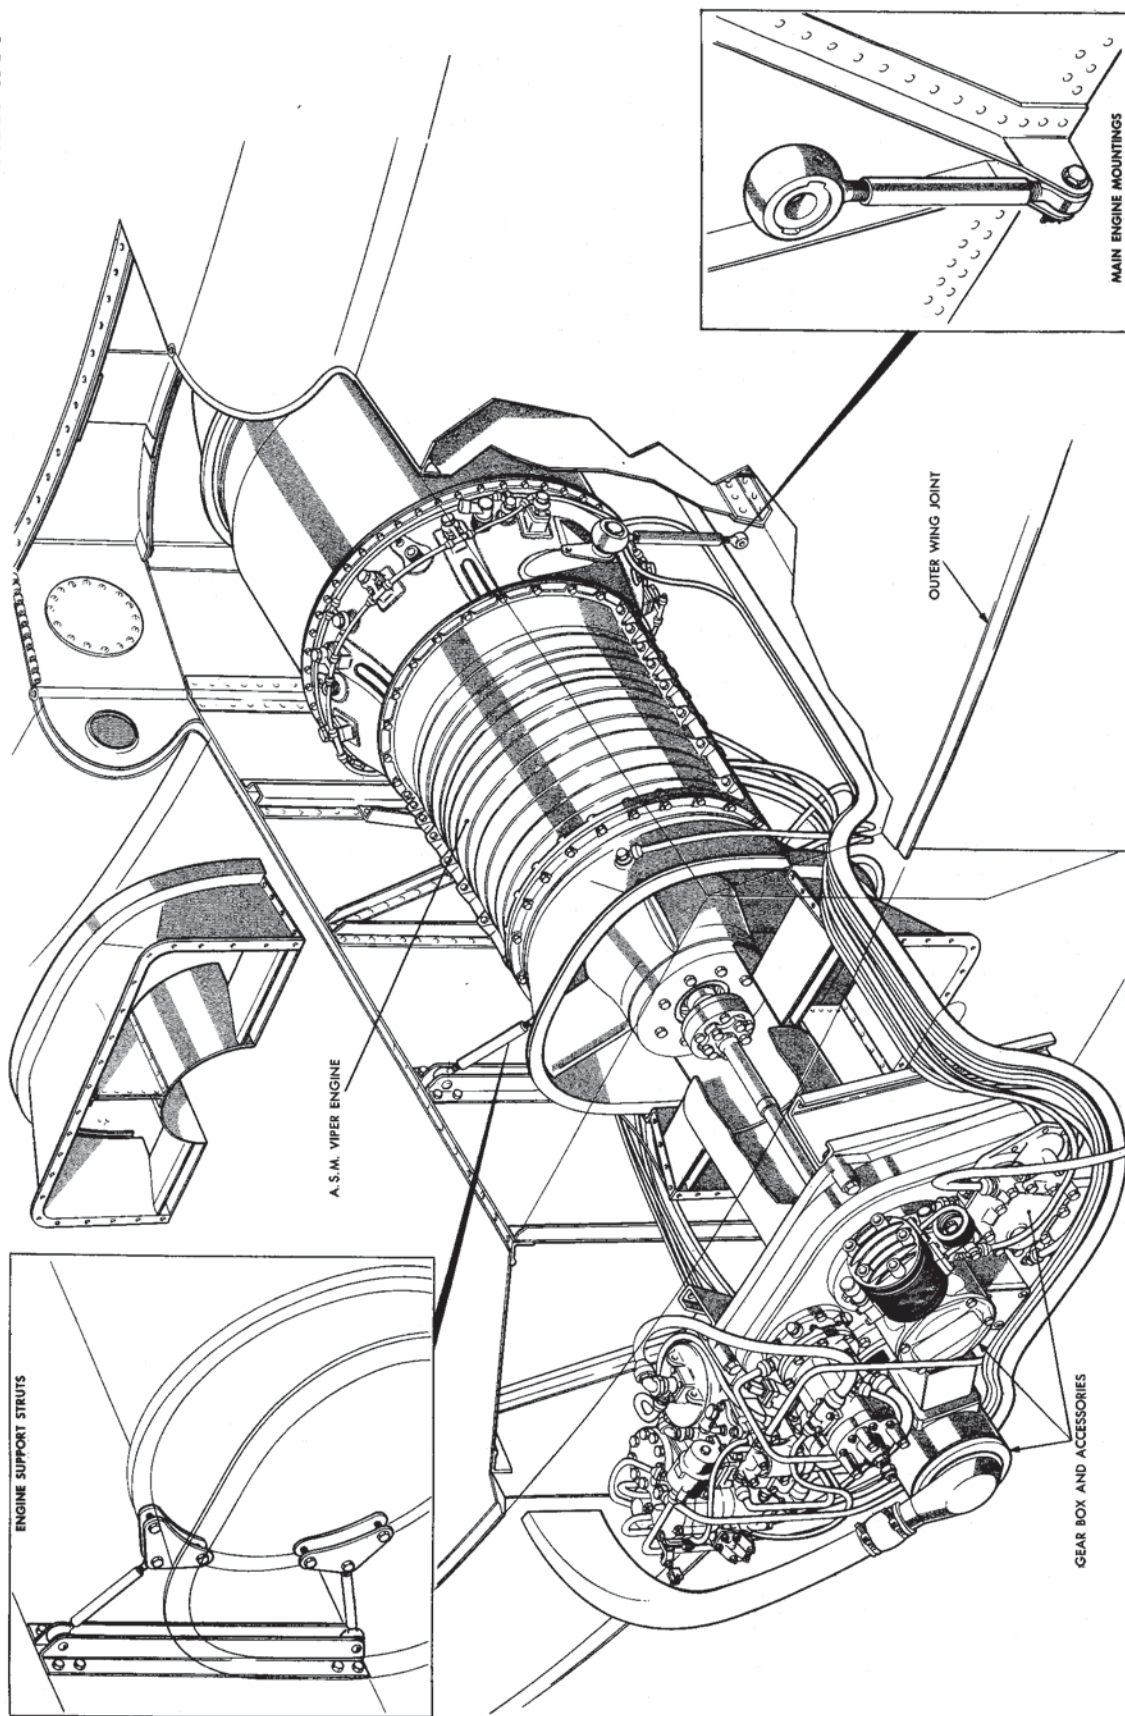

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

controlled shutters or gills (Fig. 5) which direct the jet as it exhausts all around the aircraft periphery; either to raise the aircraft vertically off the ground or to propel it in forward flight. This control of the exhaust direction enables the jets to be used for manoeuvring and stabilizing the aircraft in all flight conditions, so that separate additional controls are not required to cater for vertical take-off and hovering. Thus, for instance, to pull up the nose of the aircraft the pilot will control the shutters by means of a conventional stick control to direct the jet out of the top of the wing in the rear sector and thrust the tail down, or to roll he will similarly direct the jet from the top of one wing and from the bottom of the other. For stabilizing, the main rotors and a differential pressure diaphragm at the front of the wing are used to sense when the aircraft pitches in a gust and use is made of the jet controls to correct it. Stabilization through the controls is essential on this aircraft since the centre of gravity is in the middle of the wing at half the chord from the leading edge, whereas the aircraft would only be stable in pitch without using the controls if the centre of gravity were about at the quarter chord position. The change in jet direction as the aircraft pitches performs the same function as the fixed stabilizer of a conventional aircraft. For a detail explanation of the stabilizer system see Section 6.

In operation, to take-off, all the shutters on the top of the wing are closed and the shutters on the bottom are opened wide. Without adding fuel to augment it, a total of about 20,000 lb. thrust is produced by the jets pointing downward all around the wing together with the central nozzle; however, this jet-around-wing configuration produces a powerful take-off ground cushion so that the lift on the aircraft is, in fact, increased to possibly 30,000 lb., and the aircraft rises to about 17 ft. (Fig. 6) where the ground cushion effect falls off rapidly. For vertical take-off the thrust must be greater than the weight and thus without afterburning the fuel capacity will be restricted to approximately 3,500 lb: if afterburning to 1200°K proves feasible statically, approximately 30,000 lb. thrust can be produced, or 45,000 lb. lift within the ground cushion. It is envisaged that transition to forward flight will normally be from the ground cushion. By operating a transition control the pilot leans the jets backwards gradually, to accelerate the aircraft, and raises the nose; with the thrust less than the weight, the aircraft can accelerate and rise into free air a short distance from the starting point.

DECLASSIFIED

SECRET


DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

2137-1794-1

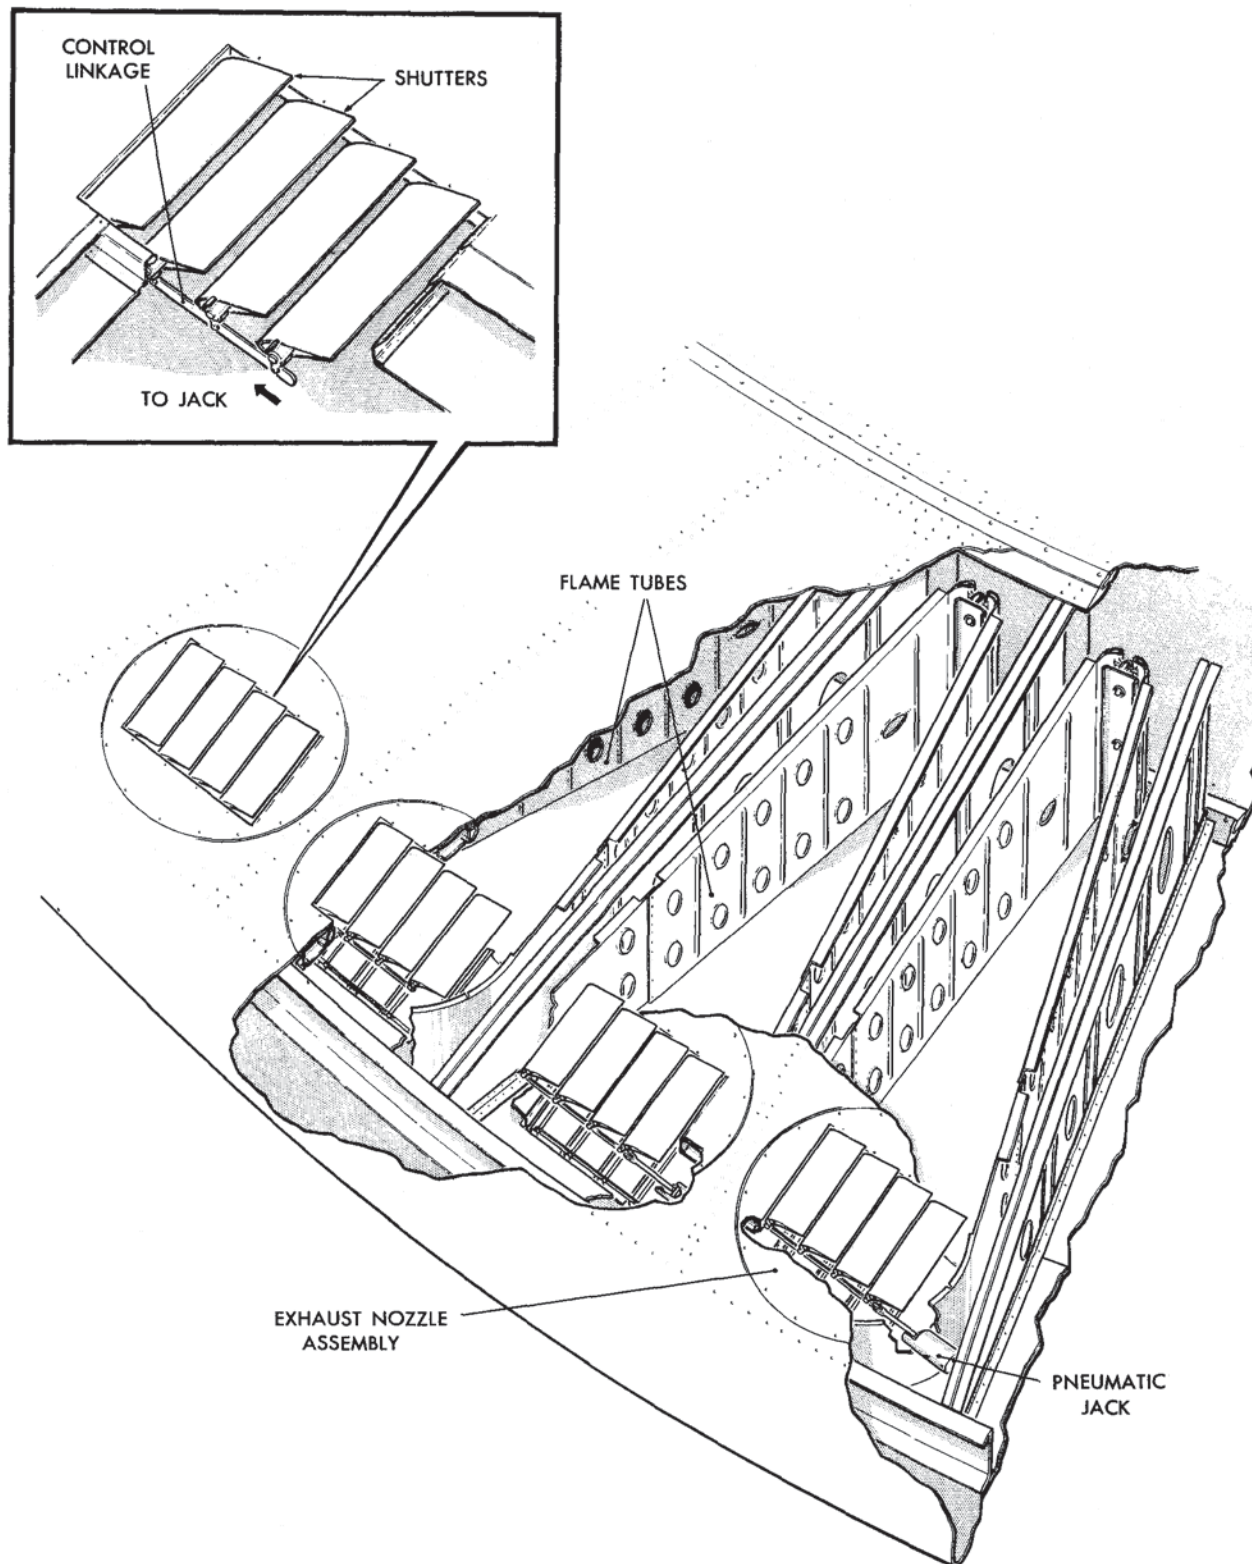

DECLASSIFIED

FIG. 5 FLAME TUBE AND FINAL NOZZLE ASSEMBLY

SECRET


DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

2138-1794-1

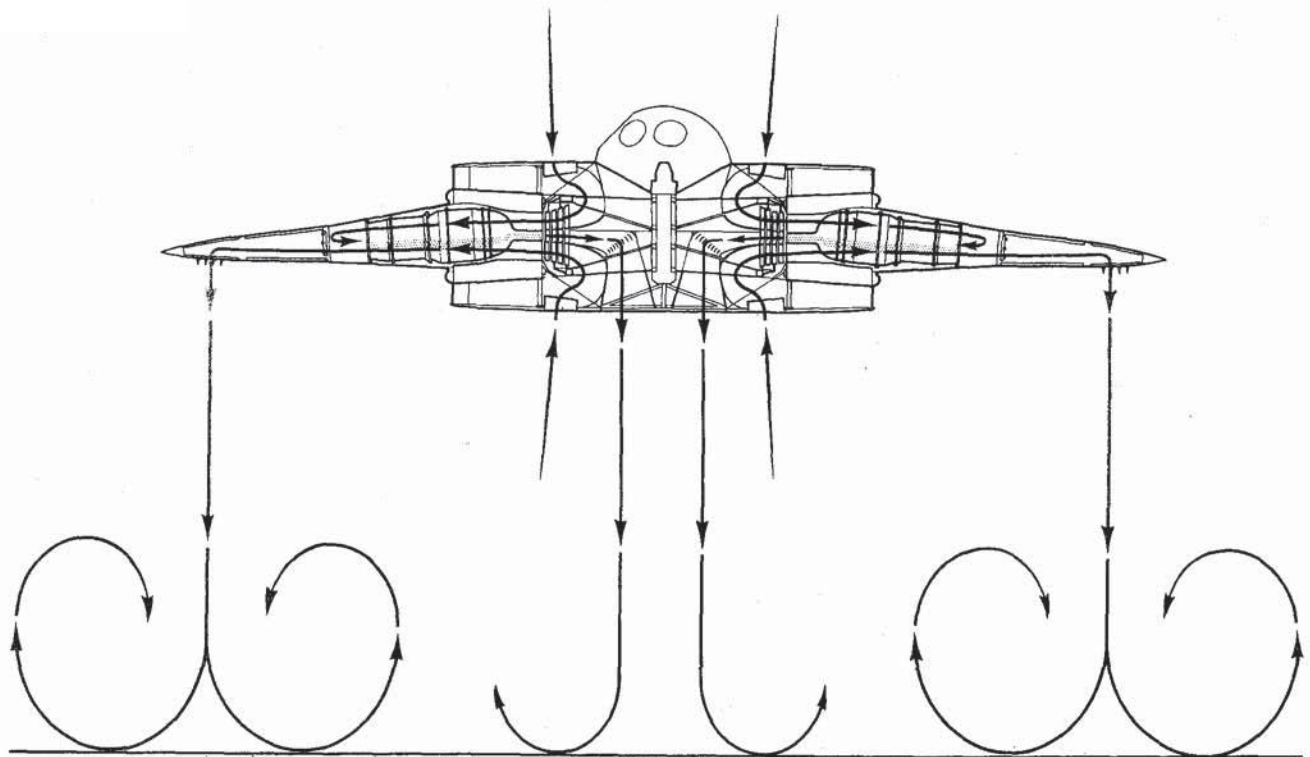

DECLASSIFIED

FIG. 6 FLOW DISTRIBUTION - HOVERING AND GROUND CUSHION

~~SECRET~~

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

In forward flight ram pressure is collected into the air intake, which progressively increases the afterburning pressure ratio and thermal efficiency. For supersonic speed, augmentation will always be necessary and because of the large mass of air the impellers can handle, a very large thrust and high top speed is possible. The large installed thrust also leads to a high thrust-to-weight ratio which makes a very high ceiling possible. The efficiency of the airframe at supersonic speed appears good and that of the engine reasonable, so that a long supersonic cruise range is also forecast.

For landing, a fully vertical descent will usually be made, with or without thrust augmentation from a hot main jet. Transition to the landing condition from in-flight is similar to the take-off transition. The nose is raised and the jets transferred to the undersurface and leaned downward collectively to rapidly slow the aircraft down; as the speed falls close to zero the nose is lowered and the aircraft brought down into the ground cushion. The pilot must then close the throttle to reach the ground.

Tests completed under contract AF33(600)30161 (Supplemental Agreement No 1), have largely confirmed the performance potential and basic feasibility predicted for this new type of aircraft and confirmed Avro Aircraft Limited in their resolve to risk the building of a prototype in the shortest possible time.

The tests have also, however, inevitably shown up the need for further test work in certain areas. Additionally in this phase of work it is desirable to cover other areas not previously investigated, such as the transonic speed range and the very low speed transition regime.

Furthermore in the previous program effort was confined to design study of a research type aeroplane and it is also desirable to include study of the application of the aircraft to a weapon system in the next development phase. These considerations form the basis for the detail proposals which follow.

The work proposed is described under the following headings:

- (a) Design and performance.
- (b) Aerodynamics.

DECLASSIFIED

~~SECRET~~

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

- (c) Propulsion.
- (d) Stability and control.
- (e) Structures.

Every effort has been made to outline the proposed course of work in detail. It is however likely that in the course of a twenty month program additional items not now foreseen will appear essential, and others now planned may become relatively unimportant. Any changes to the planned USAF program will be with the prior approval of the USAF and will be reported in the bi-monthly progress reports required in Section 8. These will also record any changes in the P. V. 704 program.

DECLASSIFIED

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

Statement
of Work
Sub Parts

3. DESIGN AND PERFORMANCE

3.1 Design Study

1.1.9

A design study will be made to apply the Avro Aircraft VTOL design concept to one of the following, whichever is considered the most suitable: 1.1.9.1

- (a) Special reconnaissance weapon system.
- (b) Interceptor weapon system.
- (c) Fighter bomber weapon system.

The study will include general assembly drawings, installation drawings for equipment and stores carried and weight and performance data with supporting information.

In addition, a general design specification for a USAF research aircraft based on P.V.704 will be submitted. MIL-D-8034 and MIL-C-5011A will be used as a guide in presenting information.

Design information will include investigation of the following:

- (a) The effect of temperatures on the structural strength and rigidity of the aircraft including the effect due to aerodynamic heating, gas generator exhaust and outer wing combustion. (It is anticipated that this will form part of the required stress analysis, the scope of which is defined in more detail in Section 7 of this program). 1.1.9.2
- (b) Crew escape procedures and systems. 1.1.9.3
- (c) The ground handling requirements of the aircraft including take-off and landing surface requirements. 1.1.9.4
- (d) The range of fuel stowage compartment temperatures, and the provision of suitable stowage conditions. 1.1.9.5
- (e) Cooling and pressurization requirements of crew equipment and structure. 1.1.9.6

DECLASSIFIED

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

Statement
of Work
Sub Parts

3. DESIGN AND PERFORMANCE

3.1 Design Study

1.1.9

A design study will be made to apply the Avro Aircraft VTOL design concept to one of the following, whichever is considered the most suitable:

1.1.9.1

- (a) Special reconnaissance weapon system.
- (b) Interceptor weapon system.
- (c) Fighter bomber weapon system.

The study will include general assembly drawings, installation drawings for equipment and stores carried and weight and performance data with supporting information.

In addition, a general design specification for a USAF research aircraft based on P.V.704 will be submitted. MIL-D-8034 and MIL-C-5011A will be used as a guide in presenting information.

Design information will include investigation of the following:

- (a) The effect of temperatures on the structural strength and rigidity of the aircraft including the effect due to aerodynamic heating, gas generator exhaust and outer wing combustion. (It is anticipated that this will form part of the required stress analysis, the scope of which is defined in more detail in Section 4 of this program). 1.1.9.2
- (b) Crew escape procedures and systems. 1.1.9.3
- (c) The ground handling requirements of the aircraft including take-off and landing surface requirements. 1.1.9.4
- (d) The range of fuel stowage compartment temperatures, and the provision of suitable stowage conditions. 1.1.9.5
- (e) Cooling and pressurization requirements of crew equipment and structure. 1.1.9.6

DECLASSIFIED

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

Statement
of Work
Sub Parts
1.1.9.7

- (f) Performance trade data for the aircraft in respect of such items as range, payload, ceiling, maximum speed, etc.

It is generally understood that only information relevant to design proposals will be presented, whether for components, sub systems, or any other items; comprising a list of equipment, with description and artist's conception drawings. Performance or design specifications for any new suggested items of equipment will not be included. It is, however, understood that the design study for the weapon system will include a model specification to the format outlined in specification MIL-I-6252, to the extent called for in MIL-D-8034.

It is visualized that drawings will be provided approximately as follows:

- (1) A three-view general arrangement of the complete aircraft, tabling its leading particulars and a numerical list of the subsidiary study drawings.
- (2) A three-view arrangement containing an inboard profile of the aircraft, a diagram of the component breakdown, and a diagram illustrating internal flow of gases.
- (3) A geometry drawing of the complete aircraft defining major dimensions and wing profile.
- (4) Drawings of the cockpit arrangement showing pilot's equipment and furnishings, instrument panels and consoles, aircraft and power plant controls, navigation and communications equipment, crew entrance and escape, cooling and pressurization equipment.
- (5) Drawings of the engine installation showing air intake and gas exhaust system, auxiliaries gear-box arrangement, controls and services provisions.
- (6) A drawing of the central turbine-compressor showing main shaft and bearings, fixed and

SECRET DECLASSIFIED

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

rotating structures, typical ring and blade assemblies with adjacent stators and seals, and lubrication system.

- (7) A drawing of the centre aircraft structure showing integral fuel tank and mid wing assembly, including alighting gear and its attachments.
- (8) A drawing of the aircraft outer wing structure showing installation of combustor cans and accessories together with hot gas exhaust shutters.
- (9) A drawing of the aircraft upper and lower intake structure showing ramp and entry arrangement, hovering doors, internal vanes and cascades.
- (10) A diagram of the aircraft control system depicting the pilot's central control valve, trim and hovering valves, shutter valves and jacks, afterburner valves, and associated pneumatic systems.
- (11) A diagram of the aircraft fuel system depicting tank pressurization, tank interconnects and vents, fuel filling arrangements, anti G provisions, supply to engines and combustor systems.
- (12) Drawings showing ground handling arrangements including removable cowlings and access doors, engine replacement, turbine-compressor removal, aircraft towing picketing and hoisting attachments, external charging connections.
- (13) A diagram showing electrical power source and services, and tabling a preliminary power load analysis.
- (14) Drawings showing armament and/or reconnaissance equipment installations together with associated electronic equipment.

Design information as required by MIL-D-8034 will also include the following items:

- (1) Plot of centre of gravity travel and analysis of effects.

DECLASSIFIED

~~SECRET~~

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

- (2) Group Weight statement in accordance with form AN9103 and substantiating data.
- (3) V-n diagram with gust considerations in accordance with MIL-S-5702.

In presenting performance information for the weapon system design study the requirements of specification MIL-C-5011A will be followed.

In connection with performance prediction however it may be noted here that there are special problems associated with the particular aircraft configuration proposed. It is usual to predict the performance of an aircraft from estimates of thrust and drag which are obtained separately on the assumption that thrust has little or no influence on drag or trim requirements. In the case of Project 1794 this assumption cannot be justified, partly on account of jet interference effects and partly on account of the relation between trim requirements and jet deflection. The precise meaning of thrust and drag becomes somewhat obscure and wind tunnel tests provide values of net propulsive force (thrust minus drag).

The required analyses of performance may then be based either on an arbitrary separation of thrust and drag, which provides to some extent for the effects of interference and trim requirements, or on very extensive wind tunnel tests designed to provide values of net propulsive force for a wide variation in jet coefficient, jet control parameter and intake mass flow. It is anticipated that a combination of both methods will be employed in performance prediction for the above studies, to obtain performance data over the entire range of speed and height. Take-off and transition performance is a special case to which the above remarks also apply - but consideration must be given in addition, to the aerodynamic characteristics with various transition control positions. The basis of performance prediction will form part of the substantiating data report required by MIL-C-5011A.

The following specific items will also form part of the substantiating data report:

- (1) Plot of area distribution cut at Mach 1.0.
- (2) Tabulation of wetted areas.

DECLASSIFIED



- (3) Zero lift drag build-up, components and total.
- (4) Plot of dC_D/dC_L^2 vs. Mach No.
- (5) Plot of aerodynamic centre travel vs. Mach No.
- (6) Variation of $dC_L/d\alpha$ vs. Mach No.
- (7) Low speed aeroplane efficiency factor 'e'.
- (8) Substantiation of drag factors and thrust.
- (9) Take-off, landing and transition calculations.
- (10) Plot of L/D max and Mach No.
- (11) Plot of C/L optimum and C_L actual vs Mach No.
- (12) Plots of L/D vs C/L.

} new

Performance information as required by MIL-C-5011A will include the applicable mission profiles showing altitude vs. distance.

3.2 Prototype P.V. 704 Design

The prototype P.V. 704 design was started in December 1955 with the design of the basic structure and powerplant installation for first test of the propulsion unit, as described in Section 4. For prototype completion to the tethered test stage the other major items are the outer wing, the cockpit and flight test instrumentation and a tethering rig, the latter probably consisting mainly of a large crane.

The design of the basic structure and propulsion unit is now substantially complete and it is expected that the additional items together with all preliminary modifications to the rig design required by the prototype will be completed in July 1957.

3.3 Work Chart Scheduling and Cost

A chart illustrating the work content in the design and performance group is presented in Fig. 7. It will be appreciated that the scheduling for this work, as shown on the following page in Fig. 8 is contingent upon the completion of design for test, items required by certain fixed dates (now tentatively suggested). Cost and manhour estimates are shown on pages 95-108.


DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

2234-1794-1

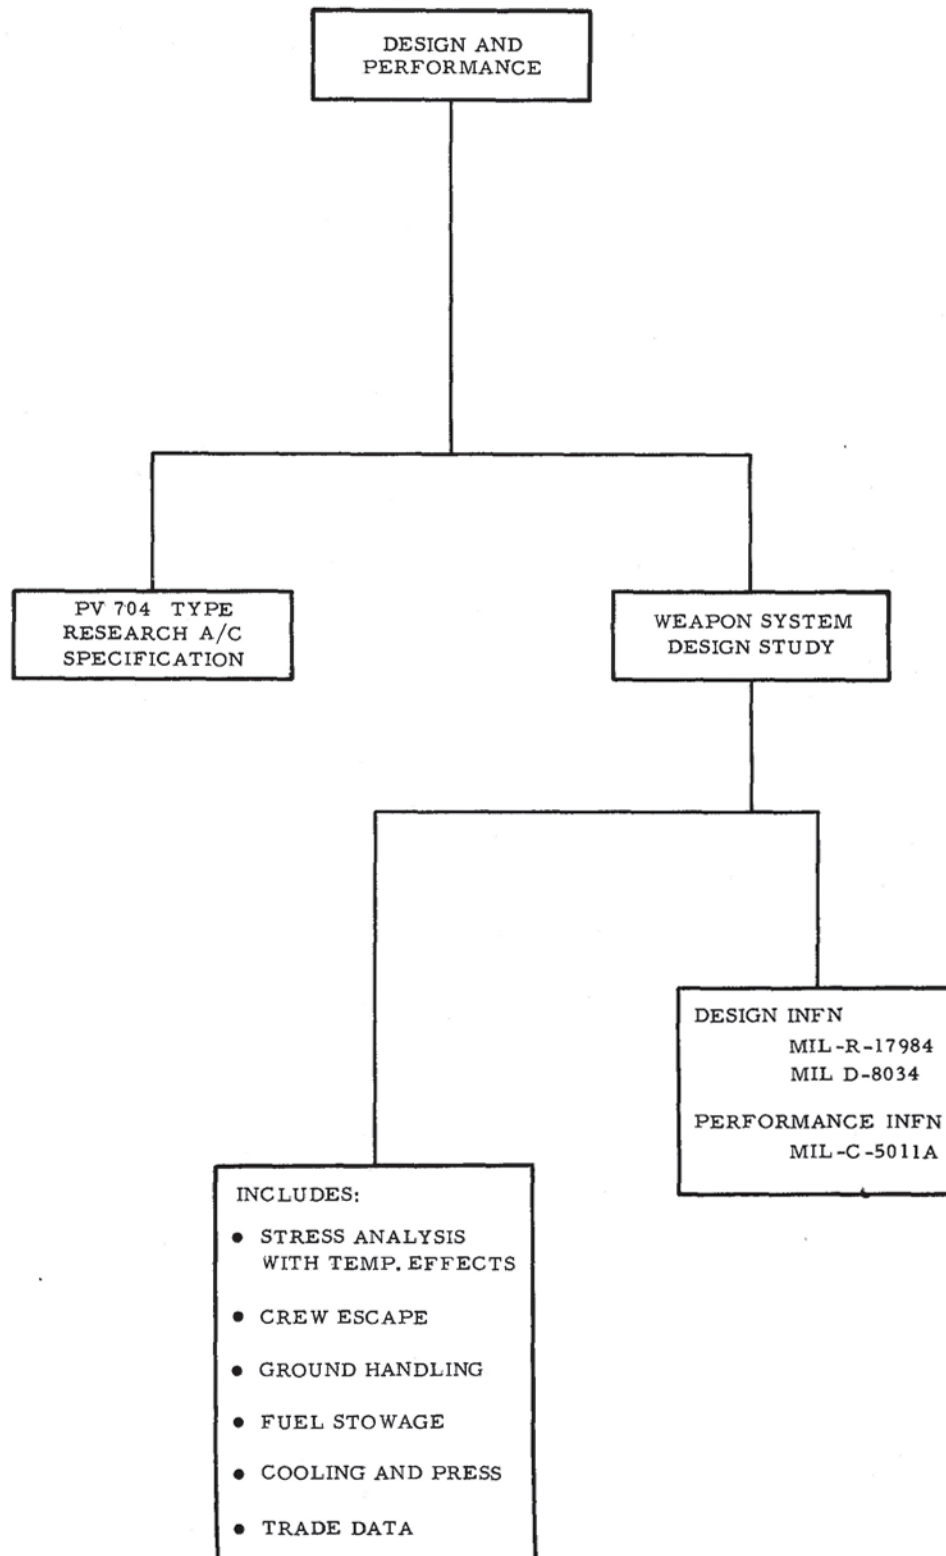

DECLASSIFIED

FIG. 7 WORK CHART - DESIGN AND PERFORMANCE

DECLASSIFIED

AVRO AIRCRAFT LIMITED

PROJECT 1794

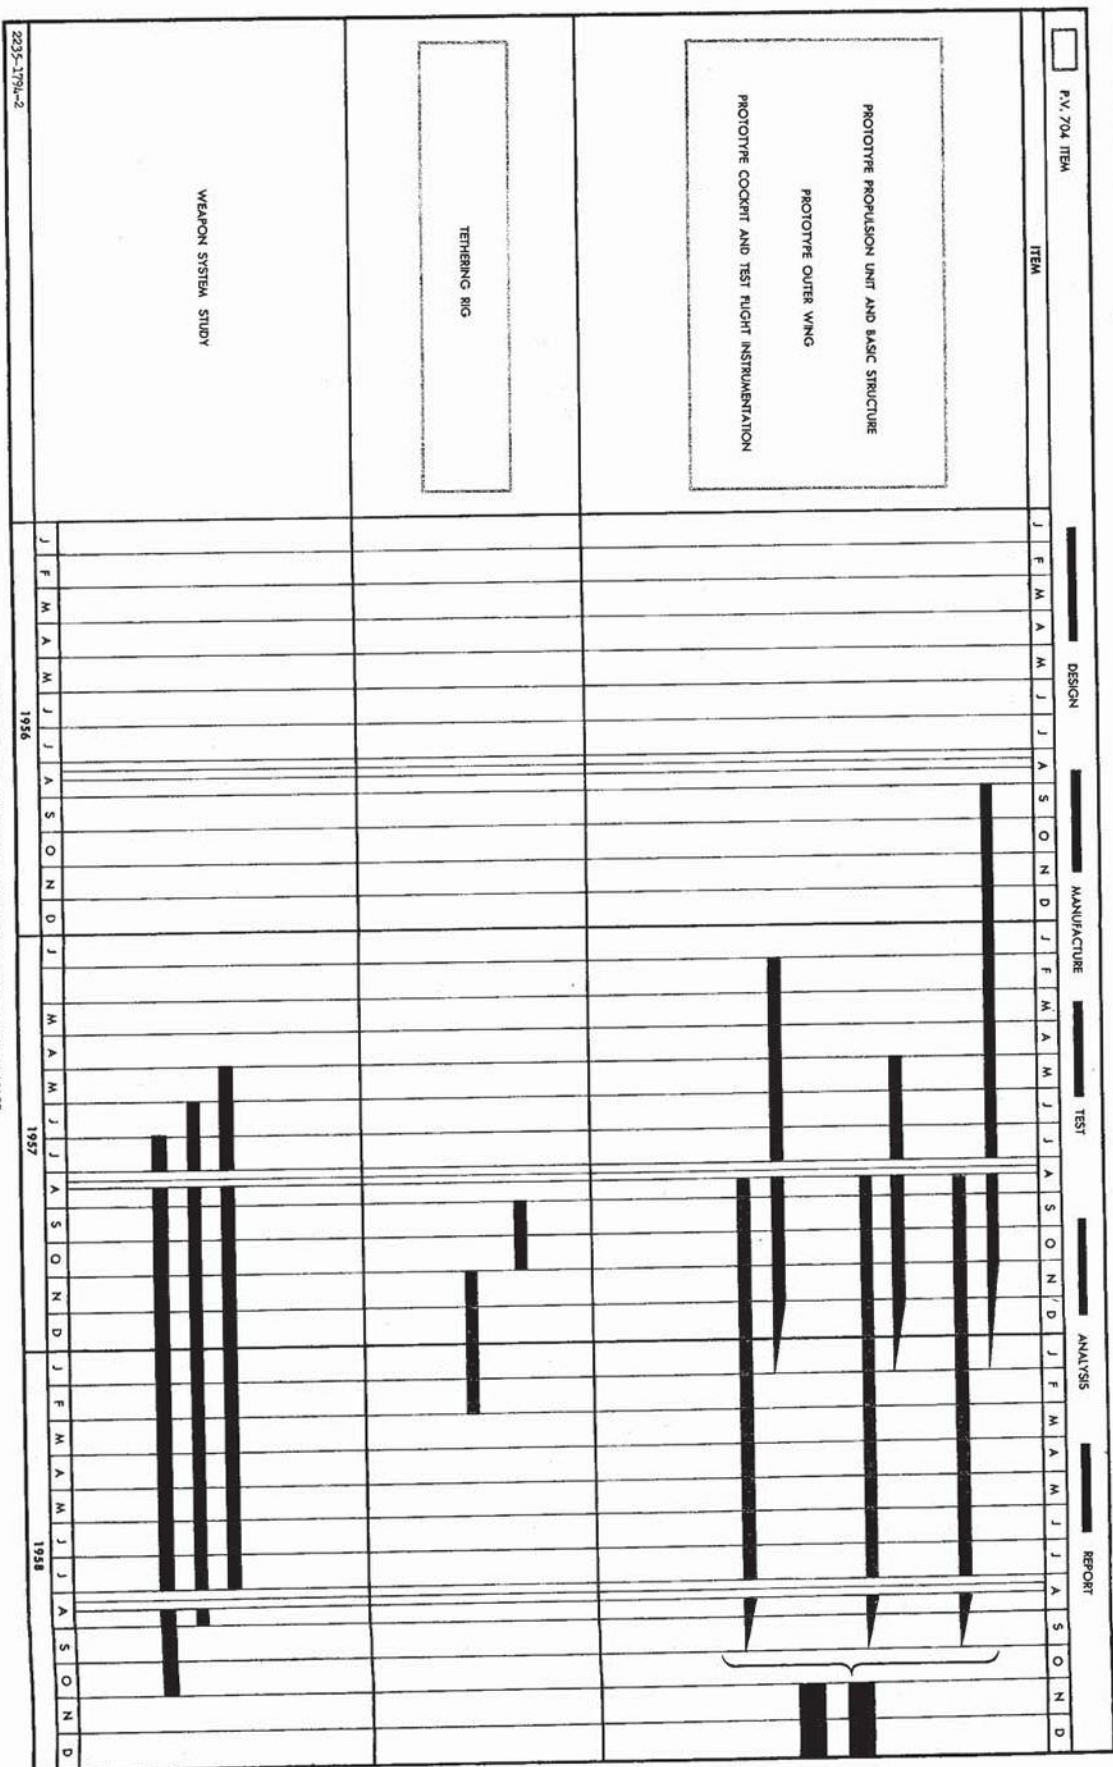


FIG. 8 WORK SCHEDULE CHART-DESIGN AND PERFORMANCE

~~SECRET~~

DECLASSIFIED

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

Statement
of Work
Sub Parts

4. AERODYNAMICS

4.1 Prototype Weight and Load Analysis

Prototype P. V. 704 weight and load analyses are presently being carried on and will form part of the research aircraft specification required by the USAF under Section 3.

4.2 Wind Tunnel Tests

To supplement and extend the range of the results of the wind tunnel tests carried out under the terms of the previous contract, it is proposed to carry out a further series of tests through the whole speed range. Past experience will prove useful in determining the ranges of the various test parameters required more exactly, and will serve to provide models and test equipment of higher standards.

4.2.1 Hovering and Transition Tests

1.1.4

A number of hovering and transition tests have already been carried out on the 1/6th scale subsonic model. However, in view of the 'hysteresis' encountered, the validity of using a reflection plane model for tests of this nature is subject to considerable doubt. A new hovering and transition model is, therefore, proposed; to employ the same air supply and evacuation system as was used for the 1/6th scale model referred to above. Fig. 11 showing an early scheme is included to illustrate the general method, although this scheme has been superseded by an alternative which gives a symmetrical travel flow.

In this type of model the intake and exhaust air has to pass through the strut, thereby making it uncommonly large and the main objection to such models is the consequent large strut interference. At very low speeds where the aerodynamic drag is of relatively small importance, this objection becomes less pertinent and the use of such models more attractive. However, to keep the size of the mounting and supply pipe to reasonable proportions, it is proposed to confine the intake flow simulation to the lower intake only, particularly as it has been found from the 1/6th scale model tests that the effects of the intake in forward flight are small.

DECLASSIFIED

SECRET

DECLASSIFIED



PROJECT 1794



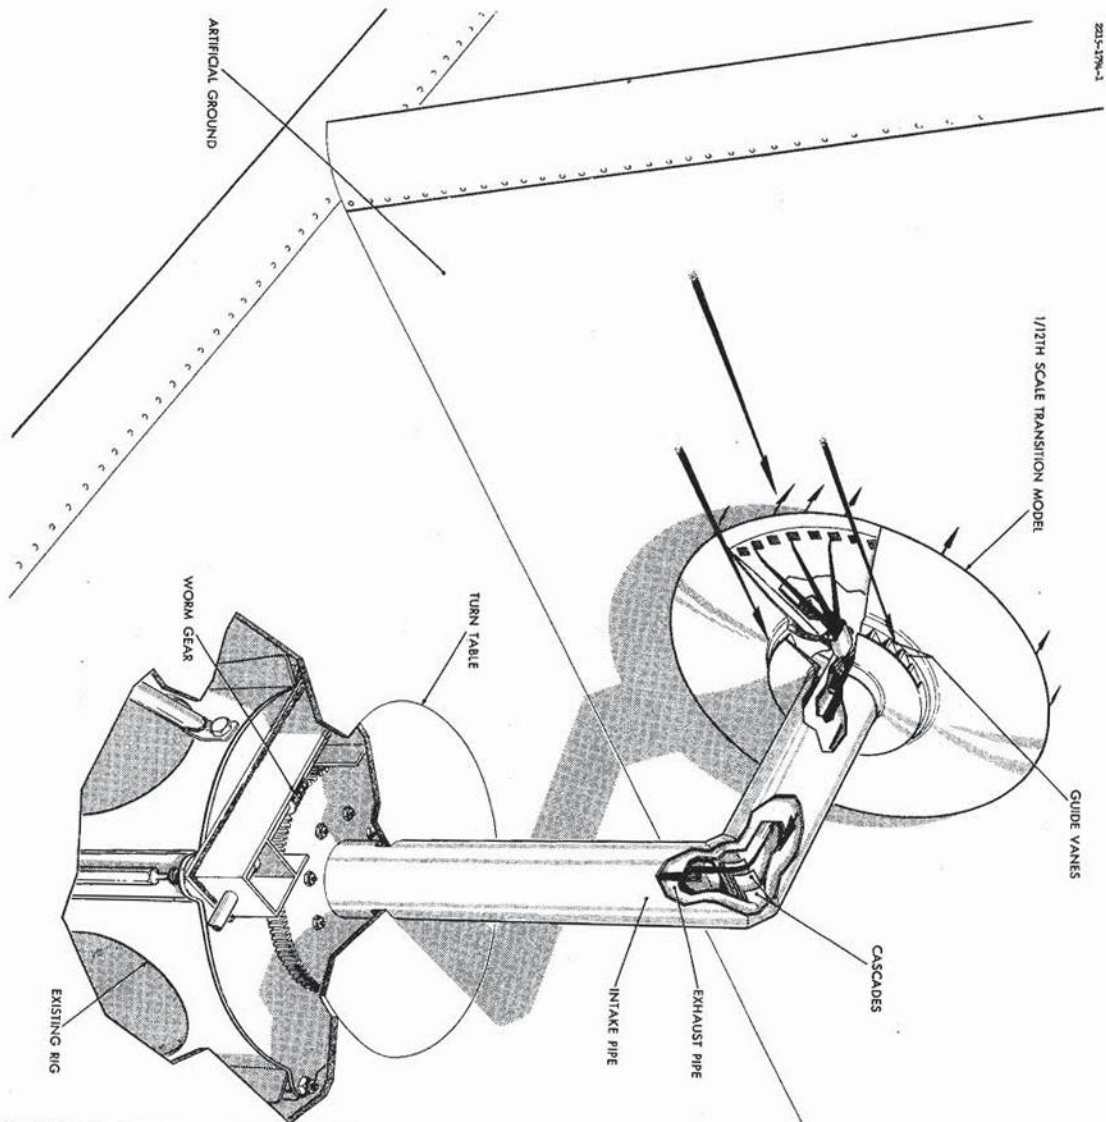


FIG. 11 PROPOSED 1/12TH SCALE TRANSITION MODEL

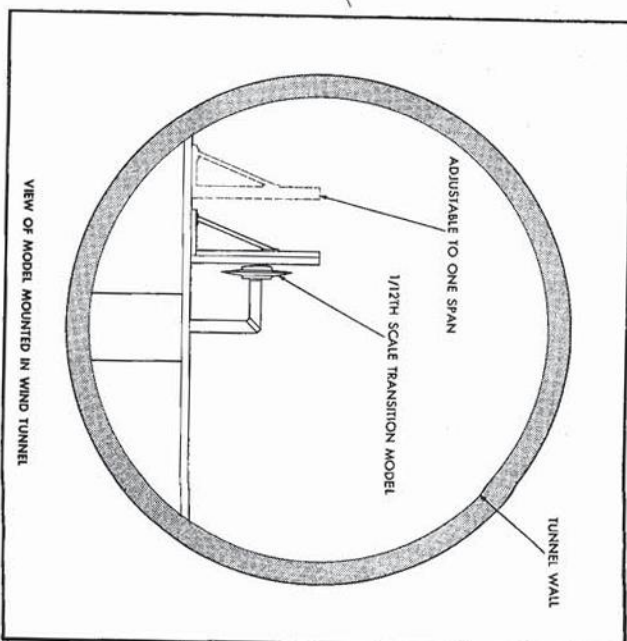

VIEW OF MODEL MOUNTED IN WIND TUNNEL

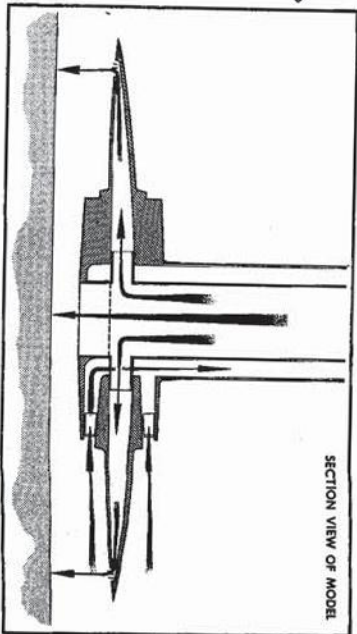

SECTION VIEW OF MODEL

DECLASSIFIED

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

Statement
of Work
Sub Parts

The scale suggested is 1/12th, and since this is a complete model, approximately half the air supply used on the 1/6th scale model will be required. Furthermore the reduced scale is an advantage from the point of view of minimizing tunnel boundary effects and it is in the transition regime where these are likely to be of consequence. This consideration was limiting as to the lowest speed used in the previous tests and with the smaller model it will, in general, be desirable to test to considerable lower tunnel velocities than were used in the previous program. Also some important extensions to the hovering tests, particularly with control in the presence of the ground, are known to be required.

Finally, it is desirable to carry out a few comparative tests on the 1/6th scale model and this is proposed as part of a further series of tests on the latter as outlined in the next section.

4.2.2 Subsonic Wind Tunnel Tests

1.1.3

It is proposed to carry out a further series of tests on the 1/6th scale reflection plane model, the principal purpose of which being to measure the wing surface pressure distribution in various conditions. This will require the installation of a large number of static orifices on the model wing surfaces. The model and installation is illustrated by the photograph of Fig. 12 and the schematic perspective of Fig. 13.

It is also considered desirable to conduct over-lapping tests with the transition model as explained in the previous section and it is believed that valuable results with regard to subsonic drag and more particularly the effect of jet displacement on the aerodynamic characteristics of the aircraft can be obtained with a moderate expenditure of tunnel time.

It is thought that most of the existing shortcomings of the balance, and of the air supply and evacuation systems can be eliminated and it is hoped that a sealed balance, eliminating the so-called air bearing, can be made to give a satisfactory calibration.

4.2.3 Transonic Wind Tunnel Tests

1.1.2

Wind tunnel force measurements on the configuration have

DECLASSIFIED

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

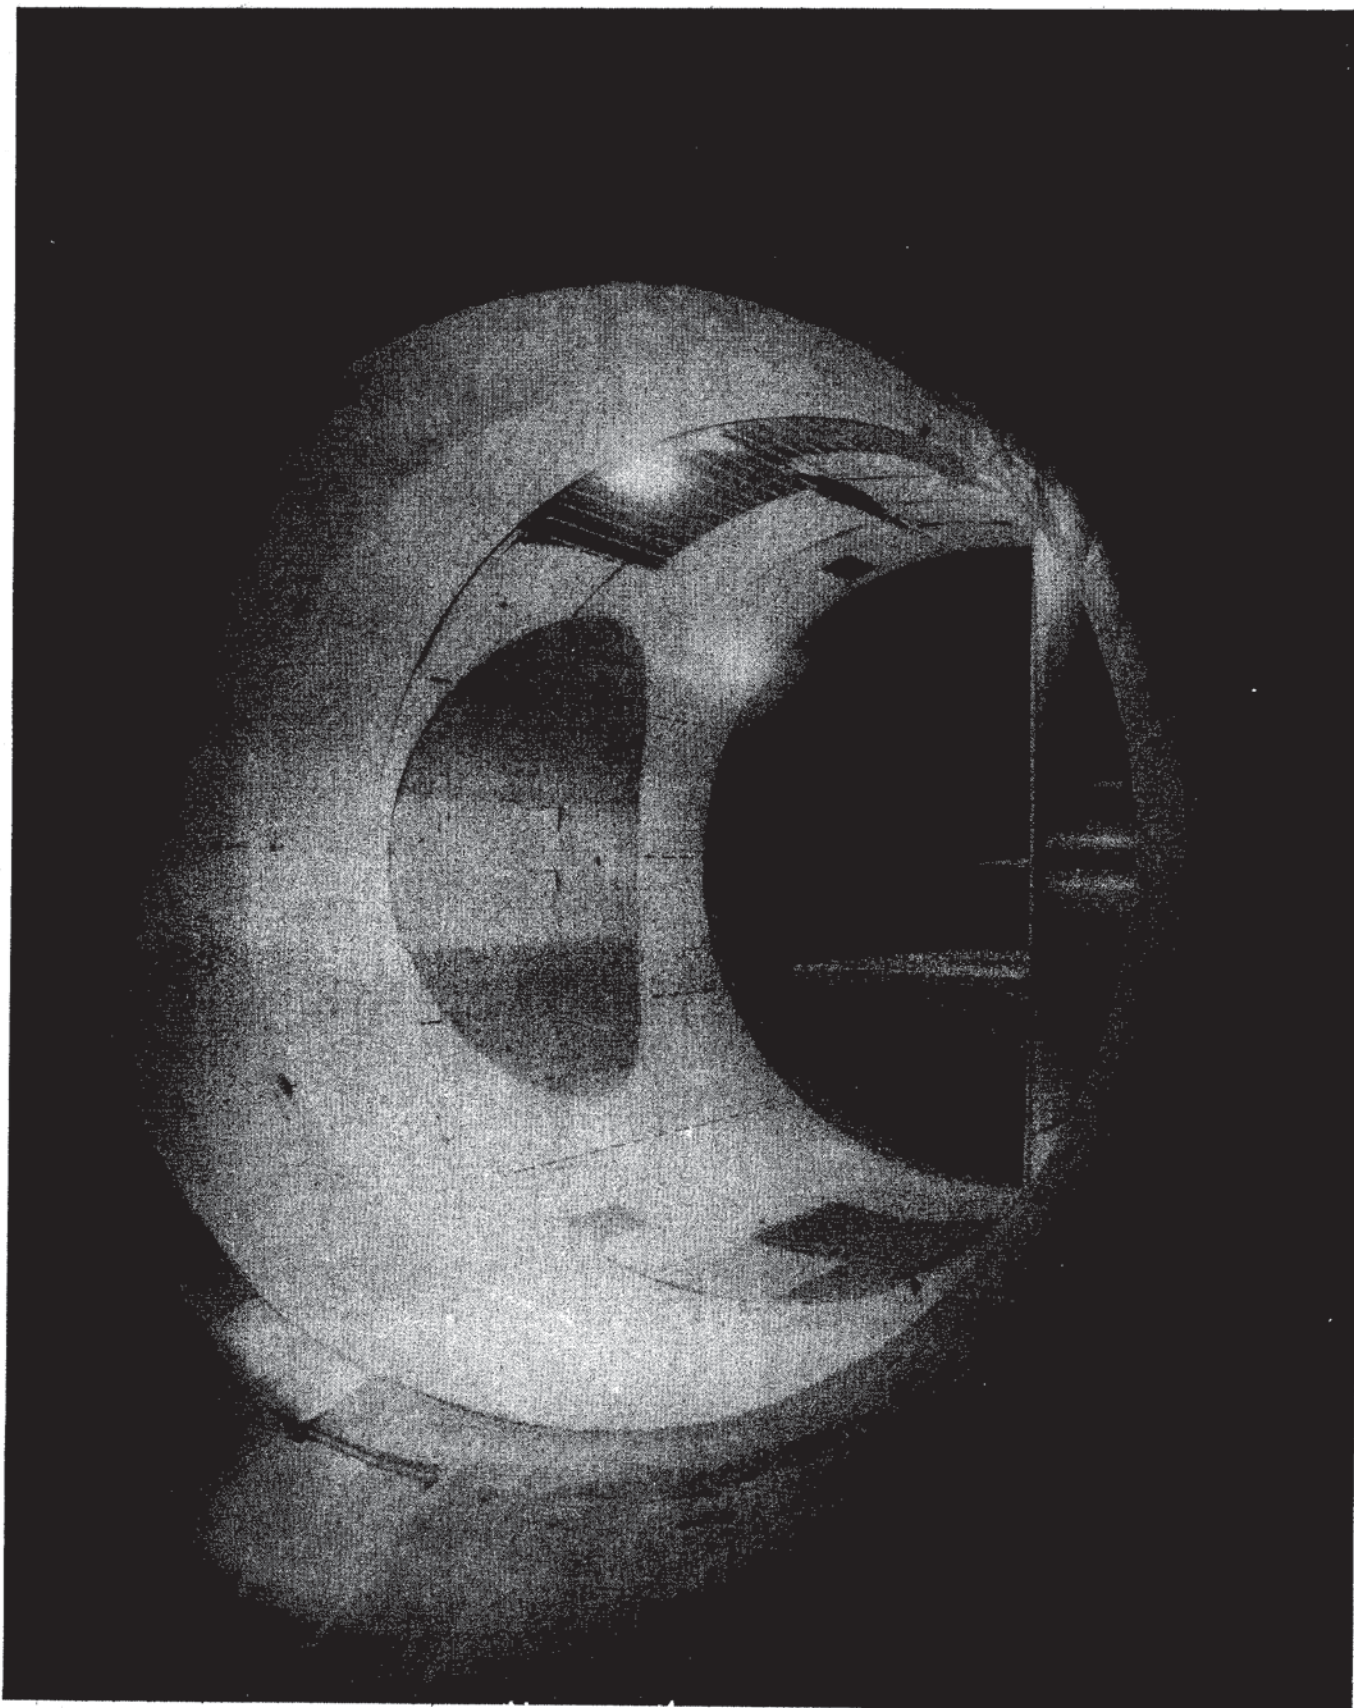


FIG. 12 1/6 SCALE MODEL IN TUNNEL


DECLASSIFIED

~~SECRET~~

DECLASSIFIED

PROJECT 1794

100-1794-3

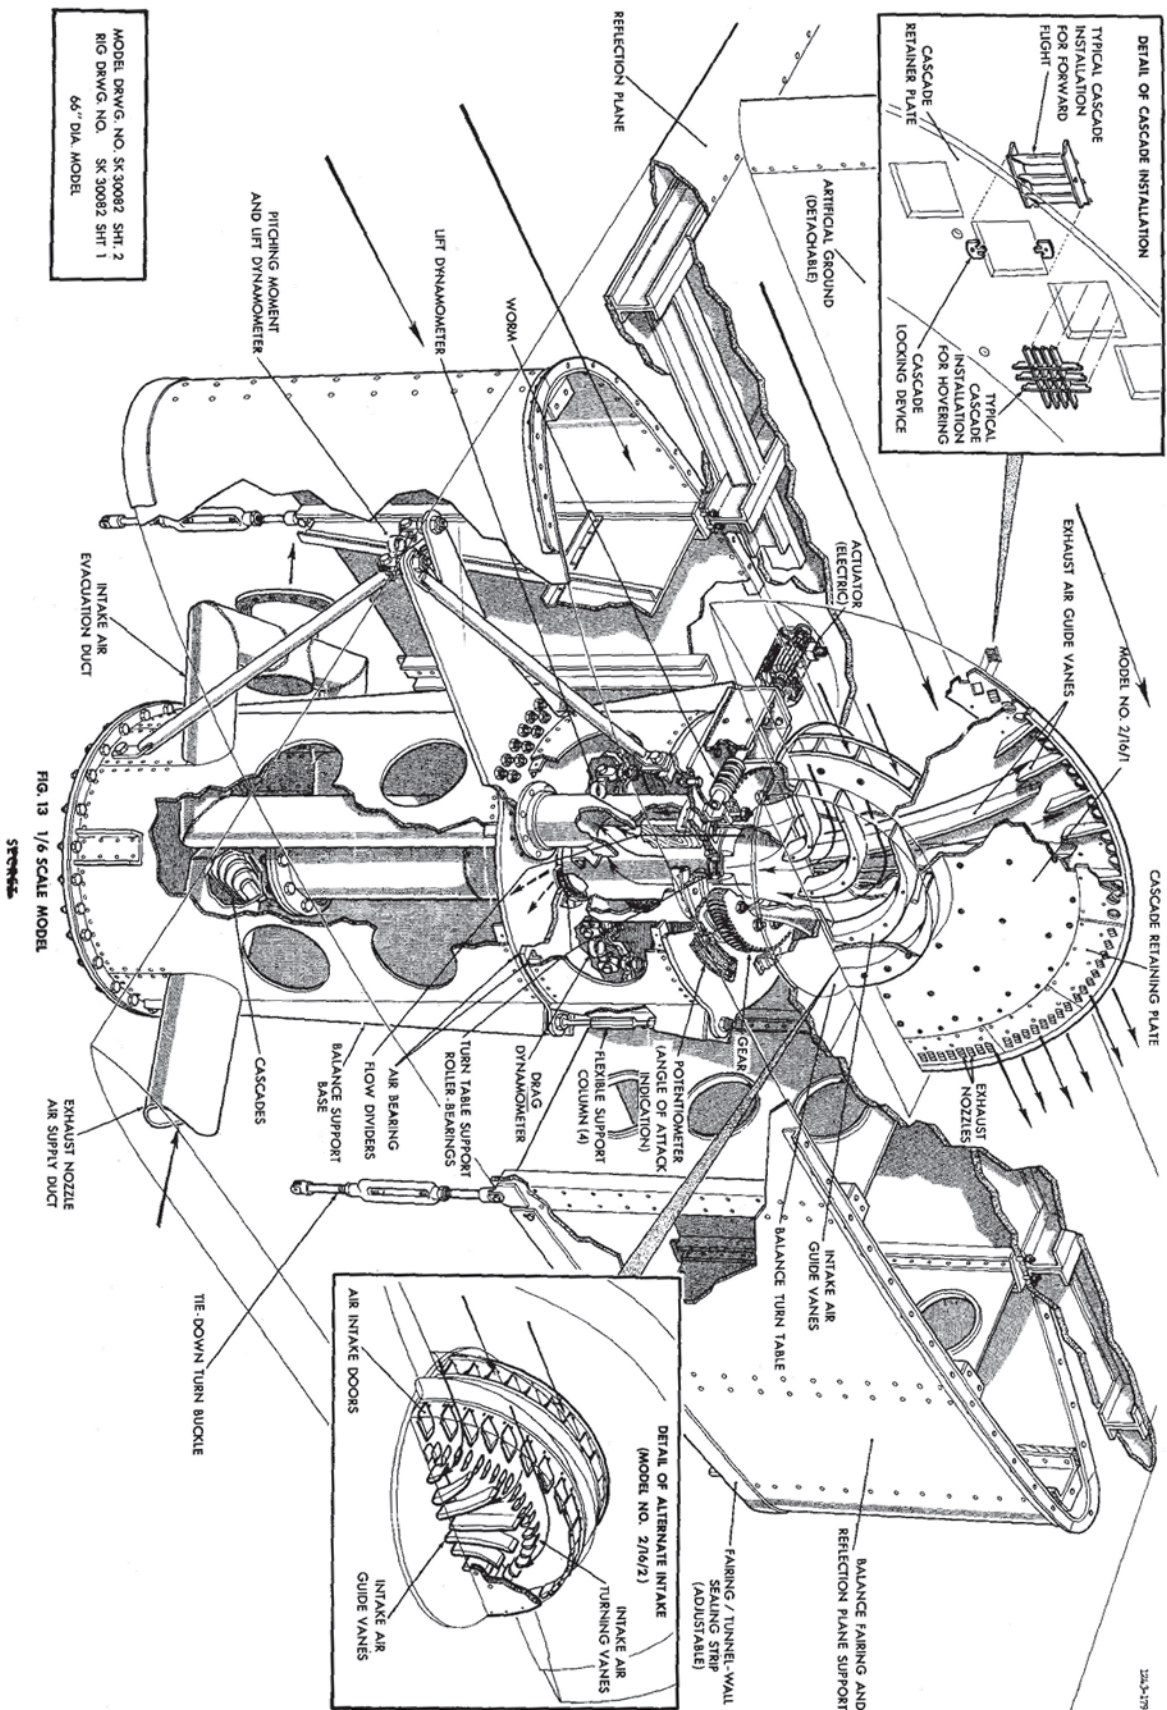

DECLASSIFIED

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

Statement
of Work
Sub Parts

so far been confined to the subsonic speed range and to supersonic speeds between Mach 1.5 and Mach 3. Transonic tests are considered essential in the next phase of work, particularly in view of the fact that the thrust drag margin is calculated to be at a minimum in this regime. A 1/12th scale reflection plane force model with fully simulated intake and jet flow is therefore proposed, similar to the 1/6th scale subsonic model and 1/23rd scale supersonic models already tested; predicated upon the use of the 10 ft. diameter tunnel at WADC. It is intended to obtain stability and control as well as performance data, and the similarity in basic requirements of this and previous models will make the experience gained invaluable in obtaining accurate and reliable instrumentation.

A preliminary drawing showing a tentative scheme for the installation of this model is given in Fig. 14. Tunnel scavenge air will be used to supply the jet flow and the scavenge system is expected to be able to absorb that of the intake. With the tunnel operating at a stagnation pressure of half an atmosphere it is believed that the full scale aircraft flows can be simulated satisfactorily.

It is also planned to obtain transonic component drag data from a 1/40th scale sting mounted model in the Naval Supersonic Laboratory at Massachusetts Institute of Technology, as more fully explained in the next section.

4.2.4 Supersonic Wind Tunnel Tests

1.1.1

It is proposed to re-test the three supersonic models already tested at M. I. T. with suitable improvements, as follows:



4.2.4.1 Air Intake Pressure Recovery Model

It is proposed to re-test the 1/12.5 scale reflection plane pressure recovery model at the M. I. T. with alternative improved designs of air entry. The objectives are to improve the boundary layer bleed by undercutting the ramp and to alter the design of entry lip and diffuser to prevent separation inside the intake. Tests will be carried out to attempt to determine the relative merits of external or external-internal oblique shock configurations, (the latter being defined as having one or more oblique shocks both

DECLASSIFIED

SECRET

DECLASSIFIED

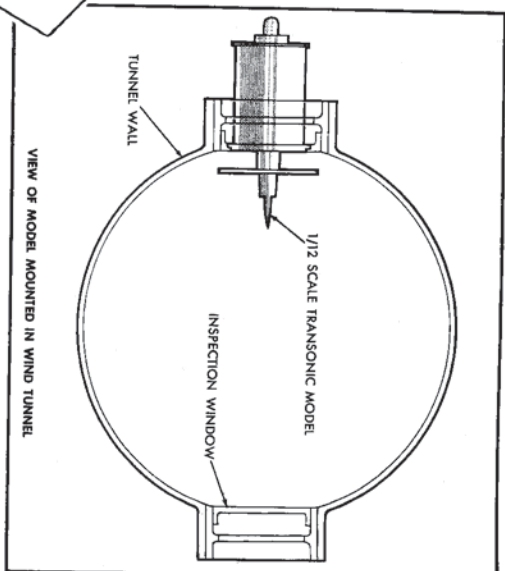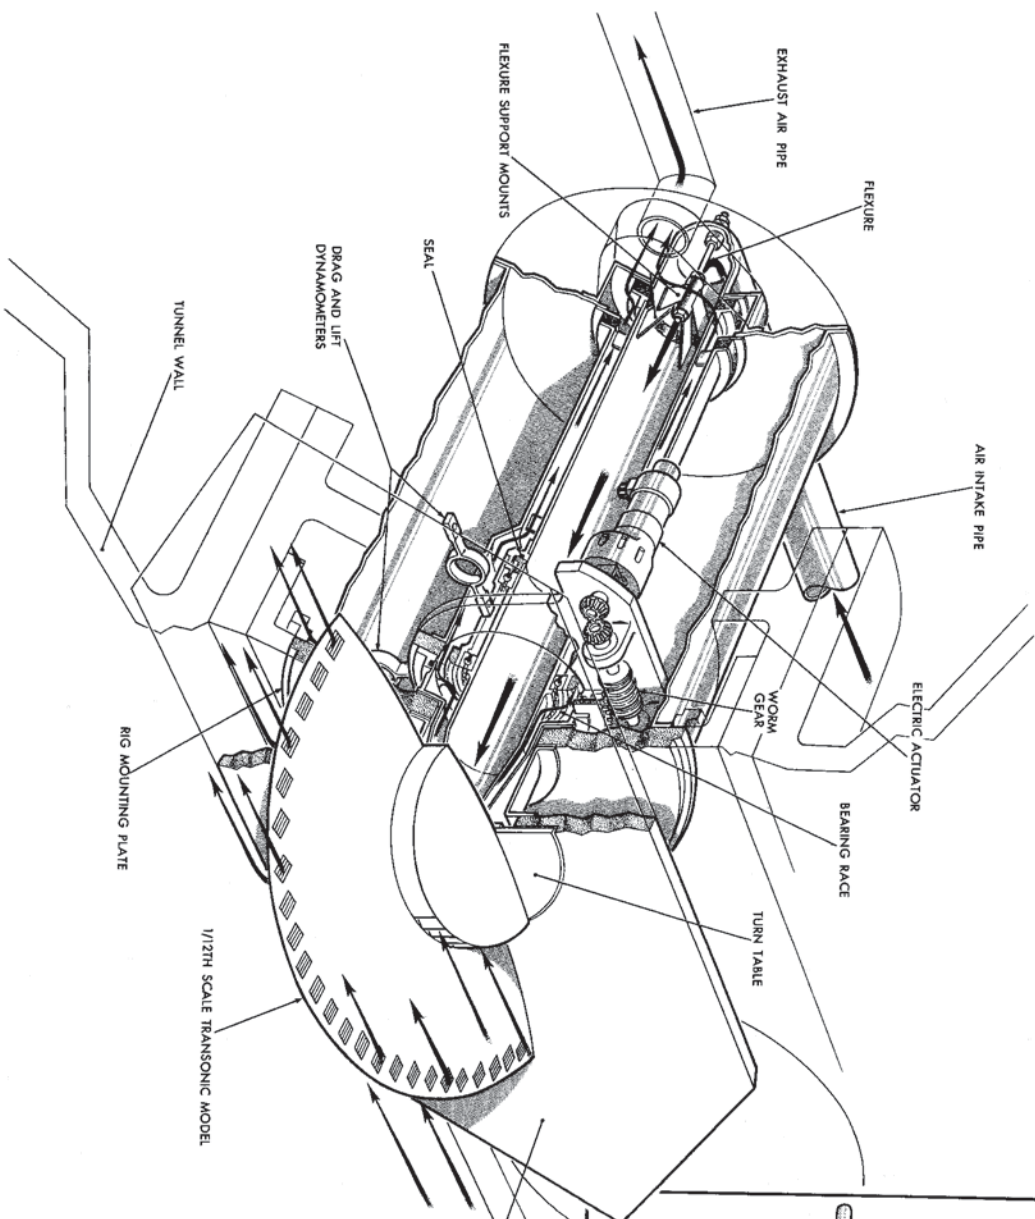

VIEW OF MODEL MOUNTED IN WIND TUNNEL.

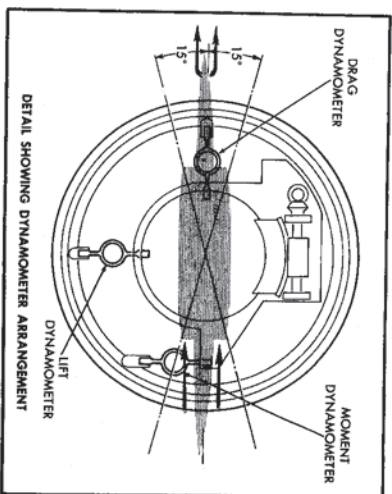


FIG. 14 PROPOSED 1/12TH SCALE TRANSONIC REFLECTION PLANE MODEL.

4444444

DECLASSIFIED

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

outside and inside the entry lip) from the point of view of pressure recovery. Later force tests on the 1/23rd scale model will be designed to indicate the external drag associated with these alternatives.

On this model improved instrumentation will be fitted in the exhausting duct at the rear for better determination of the mass flow, and if possible, better subsonic diffusion in the transition section from the twin air-entry ducts to the rear exhausting duct will be arranged.

This model is illustrated by the photograph of Fig. 15 and the illustration of Fig. 16 while the sketch following on Fig. 17 approximately illustrates the changes that are intended.

Since this is a reflection plane model mounted in place of one of the windows through which Schlieren photographs are normally taken, it is difficult to obtain satisfactory flow visualization. Efforts will be made to improve the optical characteristics of the reflection plane such that either satisfactory visualization with shadowgraph can be obtained or, if possible, an alternative Schlieren set-up engineered.

It is intended that tests on this model should be carried out at an early stage so that the best arrangement of air entry can be incorporated as a modification to the 1/23rd scale model for later force tests.

It is estimated that a total of approximately 36 hours tunnel time ($4\frac{1}{2}$ shifts) will be required, and no installation difficulties are foreseen.

4.2.4.2 Sting Mounted Models

The 1/40th scale model already tested, is illustrated by the photographs of Fig. 18 and 19 and the drawing of Fig. 20. As can be seen from the drawing, it can be built up in sections to obtain data on components drag, and it has no flow simulation and is thus extremely simple to construct. It is proposed, therefore, to manufacture a further model or models of this type to obtain the force increments (particularly drag) arising from thickening the wing, altering the sectional shape and modifying the intake diameter.

Schlieren photography presents no difficulty on this model and if satisfactory arrangements for shock pictures cannot

DECLASSIFIED

SECRET

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

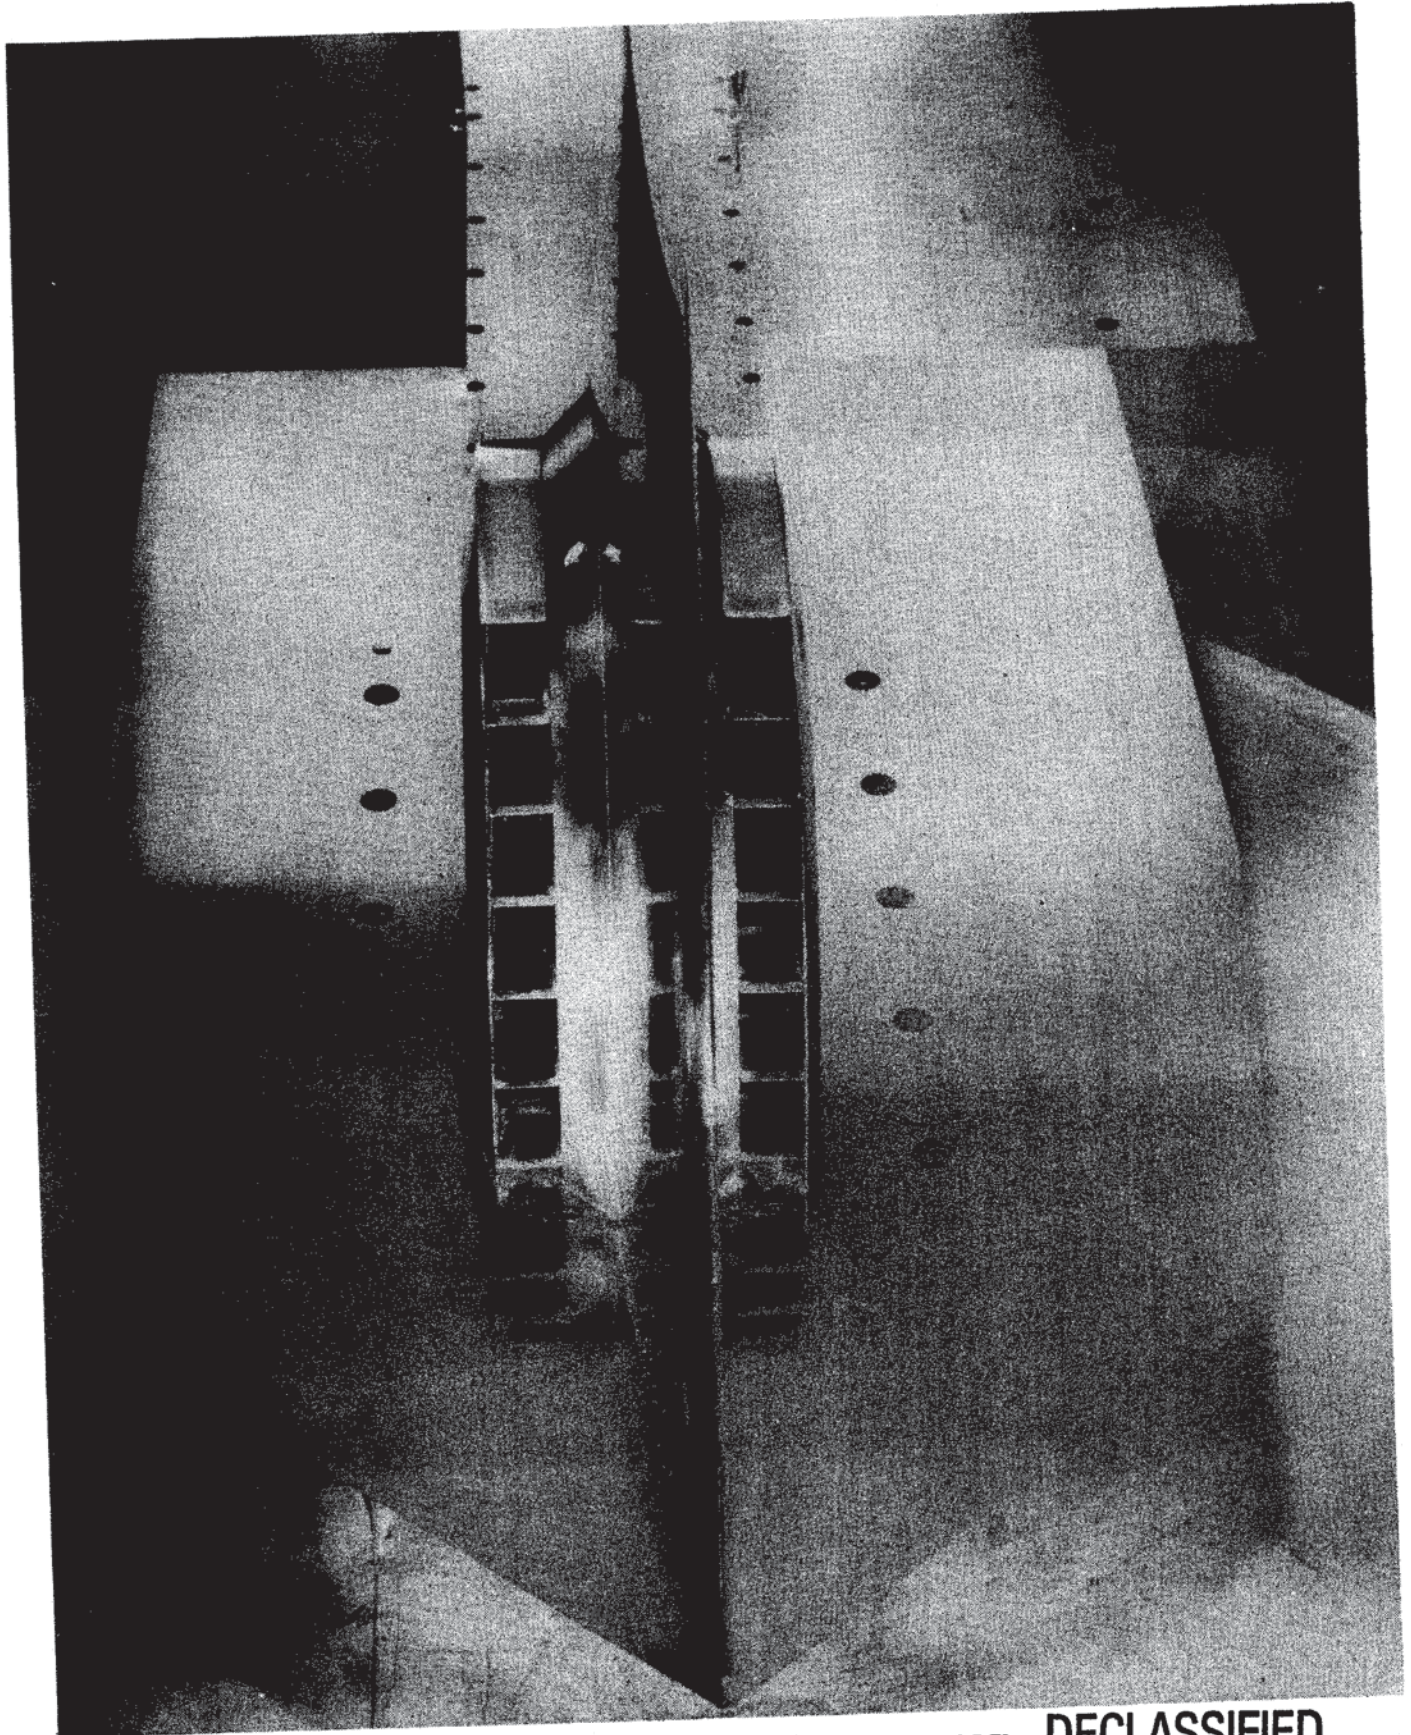


FIG. 15 2/25 SCALE AIR INTAKE MODEL

DECLASSIFIED

DECLASSIFIED

PROJECT 1794

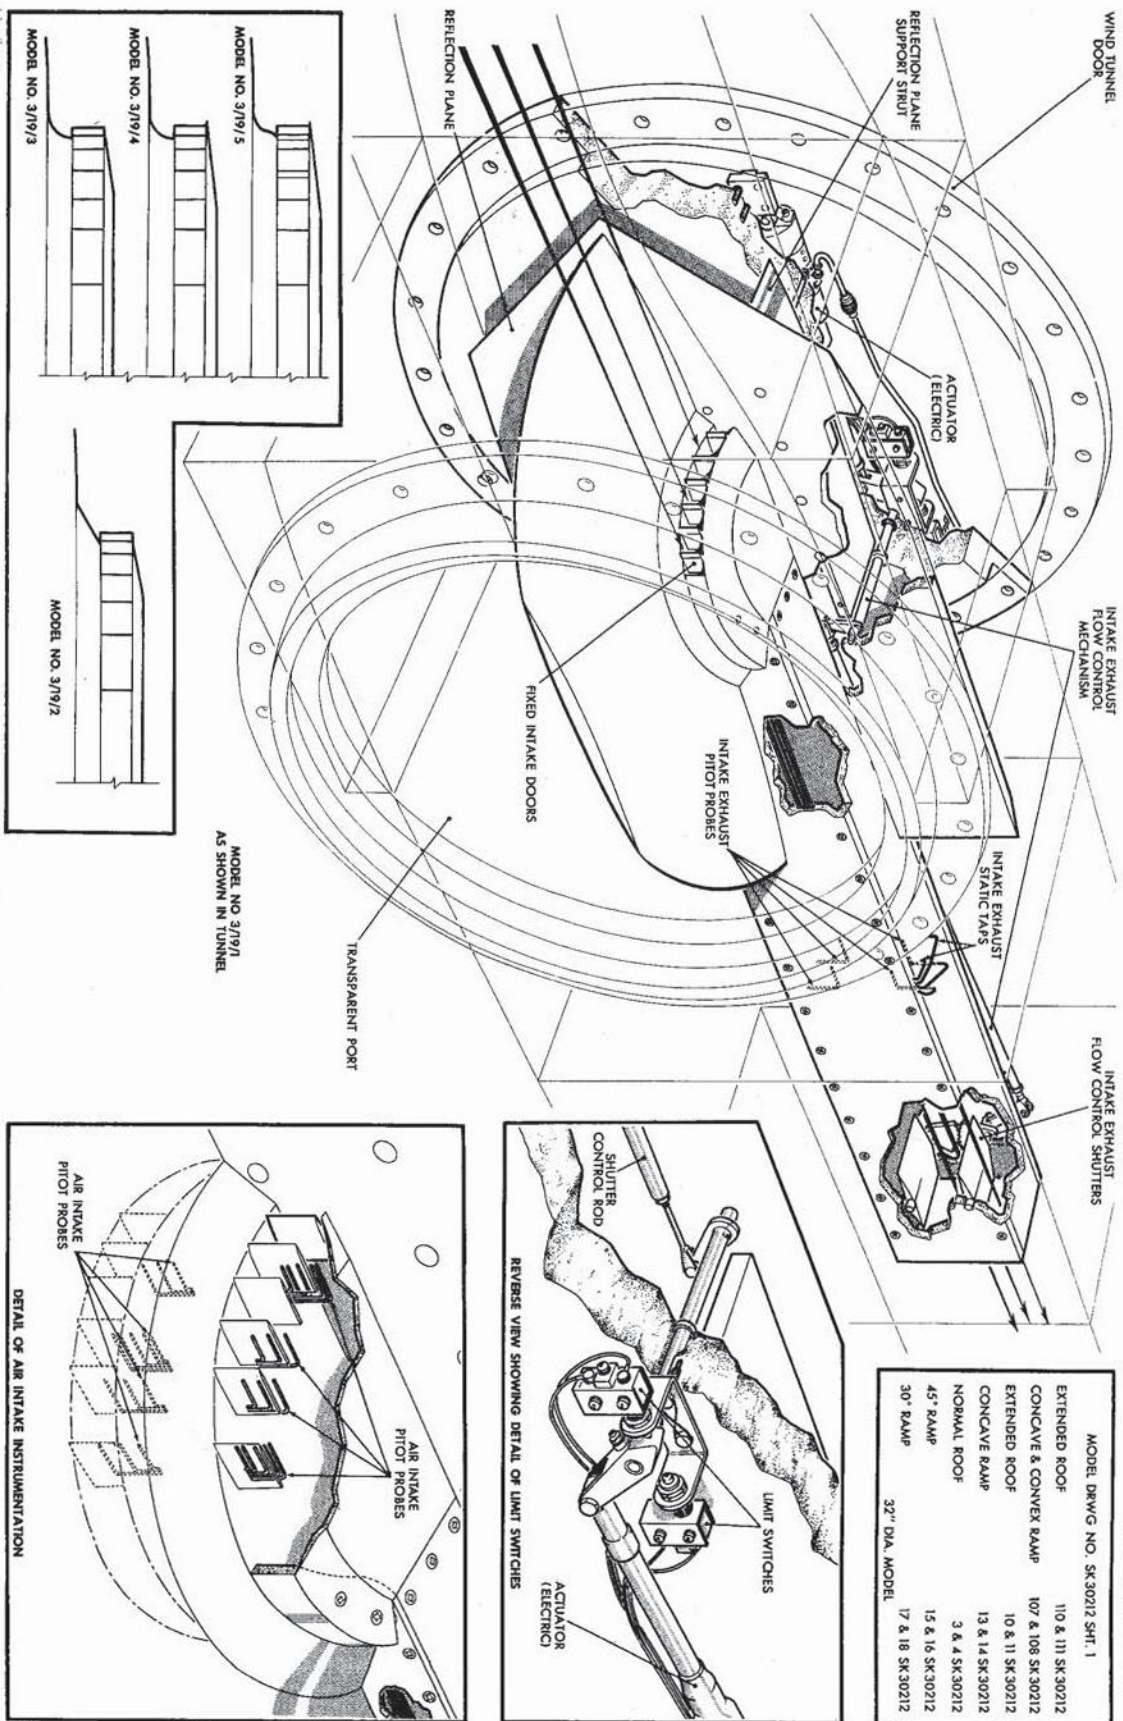



FIG. 16 2/25 SCALE AIR INTAKE MODEL

SECRET



DECLASSIFIED



2217-1794-1

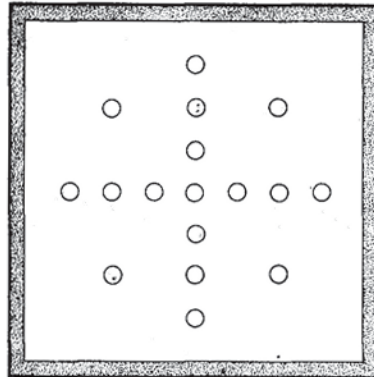

SECTION B-B
IMPROVED INSTRUMENTATION

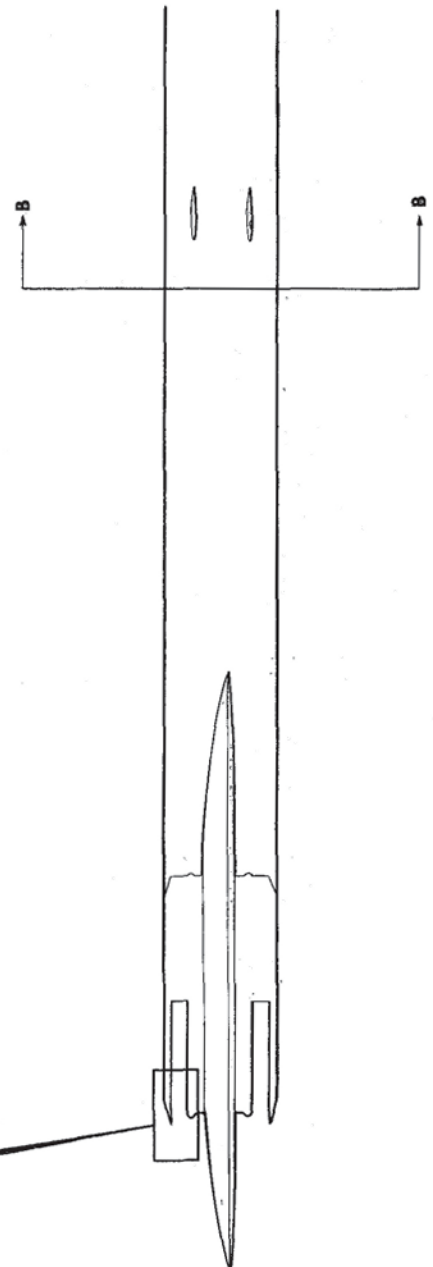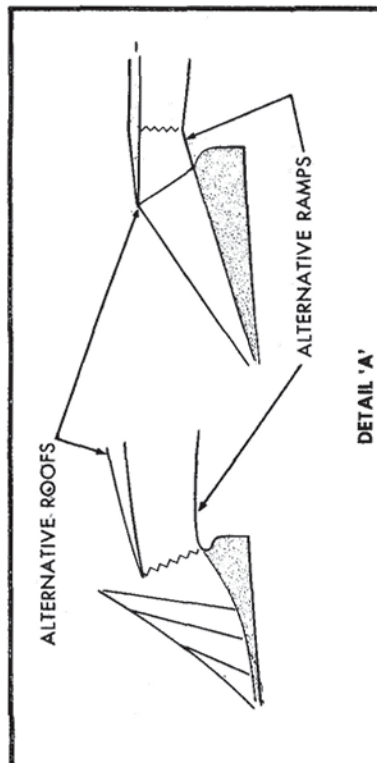

DECLASSIFIED

FIG. 17 PROPOSED CHANGES TO 2/25 SCALE MODEL

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

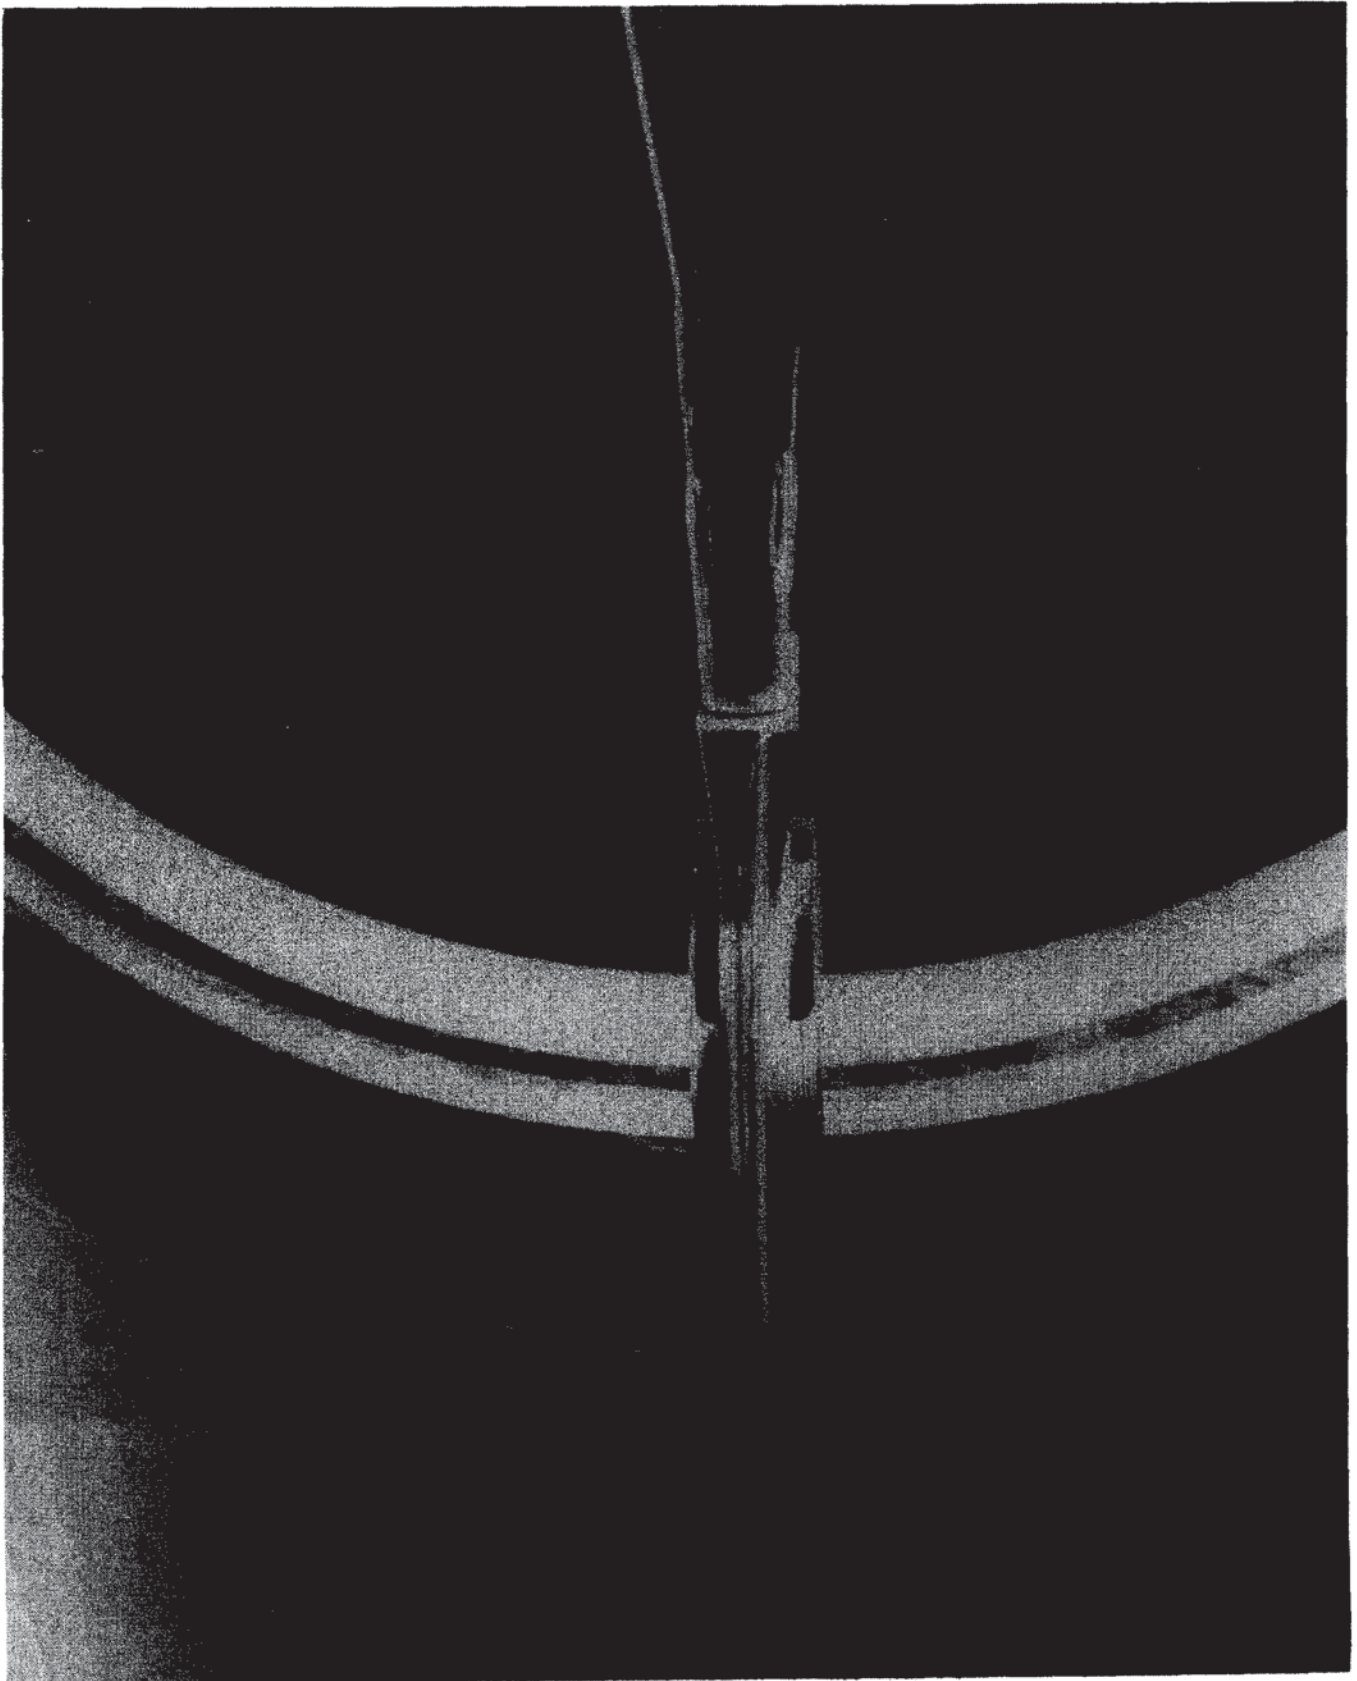


FIG. 18 1/40 SCALE STING MOUNTED MODEL

DECLASSIFIED

SECRET

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794



FIG. 19 1/40 SCALE STING MOUNTED MODEL

DECLASSIFIED

SECRET

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

1249-1794-2

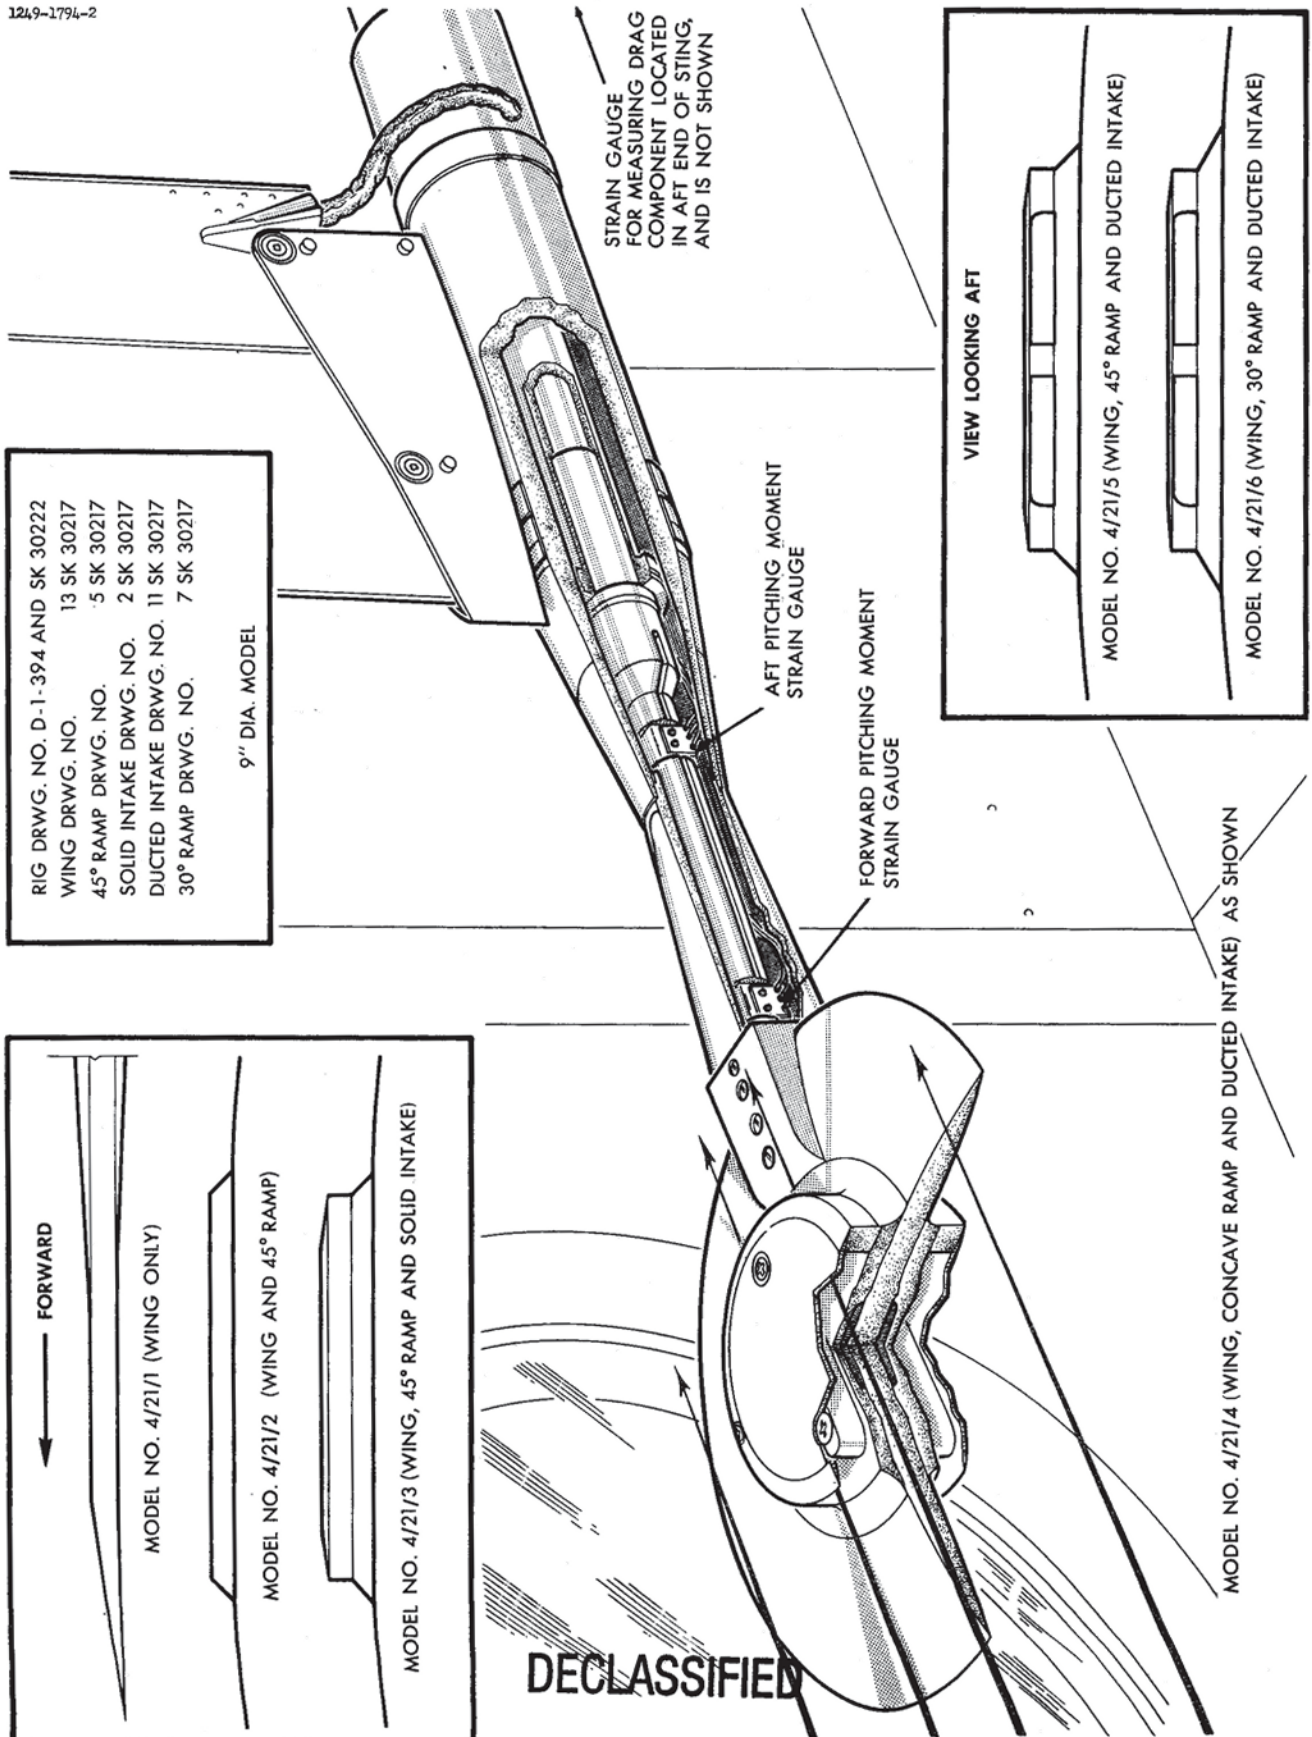


FIG. 20 1/40 SCALE STING MOUNTED MODEL

SECRET

DECLASSIFIED



PROJECT 1794

be achieved on the pressure recovery model of paragraph 4.2.4.1, selected air intake arrangements tested on this model will be reproduced on the sting mounted model.

It is also intended to carry out transonic tests on ~~these~~ models (as originally programmed for the model illustrated) to obtain force correlation (particularly drag) with the transonic model now proposed for tests with flow simulation.

A balance for this model is in existence at the M.I.T. and it is expected that it will be convenient to test both this model and the pressure recovery model during the same period. It is anticipated that a total testing time of 24 hours (3 shifts) will be required for the sting mounted models.

4.2.4.3 Force Model with Flow Simulation

It is proposed to re-introduce the 1/23rd scale reflection plane force model with flow simulation into the supersonic tunnel at the Massachusetts Institute of Technology. The previous tests with this model were limited by the time available to an abbreviated program, and hampered by the lack of sufficient intake flow for proper simulation and by some instability in the model intake circuit. The latter will be corrected and it is believed that the full mass flow can now be drawn through the air intake without difficulty by using the new suction pump capacity recently installed at the M.I.T. instead of, as before, feeding the air intake flow back into the wind tunnel downstream of the working section. The existing model and balance system is shown in the photograph of Fig. 21 and the schematic perspective of Fig. 22.

It is proposed to extend the scope of the future series by allowing for a greater Mach No. coverage to include up to Mach 4.

Momentum drag and thrust polars will be taken more often and over a greater range than before. As explained in paragraph 4.2.4.1, the air entry will be re-designed to correspond to the best obtained from the pressure recovery model.

It is hoped that the so-called air bearings can be eliminated from this balance also, which will allow the measuring accuracy of the instrumentation for air flow measurement to be vastly improved. Proposed changes to the model are illustrated by the sketches on Fig. 23.

DECLASSIFIED

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

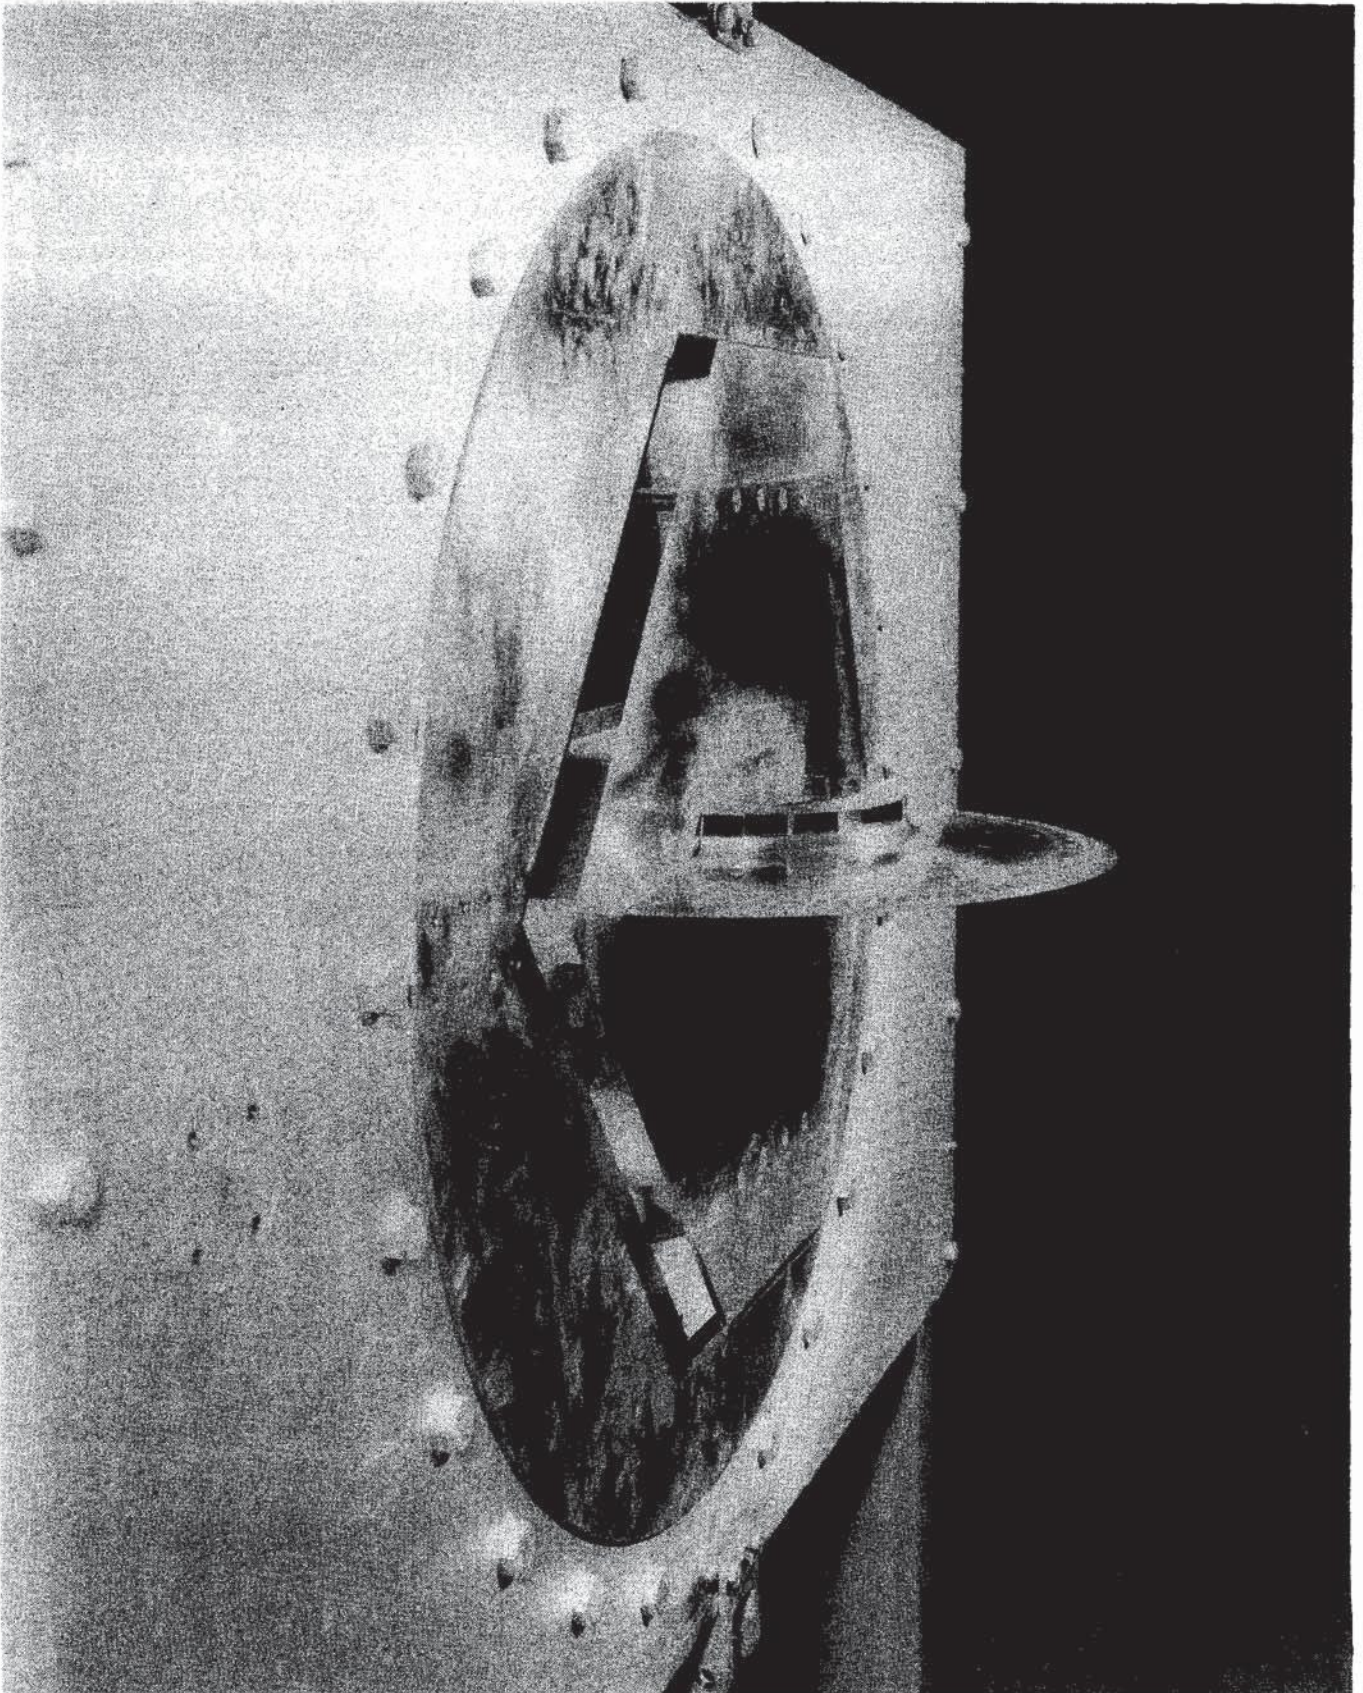


FIG. 21 1/23 SCALE SUPERSONIC MODEL

DECLASSIFIED

SECRET

DECLASSIFIED

304-1794-2

EXHAUST NOZZLE AIR SUPPLY LINE

SAFETY COCK

AIR BEARING

INTAKE AIR EVACUATION LINE

FLOATING PLATE

WIND TUNNEL DOOR

MAGNETIC POSITION TRANSMITTER
(ANGLE OF ATTACK INDICATION)

TURN TABLE SUPPORT ROLLER BEARINGS

TURN TABLE

EXHAUST AIR PLENUM CHAMBER

BALANCE HOUSING

EXHAUST AIR STATIC PROBE

EXHAUST AIR PITOT PROBES (4)

INTAKE AIR STATIC PROBE (4)

INTAKE AIR PITOT PROBES (4)

ACTUATOR (ELECTRIC)

GEAR

FLEXIBLE SUPPORT COLUMN (4)

WIND TUNNEL WALL STATIC TAP

INTAKE AIR GUIDE VANES

REFLECTION PLANE

EXHAUST AIR GUIDE VANES

REMOVABLE TIP

MODEL NO. 21201A.C.

EXHAUST NOZZLES

AIR INTAKE PITOT PROBES
MODEL NO. 21201A.C.

TRANSPARENT PORT

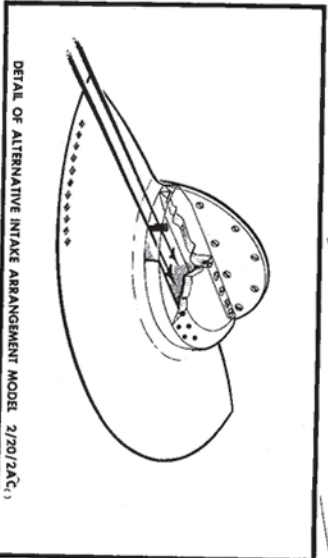


FIG. 22 1/23 SCALE SUPERSONIC MODEL

SECRET




DECLASSIFIED

PROJECT 1794

RIG DRWG. NO. SK.30213
MODEL DRWG. NO. SK.30195 SHF 5
17.4" DIA. MODEL

NOTE:

FOR TEST RUNS AT MACH 3 REFLECTION PLANE TIPS REMOVED. CONFIGURATION LETTER 'A' BECOMES 'B'. TO DESIGNATE CLIPPED REFLECTION PLANE CONDITION FOR SUFFIX TO 'C' REFER TO TABLE OF THRUST CONFIGURATIONS.

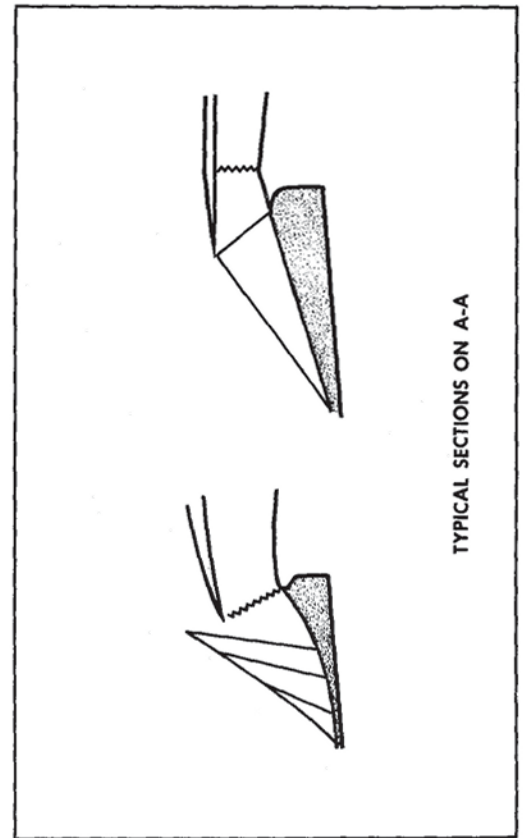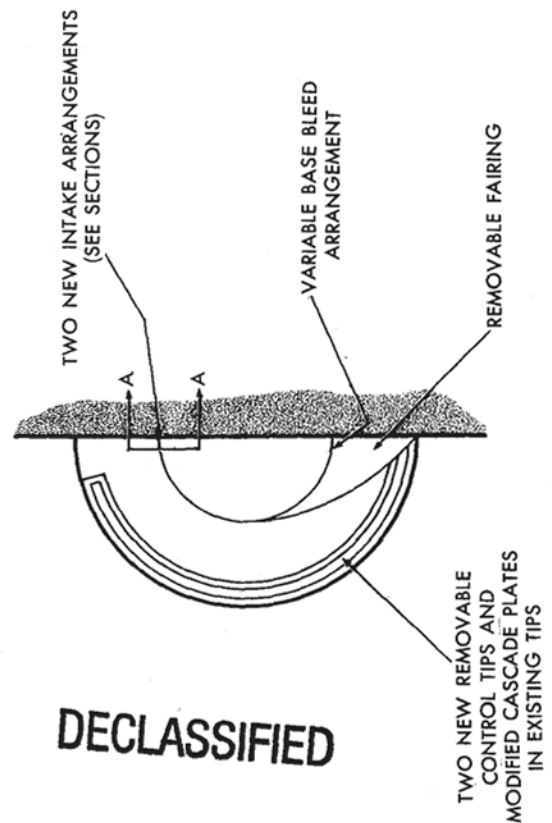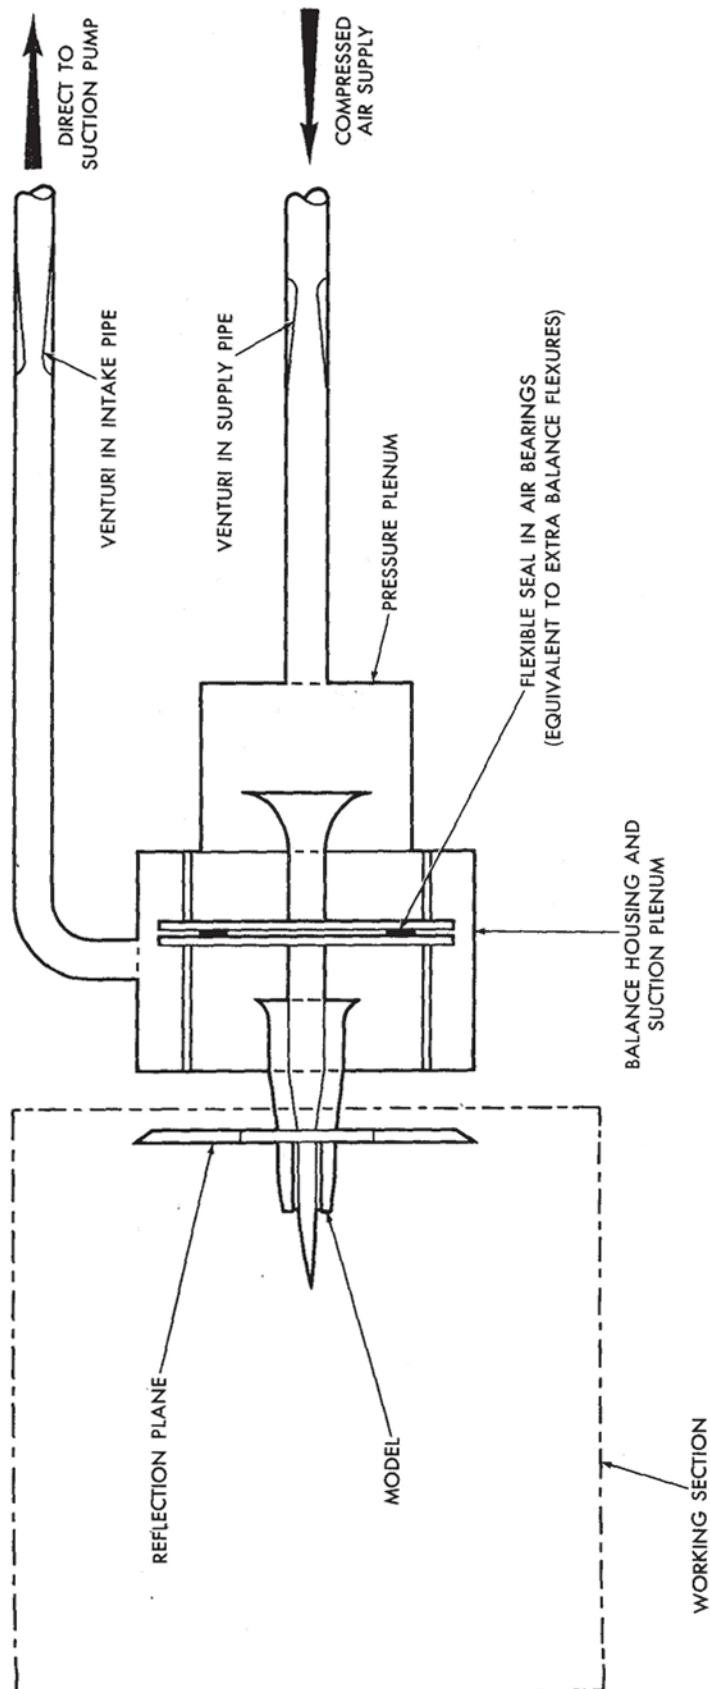

2218-1794-1

FIG. 23 PROPOSED CHANGES TO 1/23 SCALE MODEL

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

Statement
of Work
Sub Parts

It is anticipated that approximately 60 hours tunnel time ($7\frac{1}{2}$ shifts) will be required for a new program on this model.

4.3 Static Tests

1.1.5.1
1.1.5.4

Certain static tests are being carried out as part of the Avro Aircraft Limited P.V.704 program and will be reported to USAF, as follows:

4.3.1 1/3rd Scale Nozzle Development Tests

Nozzle development tests at 1/3rd scale are being carried out on the balance rig shown in the photograph Fig. 24 and the illustration Fig. 25 on the following page. The objectives are to determine the pressure losses in the outer wing combustion section and in the nozzle itself and the effective outlet area of the nozzles at various angular settings and in various positions about the wing periphery. Thrust losses are being obtained directly from this rig and converted to pressure losses for thrust estimation.

As will be seen from the illustration, the rig consists of a two component strain gauge balance, having a long flexible air supply pipe with a Venturi inside it, encastered at one end into the main air supply and supported at the other by the balance dynamometers. Cascades in the right angle elbow and a gauze downstream ensure an even flow distribution to the outer wing 1/3rd scale segment. Standard round nozzles have been used to provide a calibration for a reference pressure plane sufficiently upstream of the combustion region entry to be unaffected by flow changes in this region.


Various types of shutter in combination with flame tube proposals will be tested in this rig, until satisfactory nozzle performance is established.

It is anticipated that in due course, pressure instrumentation will be added at the nozzle exit to enable detail improvements to the nozzle flow to be carried out. If at all possible a third component may be added to the balance to enable thrust efficiency measurements to be made for any nozzle around the periphery. Results of these tests will include data on thrust efficiency, discharge coefficient and efflux angle.

DECLASSIFIED

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

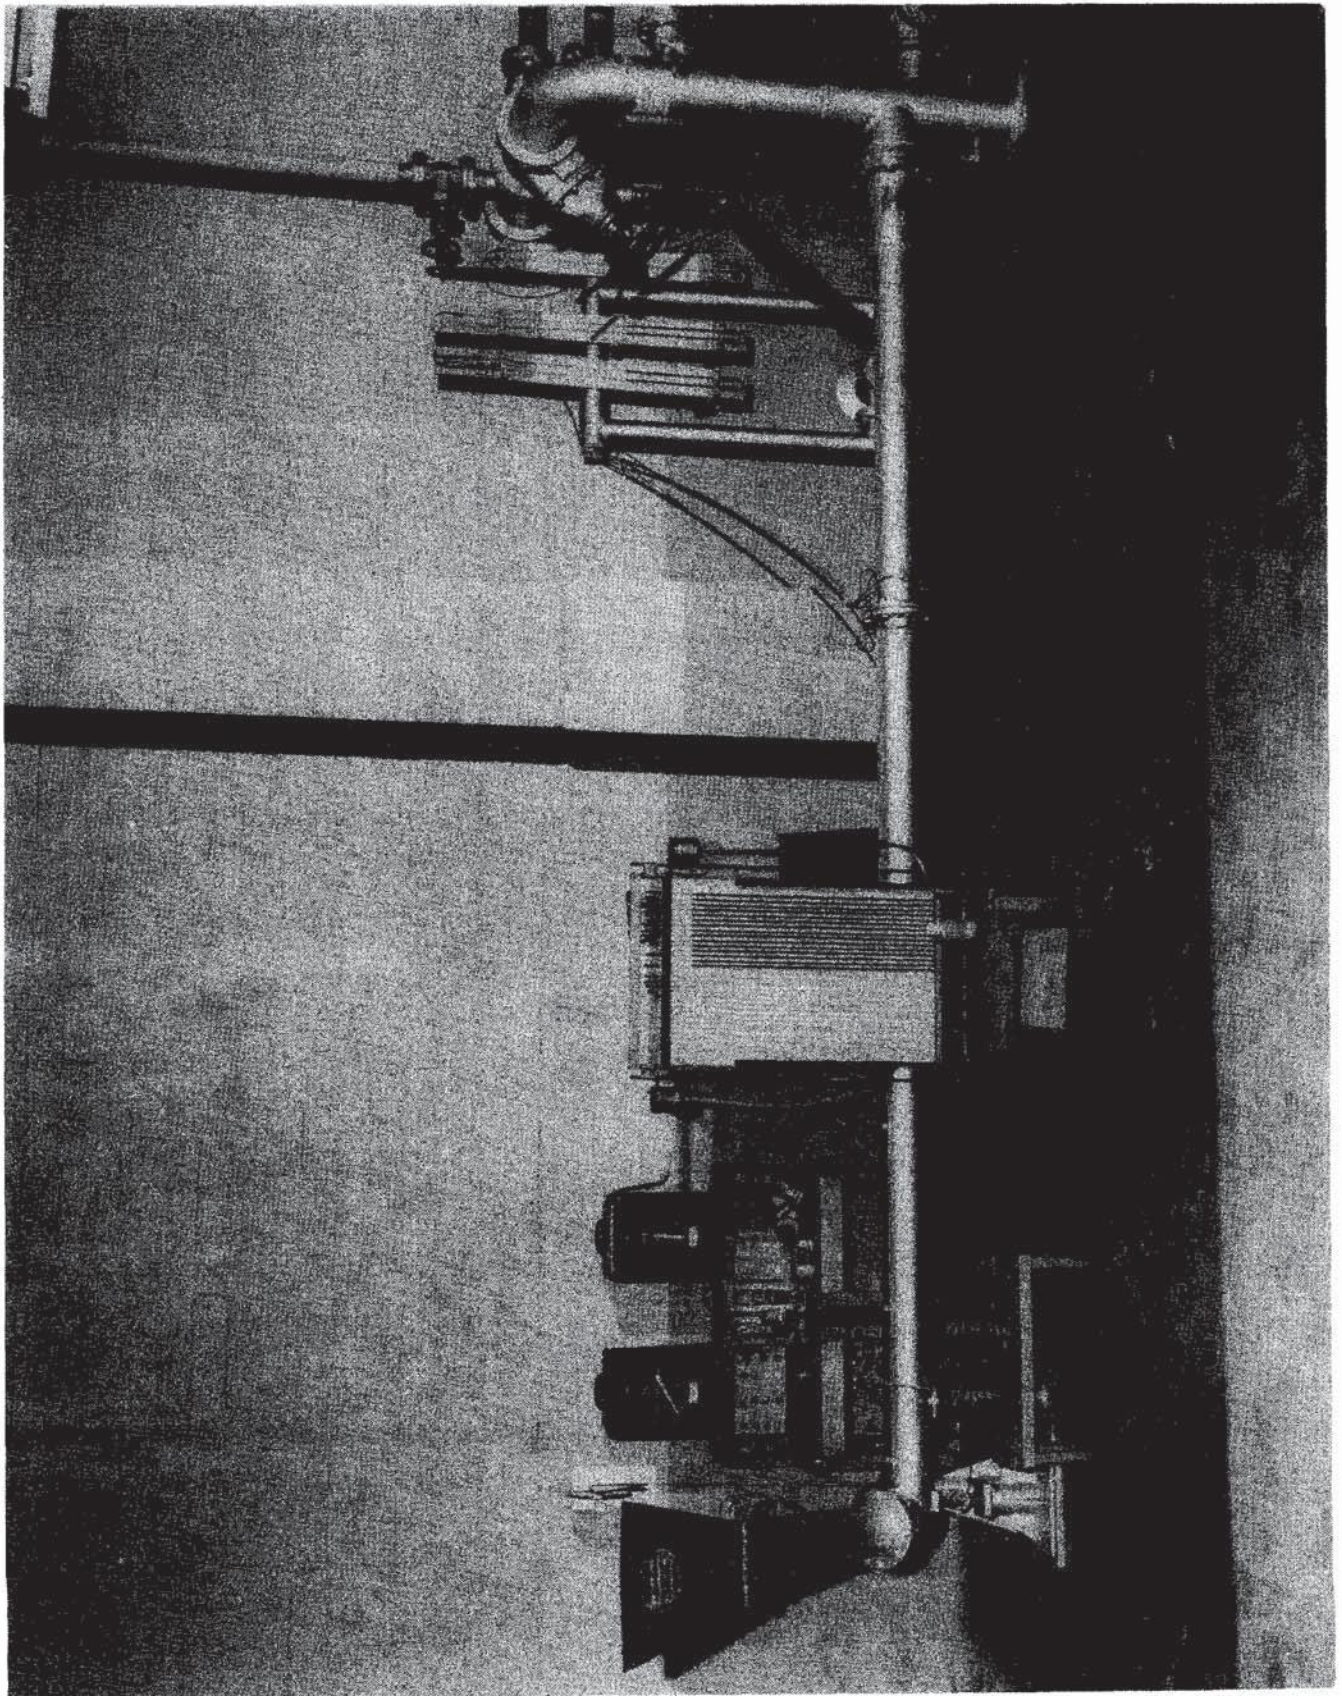


FIG. 24 1/3 SCALE NOZZLE RIG

DECLASSIFIED

SECRET



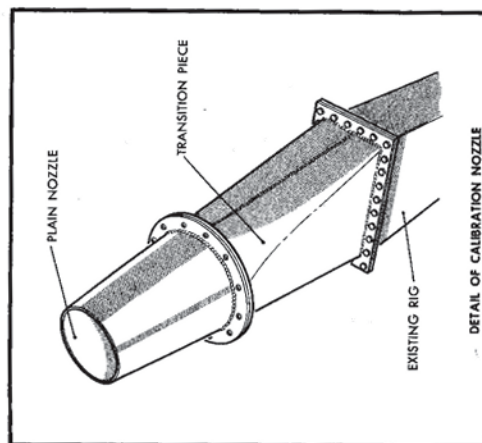


FIG. 25 1/3 SCALE OUTER WING SEGMENT TEST RIG

SECRET

DECLASSIFIED

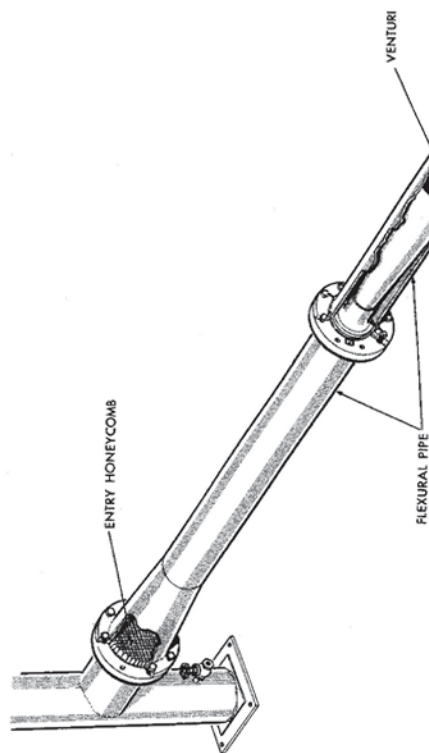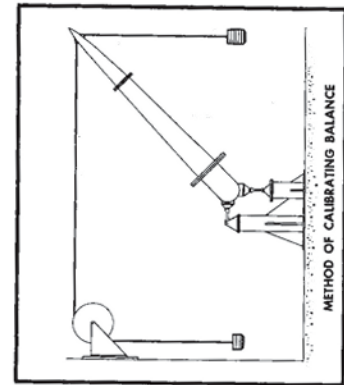

4.3.2 1/5th Scale Air Intake Tests

It is proposed to carry out development tests of the internal flow in the air intake (between the mouth and the eye of the impeller), at 1/5th scale on a static rig as illustrated in Fig. 26. A schematic of the intended internal flow is also shown in Fig. 27.

A parallel stream of air is fed to the intake mouth by means of an entry flare and sucked through the internal passages and a transition section by means of an annular ejector (actually part of the 18" x 18" ejector wind tunnel at Avro). Alternatively, at a later stage, the entry flare will be removed and the take-off relief doors now envisaged (as shown in Fig. 27) will be fitted in the roof of the intake, to simulate the take-off case. Thus the two important cases for the internal flow in the air intake can be simulated.

The first series of tests will comprise tuft studies through the transparent intake roof, plus measurements of the yaw angle and vertical pressure profile from the elementary instrumentation illustrated. An approximate measurement of the mass flow will be obtained from a total pressure survey across the circular duct leading to the ejector and wall static pressures. Following this more complete instrumentation will be fitted and thorough total and static pressure surveys will be taken at the compressor entry station, giving the pressure loss to this point and accurate mass flow measurement.

Revised

4.3.3 Ground Effects Tests

It is proposed to continue testing on the 1/20th scale ground effect rig illustrated by photograph of Fig. 28 and the schematic perspective of Fig. 29. The balance will be improved, the undersurface configuration brought up to date, and the internal arrangements changed to ensure a completely even distribution of the flow from the peripheral jets.

It is also proposed to determine, by mounting the ground on a three component balance, whether the moments on the ground reflect those on the model, in which case a hovering mechanical analogue is visualized as discussed under stability and control in Section 6.

4.4 Work Chart Scheduling and Cost

Fig. 30 is a work chart illustrating the interdependence of

DECLASSIFIED



AVRO AIRCRAFT LIMITED

PROJECT 1794

the items under this head, Fig. 31 shows a proposed schedule. Cost and manhours estimates are shown on pages 95 - 108. Wind tunnel occupancy time is assumed at no cost to the contractor. The schedule is of course tentative since it depends on the availability of tunnel time.

DECLASSIFIED

~~SECRET~~

DECLASSIFIED

2004-1794-1

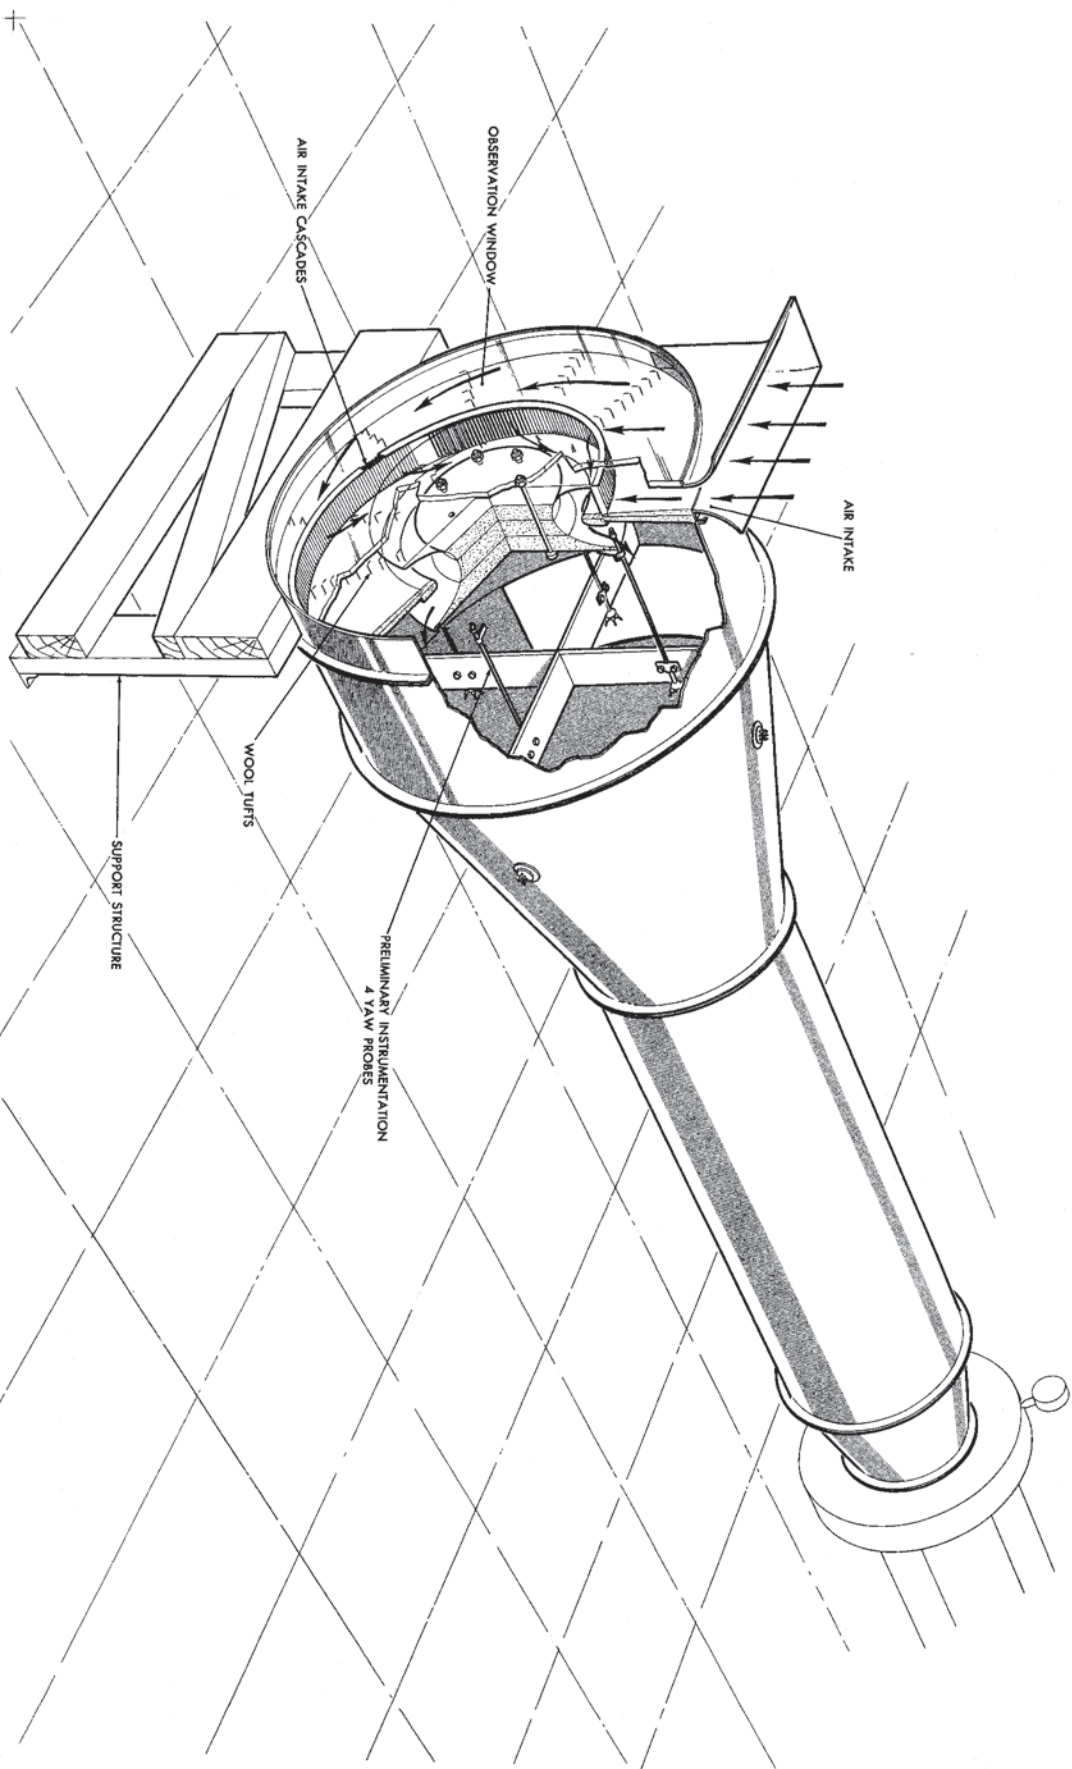


FIG. 26 1/5th SCALE AIR INTAKE MODEL

SECRET

DECLASSIFIED


DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

2049-1794-2

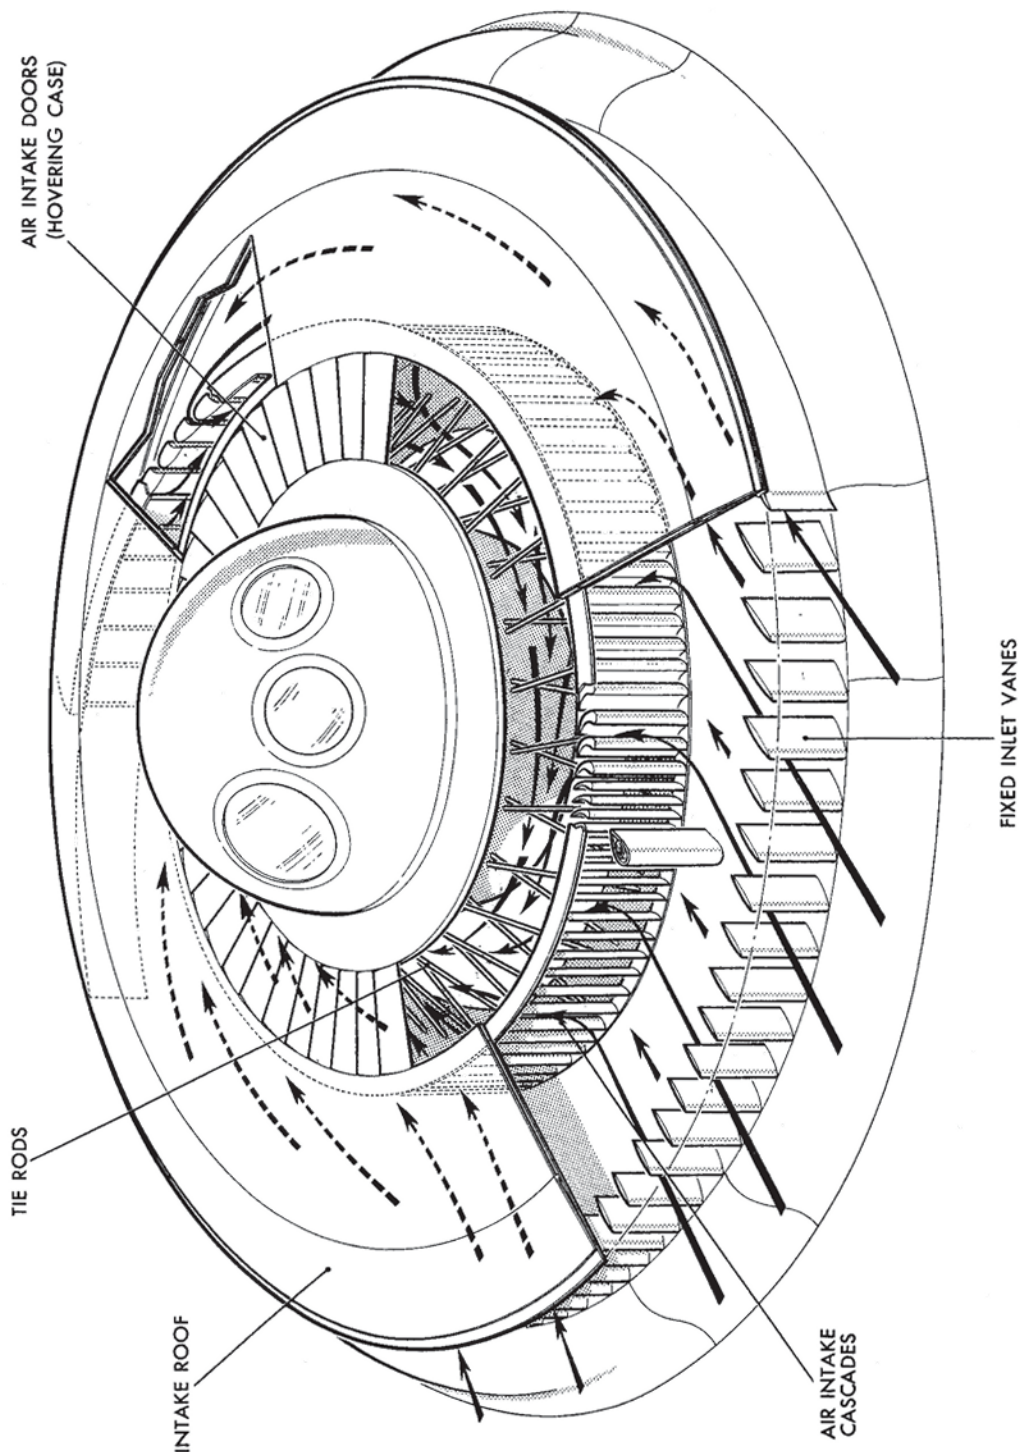

DECLASSIFIED

FIG. 27 INTAKE ARRANGEMENT

SECRET

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

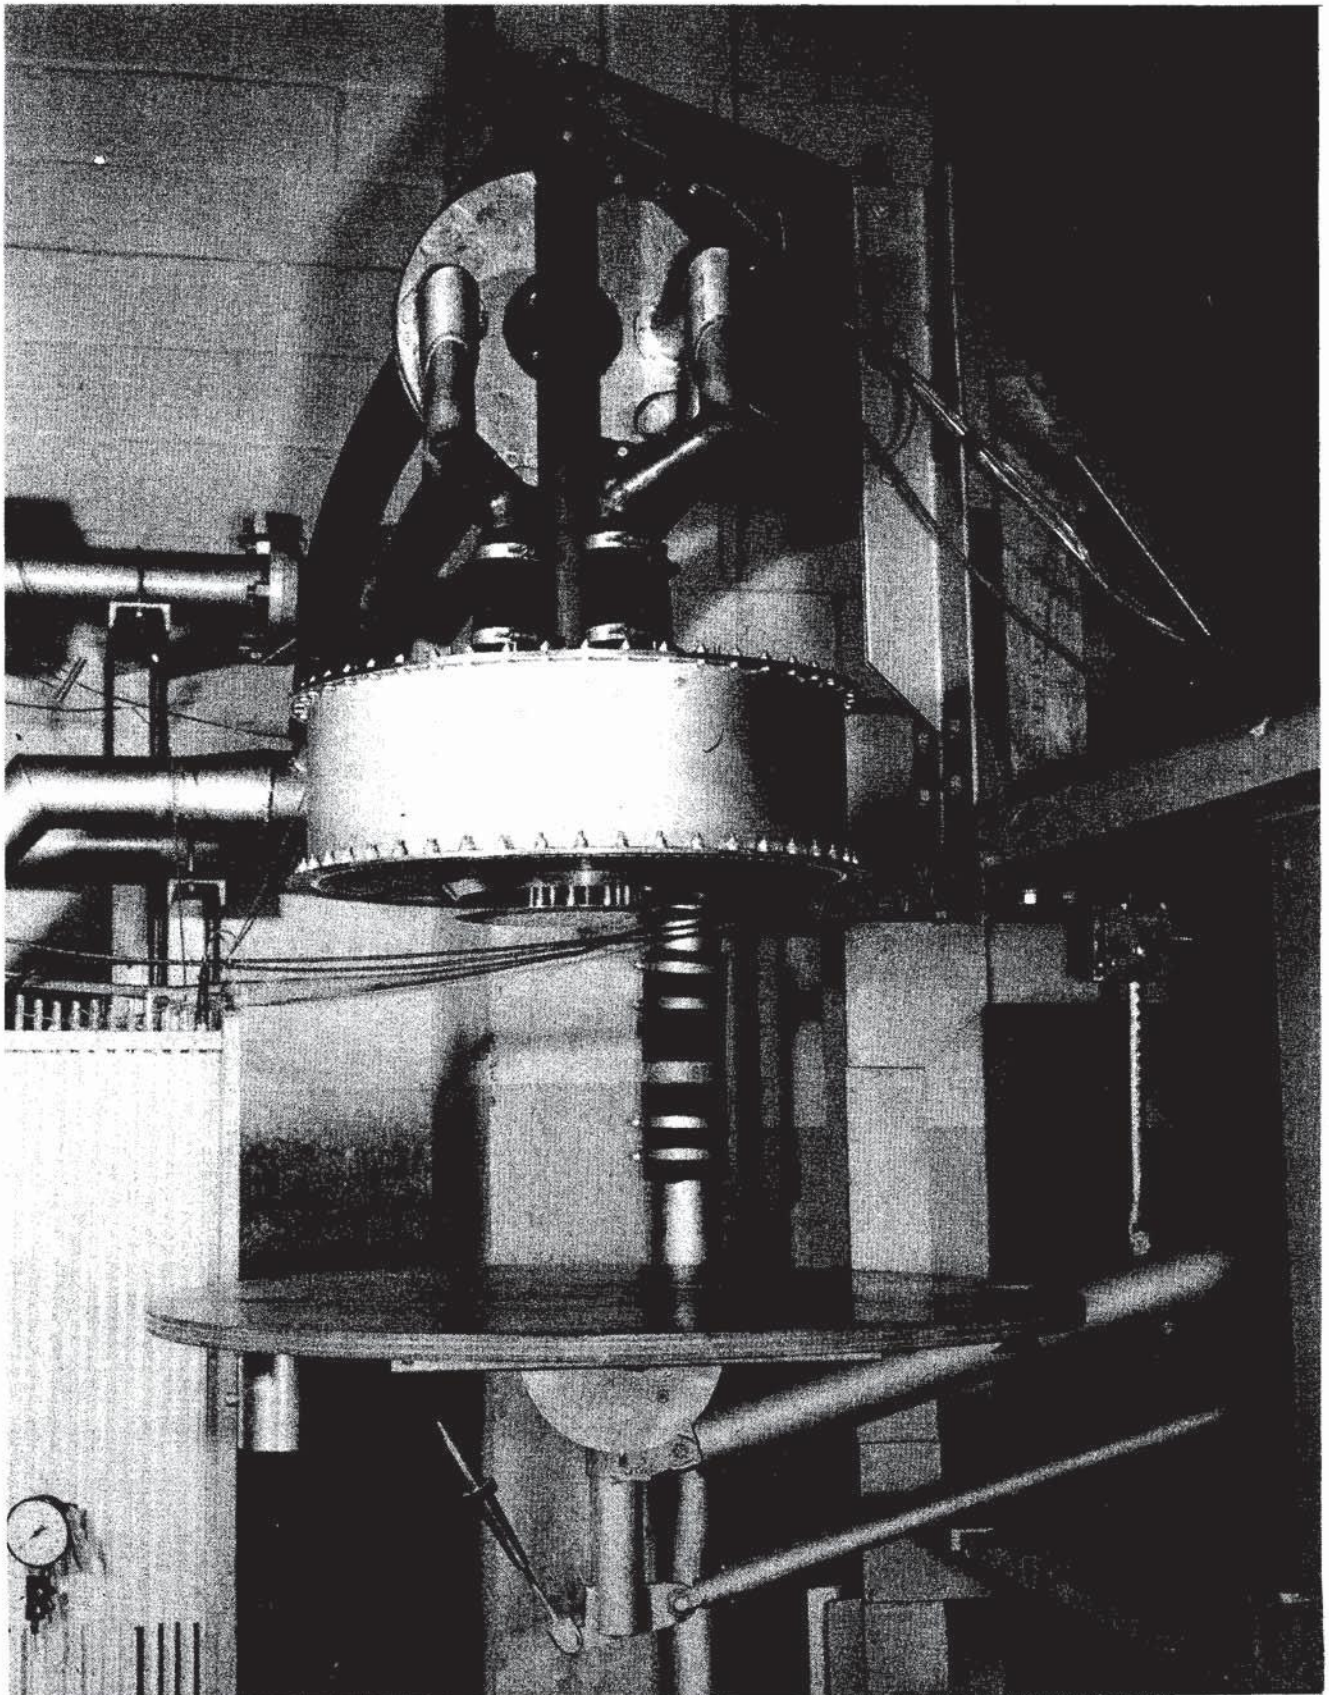


FIG. 28 GROUND EFFECTS RIG

DECLASSIFIED

SECRET


DECLASSIFIED



PROJECT 1794

RIG DRWG. NO. SK 21295 SHT. 1
MODEL DRWG. NO. 17 SK 30226
27 SK 30038
20" DIA. MODEL


344-1794-2



DETAIL OF MODEL NO. 1/9/133358514

NOTE

1. THIS IS SHEET NO. 5 FOR OTHER ILLUSTRATIONS REFER TO SHEETS NO. 1, 2, 3, ETC.
FOR OTHER CONFIGURATIONS REFER TO TABLE
2. FOR PYLON PILOT REFERENCE PROBE AND TAP, AND ALSO THE ARTIFICIAL GROUND
REFER TO ILLUSTRATION OF RIG

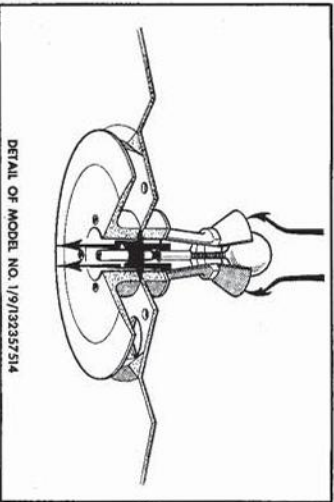

DETAIL OF MODEL NO. 1/9/133357514

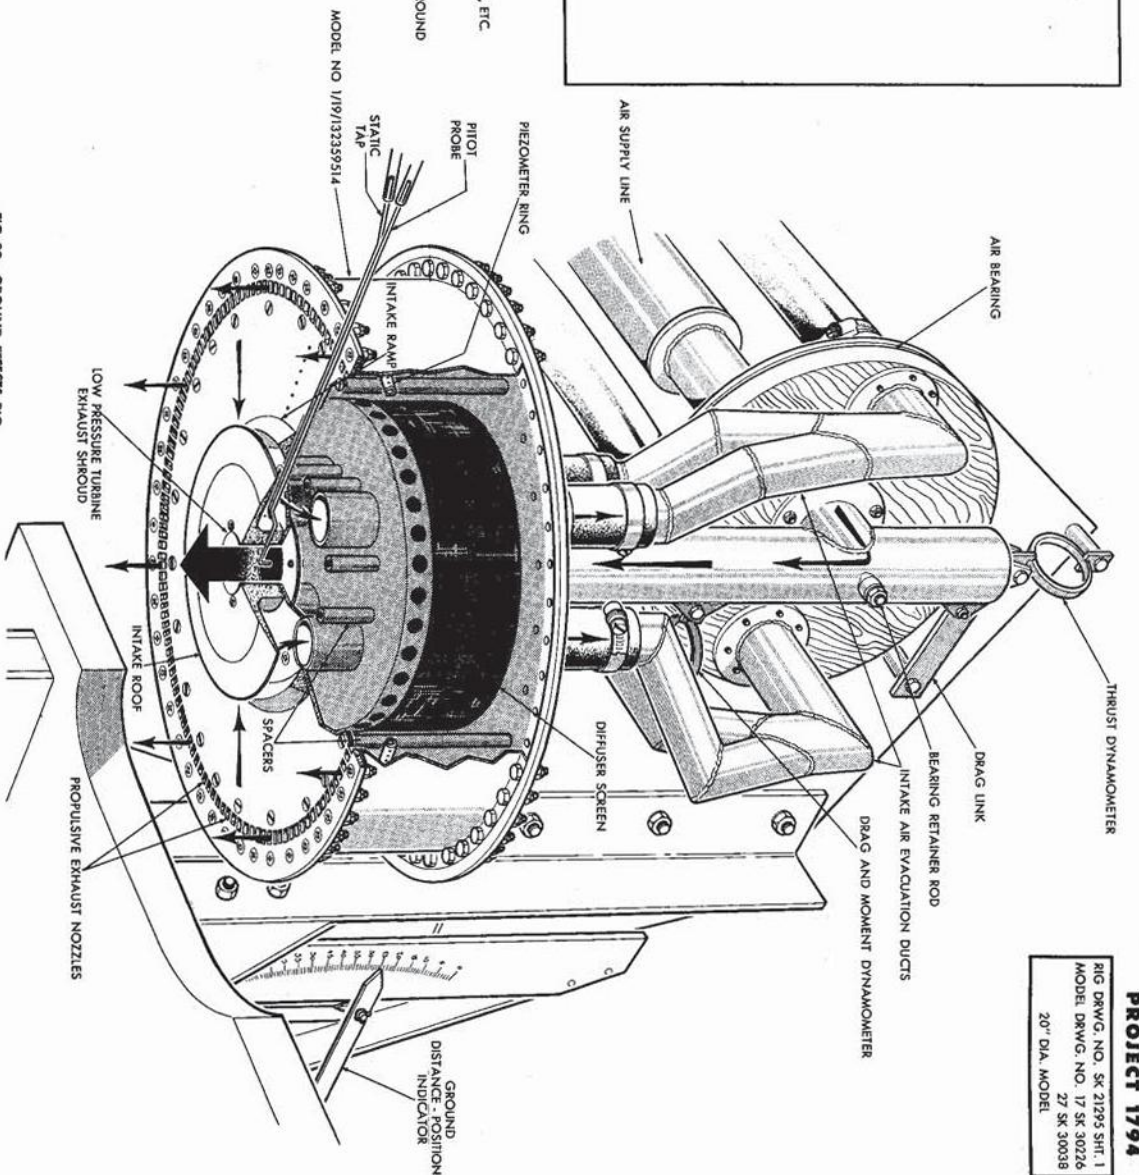


FIG. 29 GROUND EFFECTS RIG

SECRET

DECLASSIFIED

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

2116-1794-2

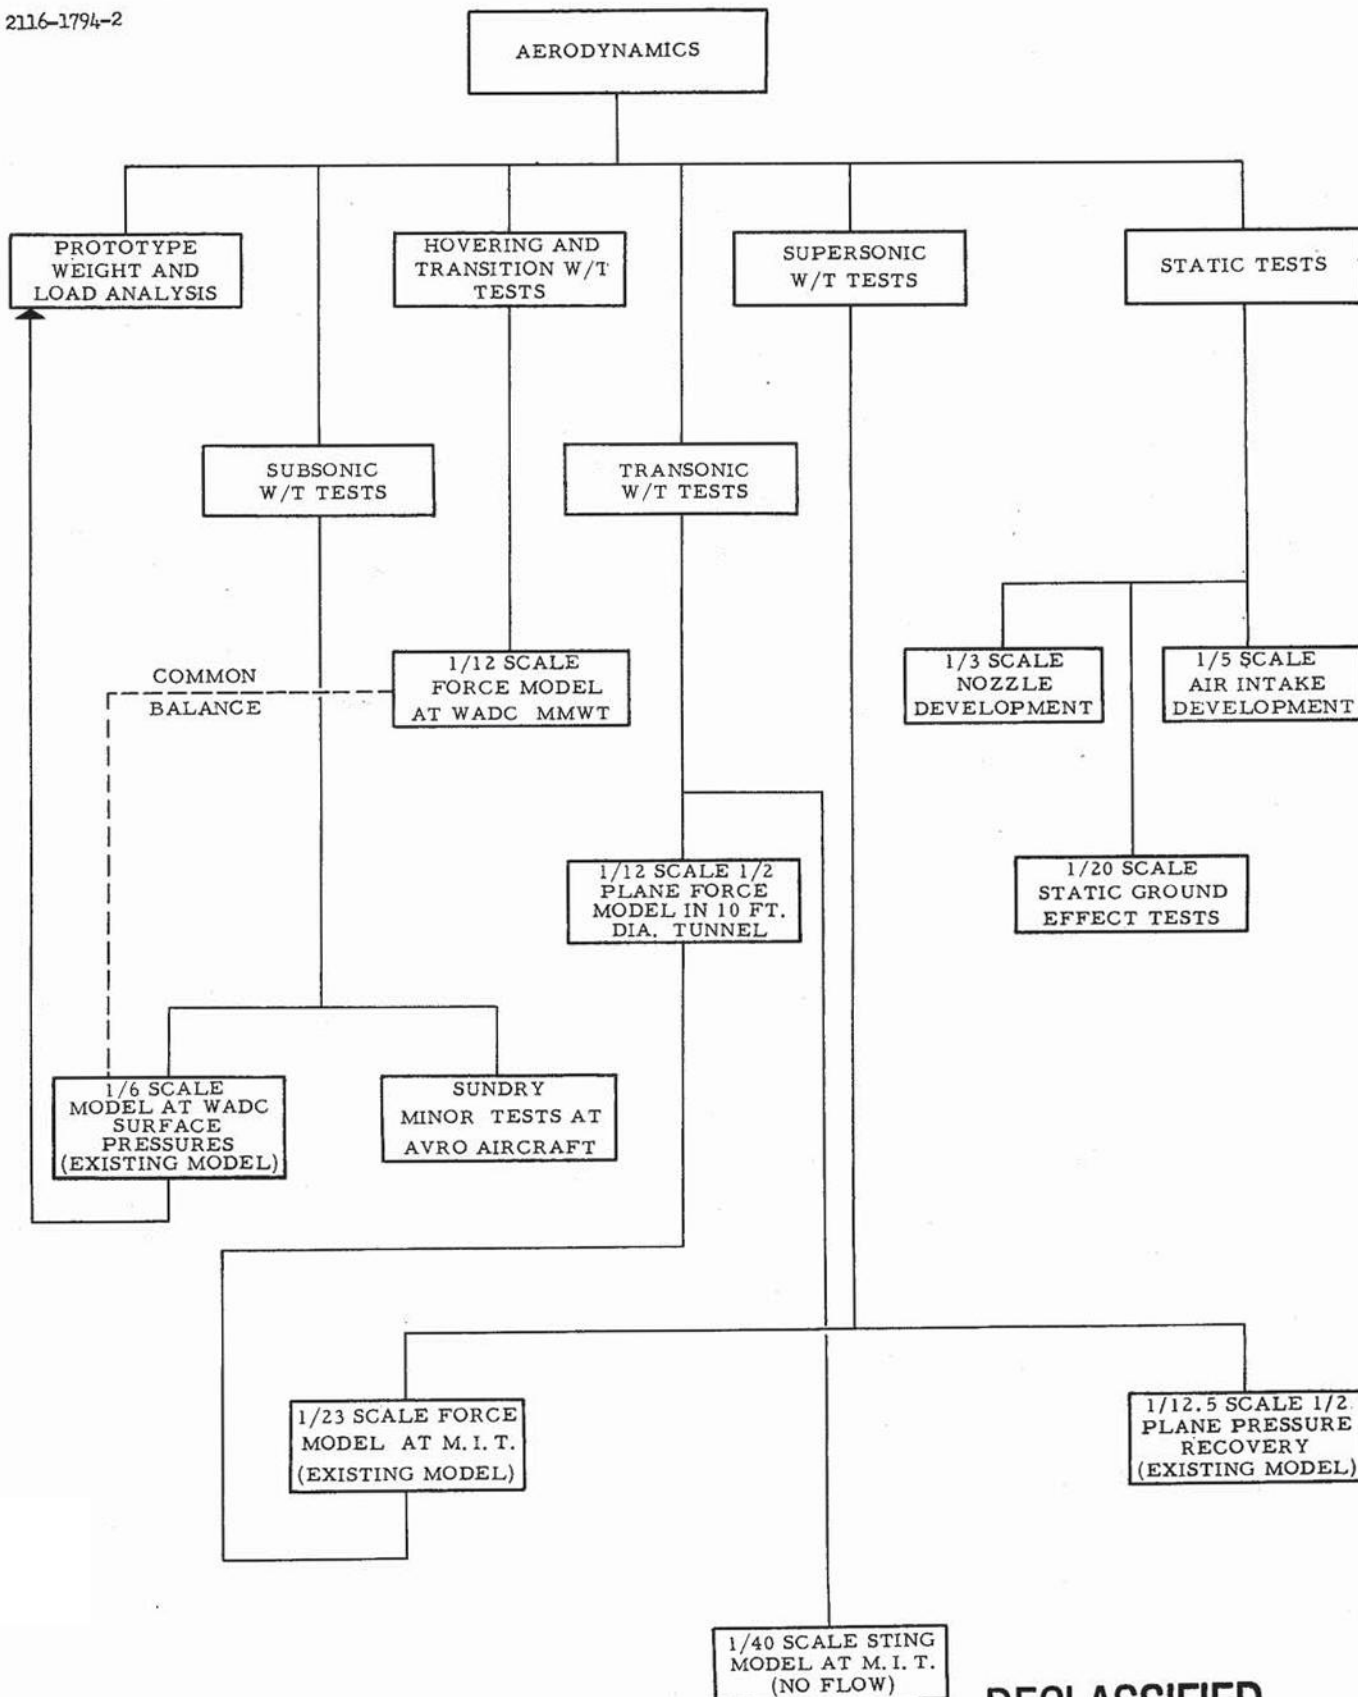


FIG. 30 WORK CHART - AERODYNAMICS

DECLASSIFIED

DECLASSIFIED

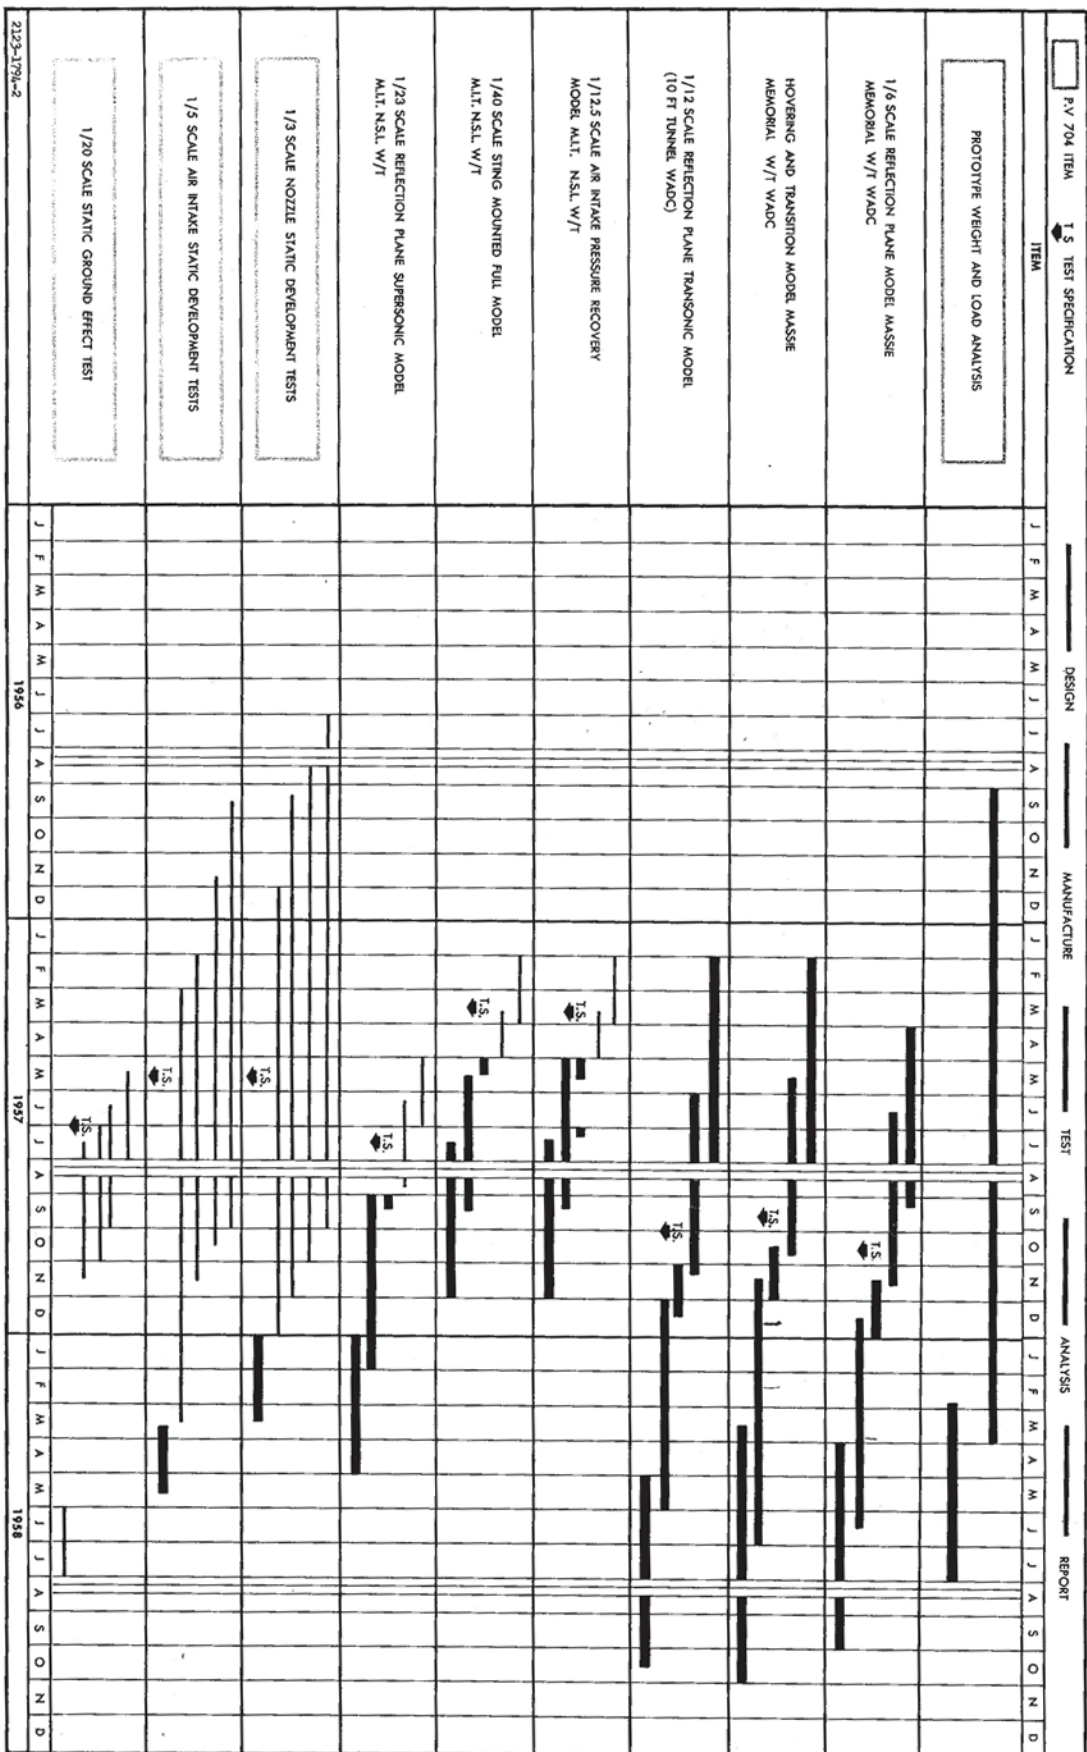


FIG. 31 WORK SCHEDULE CHART - AERODYNAMICS

SECRET

DECLASSIFIED

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

Statement
of Work
Sub Parts

5. PROPULSION

Present policy is to carry out development of the propulsion system on a complete engine, comprising the six Viper gas generators and the main eight foot diameter radial flow turbine compressor pair, but without the afterburners and nozzles fitted. This six Viper rig involves the building of the basic structure of the aircraft, comprising the fuel tanks and mid-wing section, together with special outlet nozzles of different sizes to control the running of the large radial flow fan. The design for this piece is complete, and the design point has been chosen at the sea level static case with consideration for the fact that air entering the lower intake may be heated to some degree by the exhaust flow from the gas generators. Construction is already well advanced and it is expected to be ready for first running at about the end of July 1957. —

This unit, which embodies the design of the major portion of the P.V.704 research aircraft, is part of the P.V.704 program but the results of all tests will be made available to USAF, the additional reports required etc. being regarded as part of the USAF program. Considering the work proposed under the heading of propulsion in detail, it may be itemized as follows.

5.1 Analysis

5.1.1 Design Point

1.1.6

As noted above, a preliminary design point study, upon which the gas dynamic design of the first set of rotor blades has been based, has already been completed. With standard day air entry conditions the compressor is expected to operate with good efficiency considerably below the surge point and thus a design point has been chosen to allow for the air entering the lower intake being heated to some degree by the gas generator exhaust (it will be remembered that the Viper engines breathe entirely from the upper air intake); it is estimated that the compressor will not surge until the intake temperature reaches approximately 600°K; and since from tests it is not expected that the lower intake temperature will exceed 400°K as a result of the gas generator exhaust, it is anticipated that some degree of afterburning

DECLASSIFIED

~~SECRET~~



Statement
of Work
Sub Parts

will be possible in the take-off case. Analysis at the design point is continuing, with estimates of possible modes of operation and further analysis will be required as soon as test results become available. From the gas dynamic point of view the most likely cause of difficulty appears to be that of matching the main power turbine to the Viper engines; however, the blades have been designed so that they can be replaced in convenient sub-assemblies, so that re-blading the turbine or compressor is not expected to cause undue delay.

5.1.2 Off-Design Characteristics

Estimates of the thrust of the propulsion system based on manufacturers' engine data, and estimated compressor and turbine characteristics, duct and combustion losses etc., will first be made in order to determine the performance potential of the research aircraft; and refined as improved data becomes available, largely from the six Viper rig, but also from aerodynamic nozzle and combustor test and from the Viper engine manufacturers.

5.1.3 Control System

Studies of the thrust and specific fuel consumption of the propulsion system with alternative controlled modes of operation will be analysed in conjunction with behaviour determined from the six Viper Rig. A schematic drawing illustrating a tentative system is given in Fig. 34: when a satisfactory system giving the required operation has been designed, and tested as far as possible on the six Viper rig, the propulsion unit performance for the whole range of altitude and forward speed will be presented in non-dimensional form.

5.1.4 Transient Response

The transient response of the engine to throttle setting will be determined from measurements on the six Viper rig and, if unsatisfactory, analyses will be made in order to enable the characteristics to be improved.

5.2 Test and Development

5.2.1 Single Viper Air Intake and Exhaust Tests

The double cascaded bend to the intake of the Viper gas

1.1.5.2
1.1.5.3
1.1.5.5
1.1.5.6
1.1.5.7
1.1.5.8

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

2129-1794-1

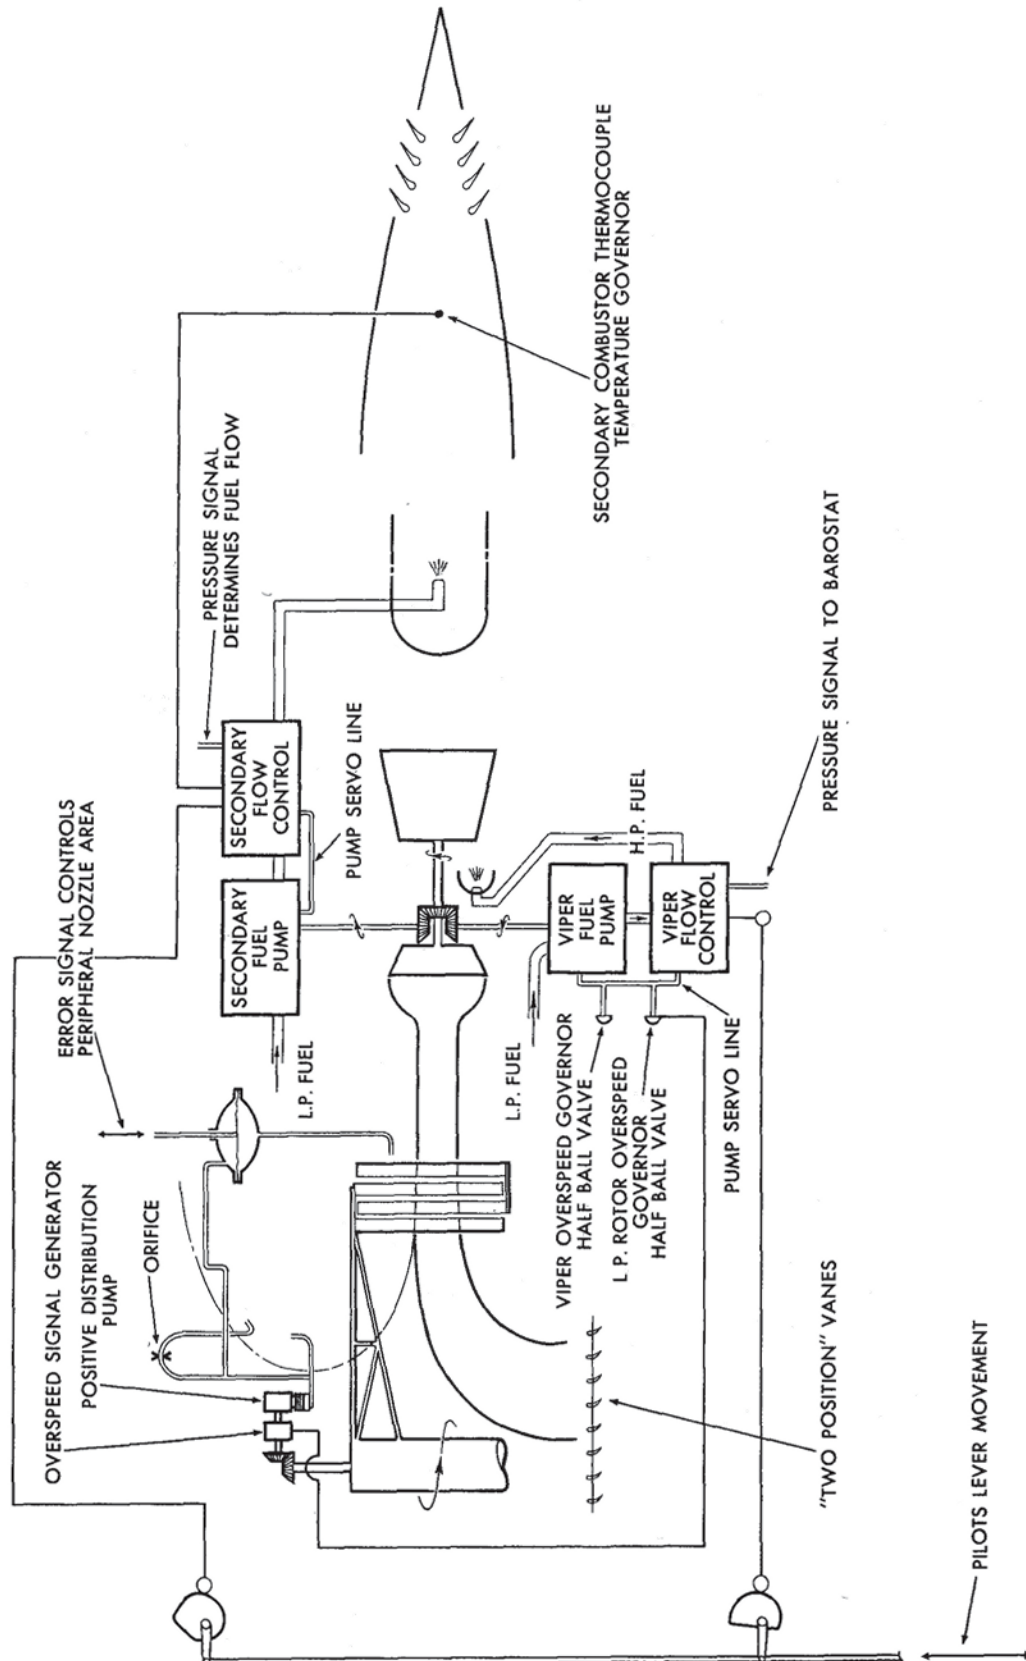


FIG. 34 SCHEMATIC OF PROPULSION CONTROL SYSTEM

DECLASSIFIED

SECRET

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

generator and the exhaust fan-tail with nozzle guide vane to the main turbine have already been tested as part of the P.V.704 program on the rig shown in the photographs of Figs. 35, 36 and the illustration of Fig. 37. For the intake, no detail measurements of the flow were taken; the engine ran perfectly satisfactorily, and it appeared that no loss of thrust could be determined. The exhaust fan-tail was tested several times and attempts were made to improve the flow at the sides. Measurements of the velocity distribution reflected a very poor distribution of velocity immediately behind the turbine on the particular engine used for test and the actual velocity distribution at nozzle exit is also difficult to determine since it was only possible to test at atmospheric exhaust pressures.

Development tests on the exhaust diffuser are anticipated with probable change in design to, if possible, sweep the exhaust in one direction and so avoid the diffusion and re-acceleration necessary with the present design.

5.2.2 Balance and Over-speed Rig

It is proposed to balance the main rotors and if possible test to limit load in the rig shown in the photograph of Fig. 38 and the illustration of Fig. 39. As will be seen from the illustration this rig is mounted immediately behind the existing test house so that the Viper engine on its present stand can be used to drive the turbine: the compressor rotates in a hollow box which also forms a shield, as shown, and by this means it is hoped to destroy most of its pumping capacity so that the rotor can be spun up by the very inefficient drive of the Viper engine jumping across two rows of turbine blades similarly set. If necessary, stators can be interposed between the first and third turbine stages: however, approximate calculations indicate that only about 70 horsepower should be required to drive the wheel at design speed.

Both wheels can be tested successively in this rig; instrumentation will consist of an I.R.D. vibration analyser, cameras to observe the deflection of the rings (see Fig. 3) and yaw probes to determine the outlet angle from the first turbine stages.

DECLASSIFIED

5.2.3 Six Viper Test and Qualification Rig

The rig is illustrated by the drawing of Fig. 40 and as

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

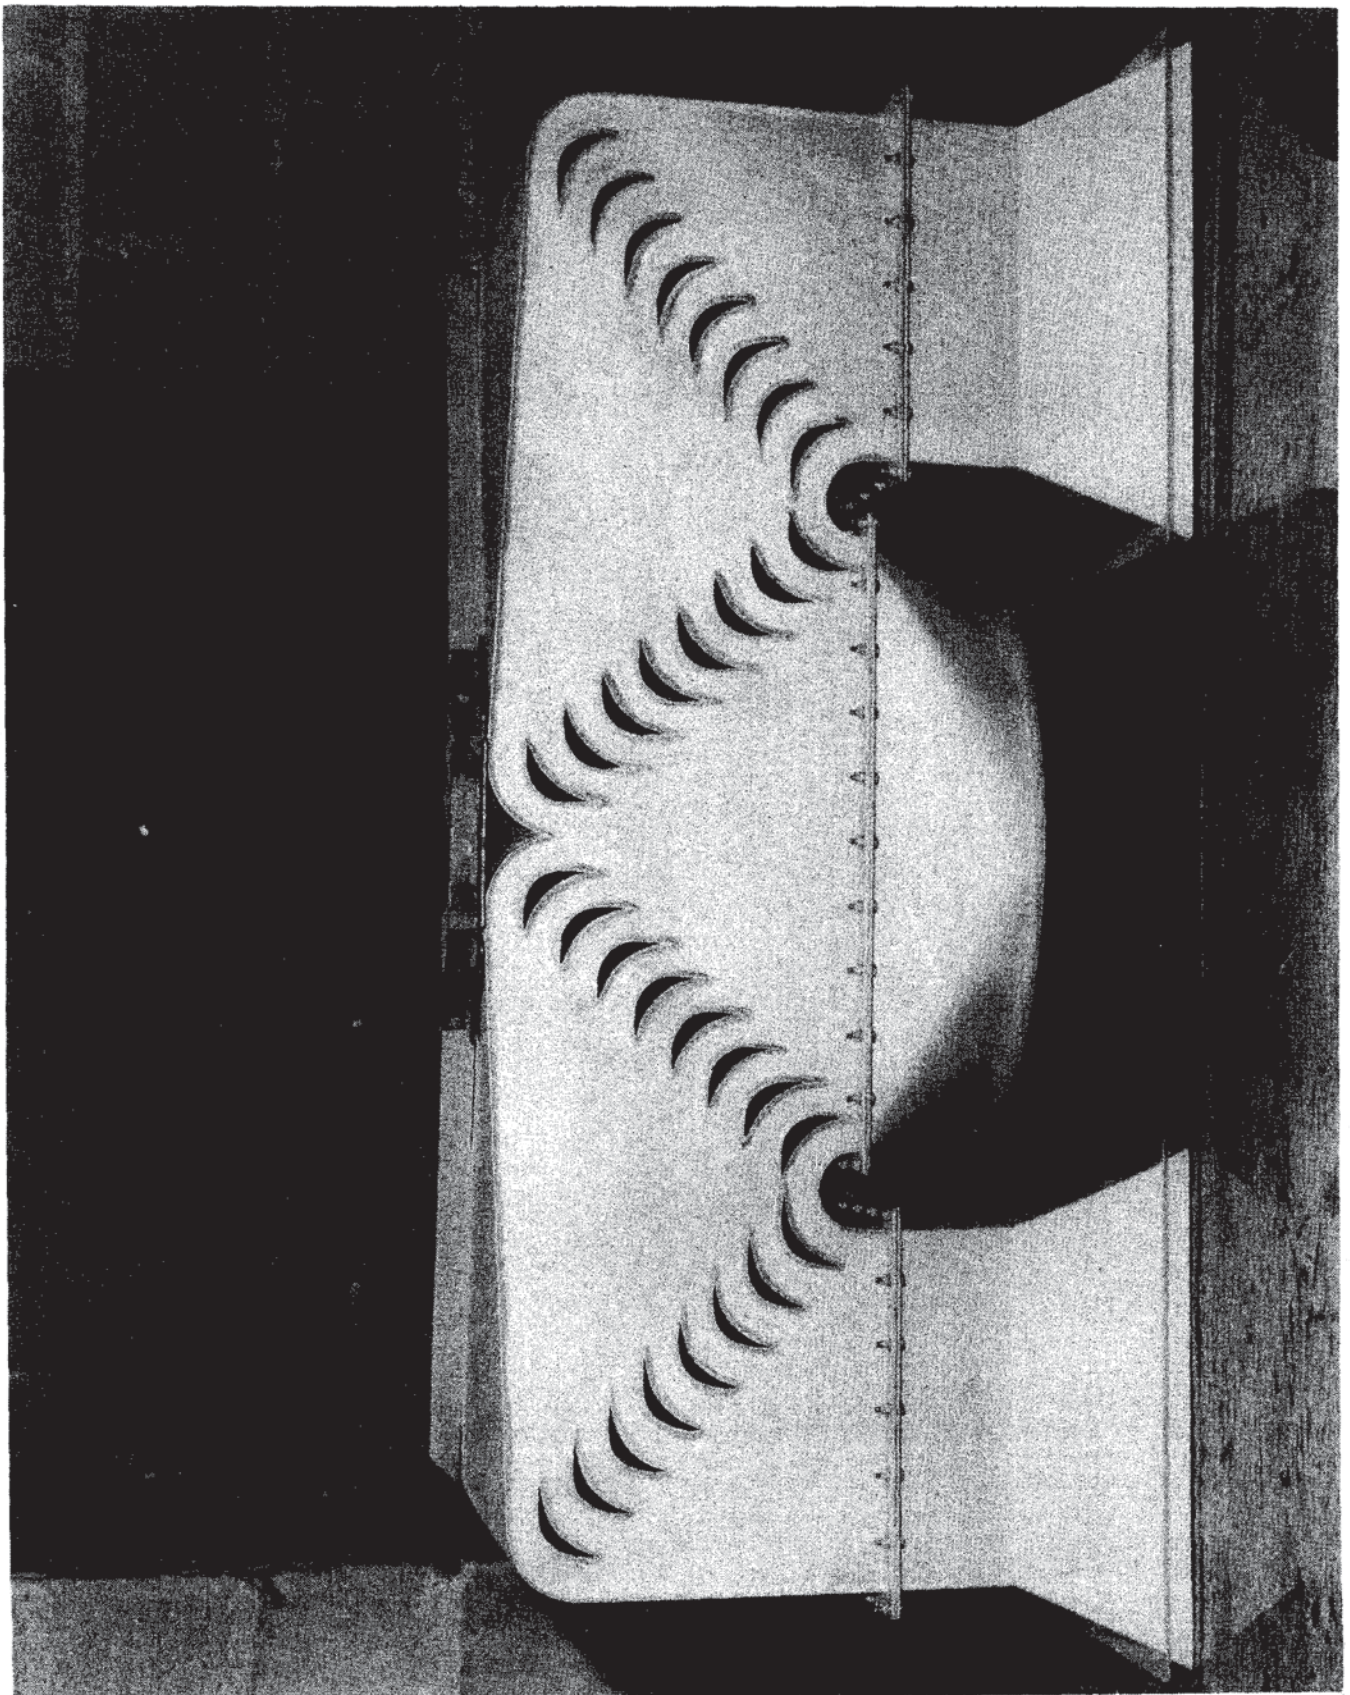


FIG. 35 VIPER AIR INTAKE

DECLASSIFIED

SECRET

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

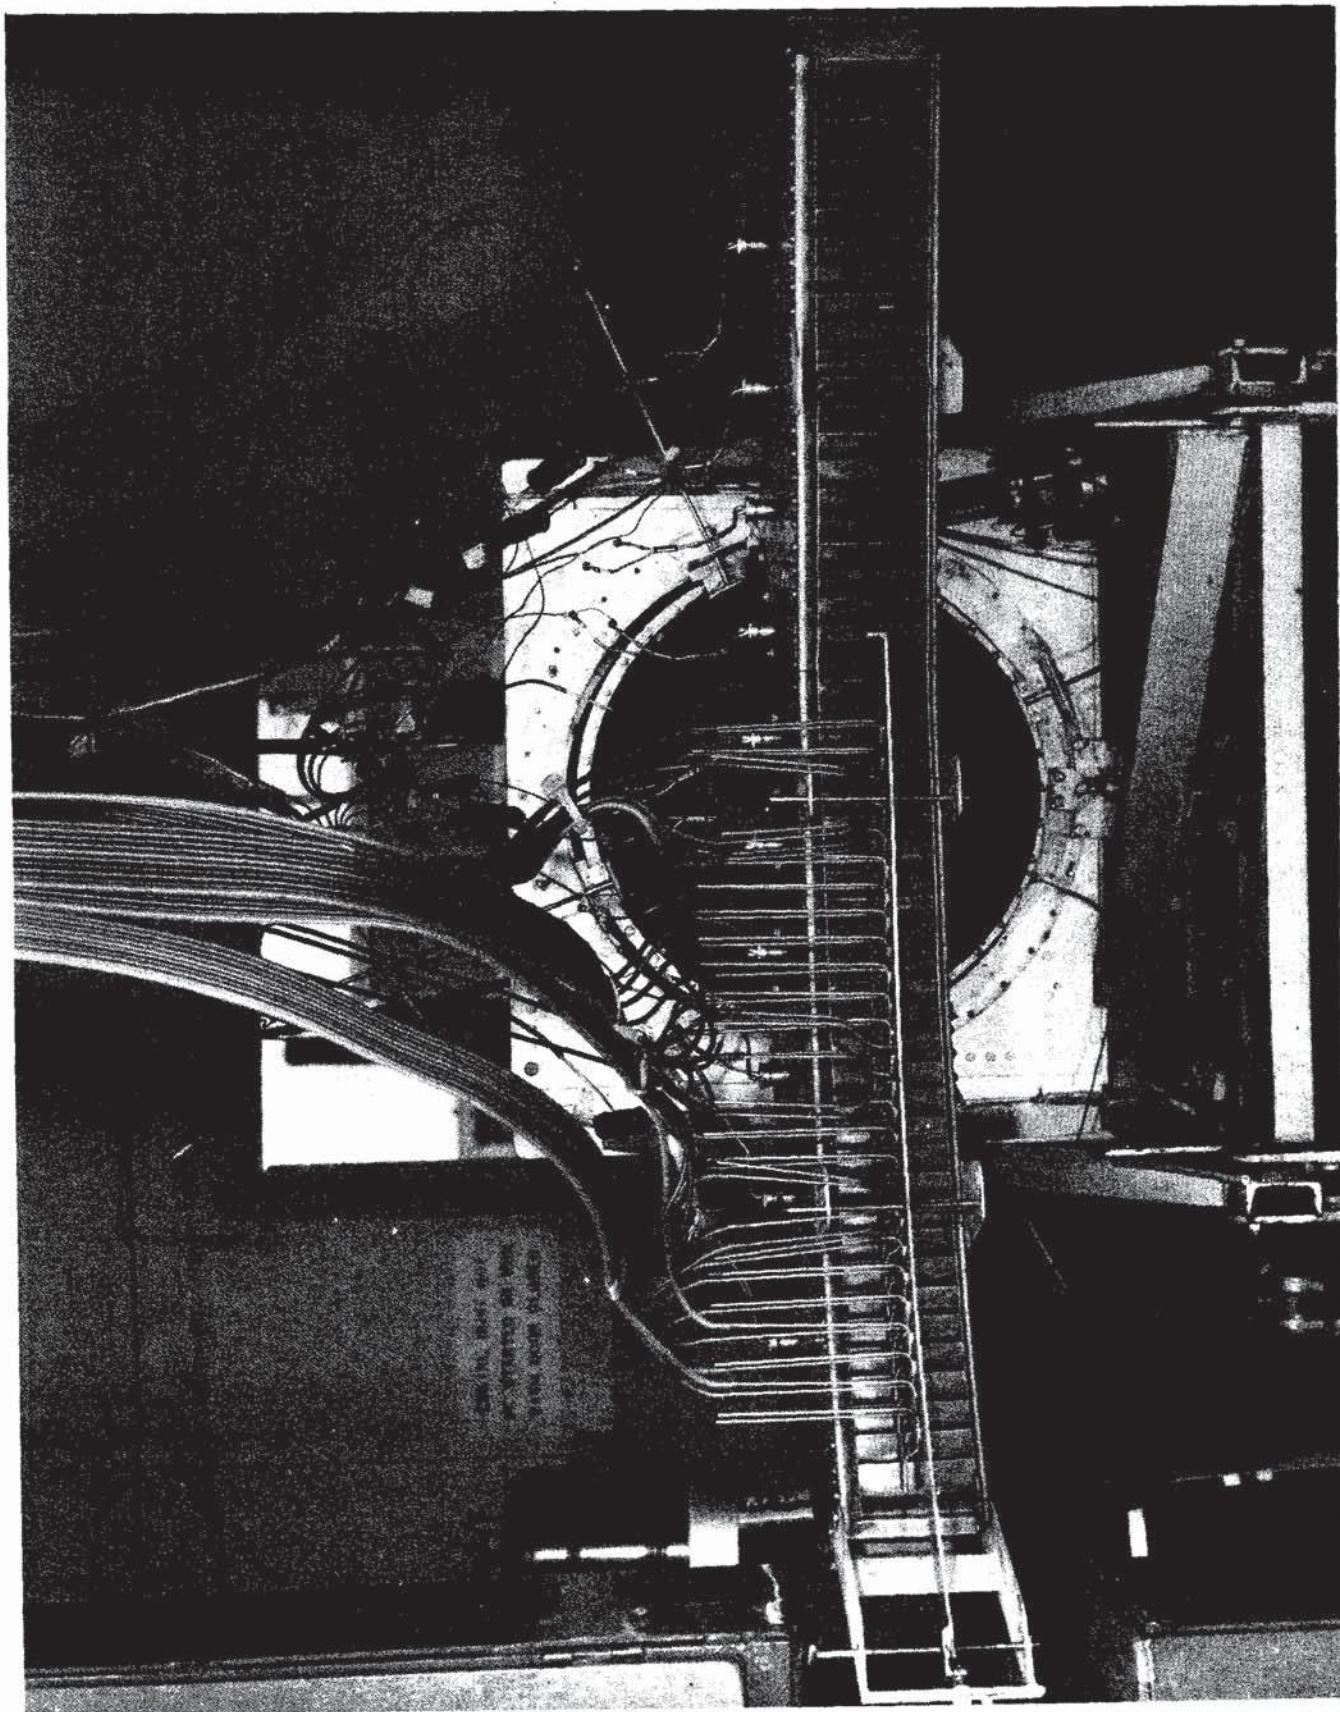


FIG. 36 EXHAUST FANTAIL TEST

DECLASSIFIED

SECRET


DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

2134-1794-1

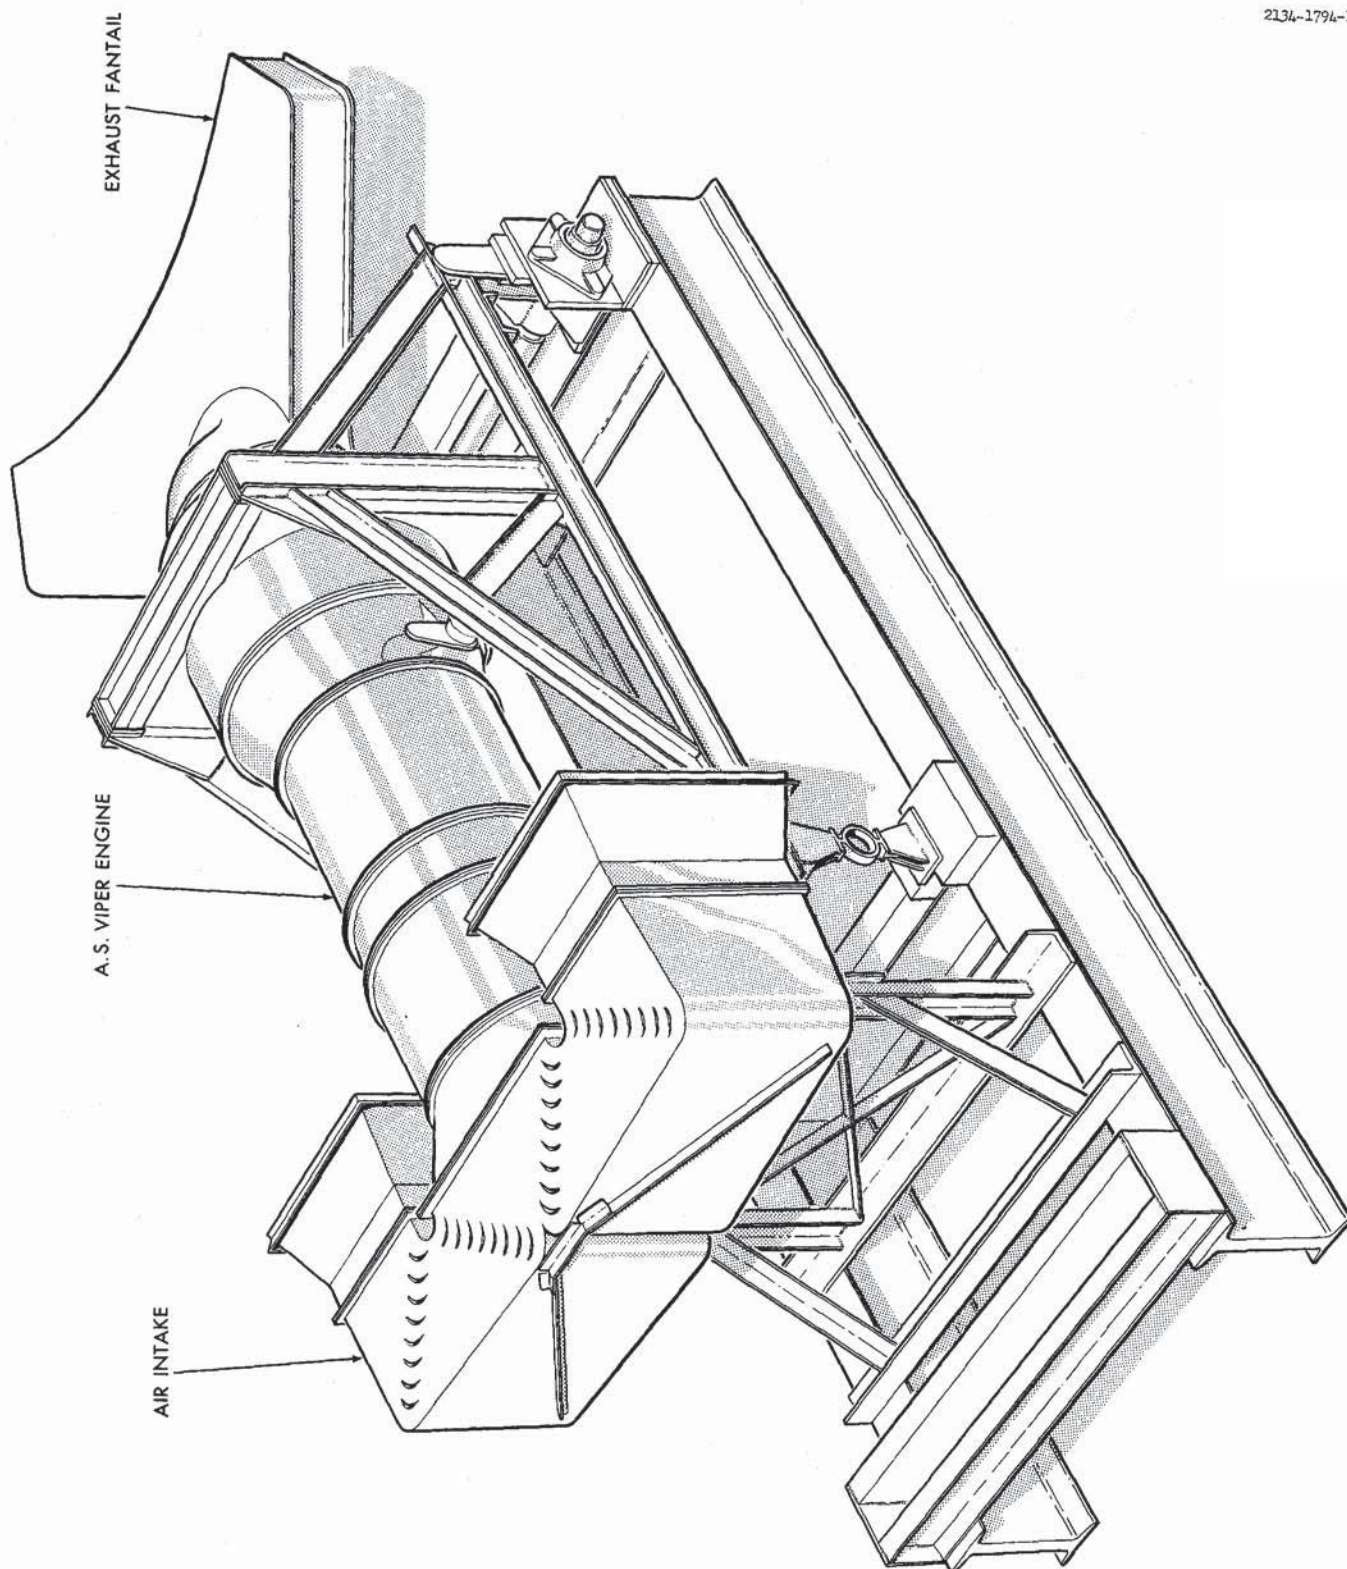

DECLASSIFIED

FIG.37 VIPER AIR INTAKE AND EXHAUST FANTAIL

SECRET

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

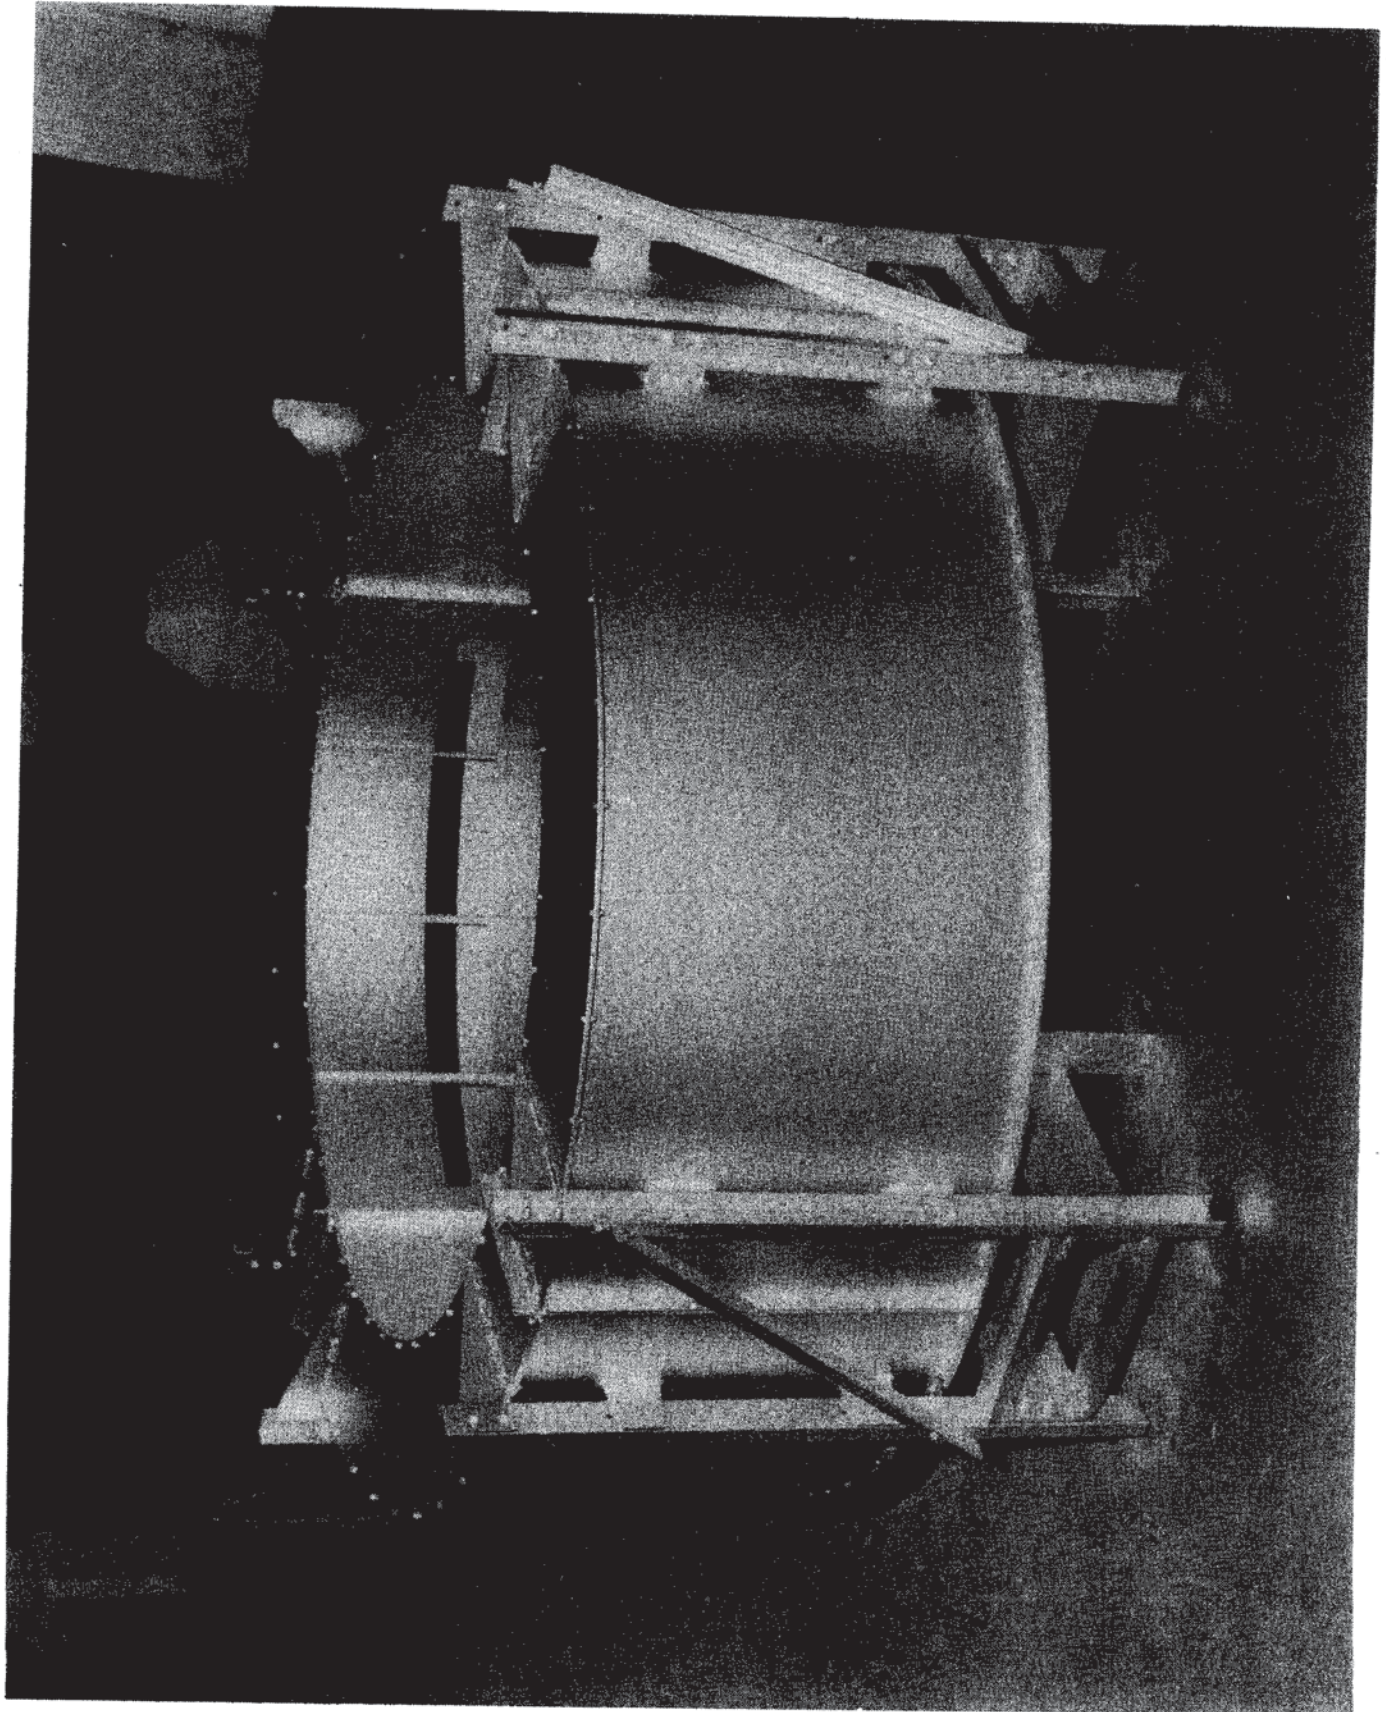


FIG. 38 OVERSPEED RIG

DECLASSIFIED

SECRET

DECLASSIFIED



PROJECT 1794

203-1794-1

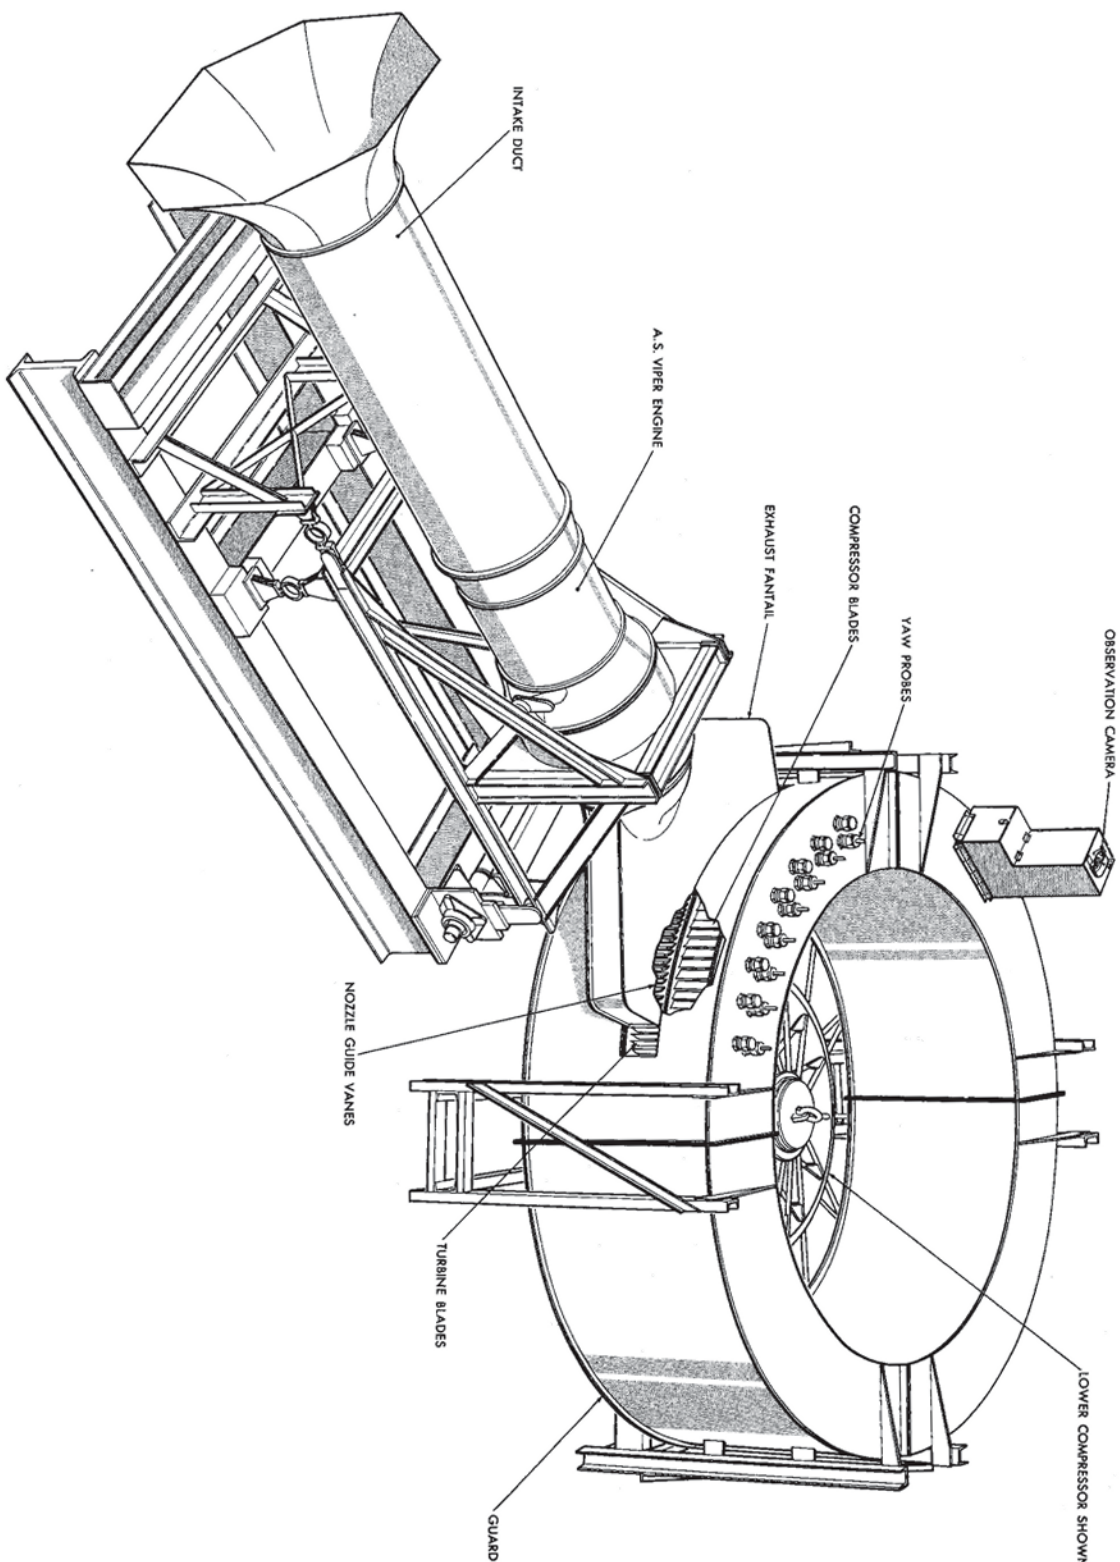


FIG. 39 BALANCE AND OVERSPEED RIG

4400000

1-94-17-272

DECLASSIFIED

DECLASSIFIED

PROJECT 1794

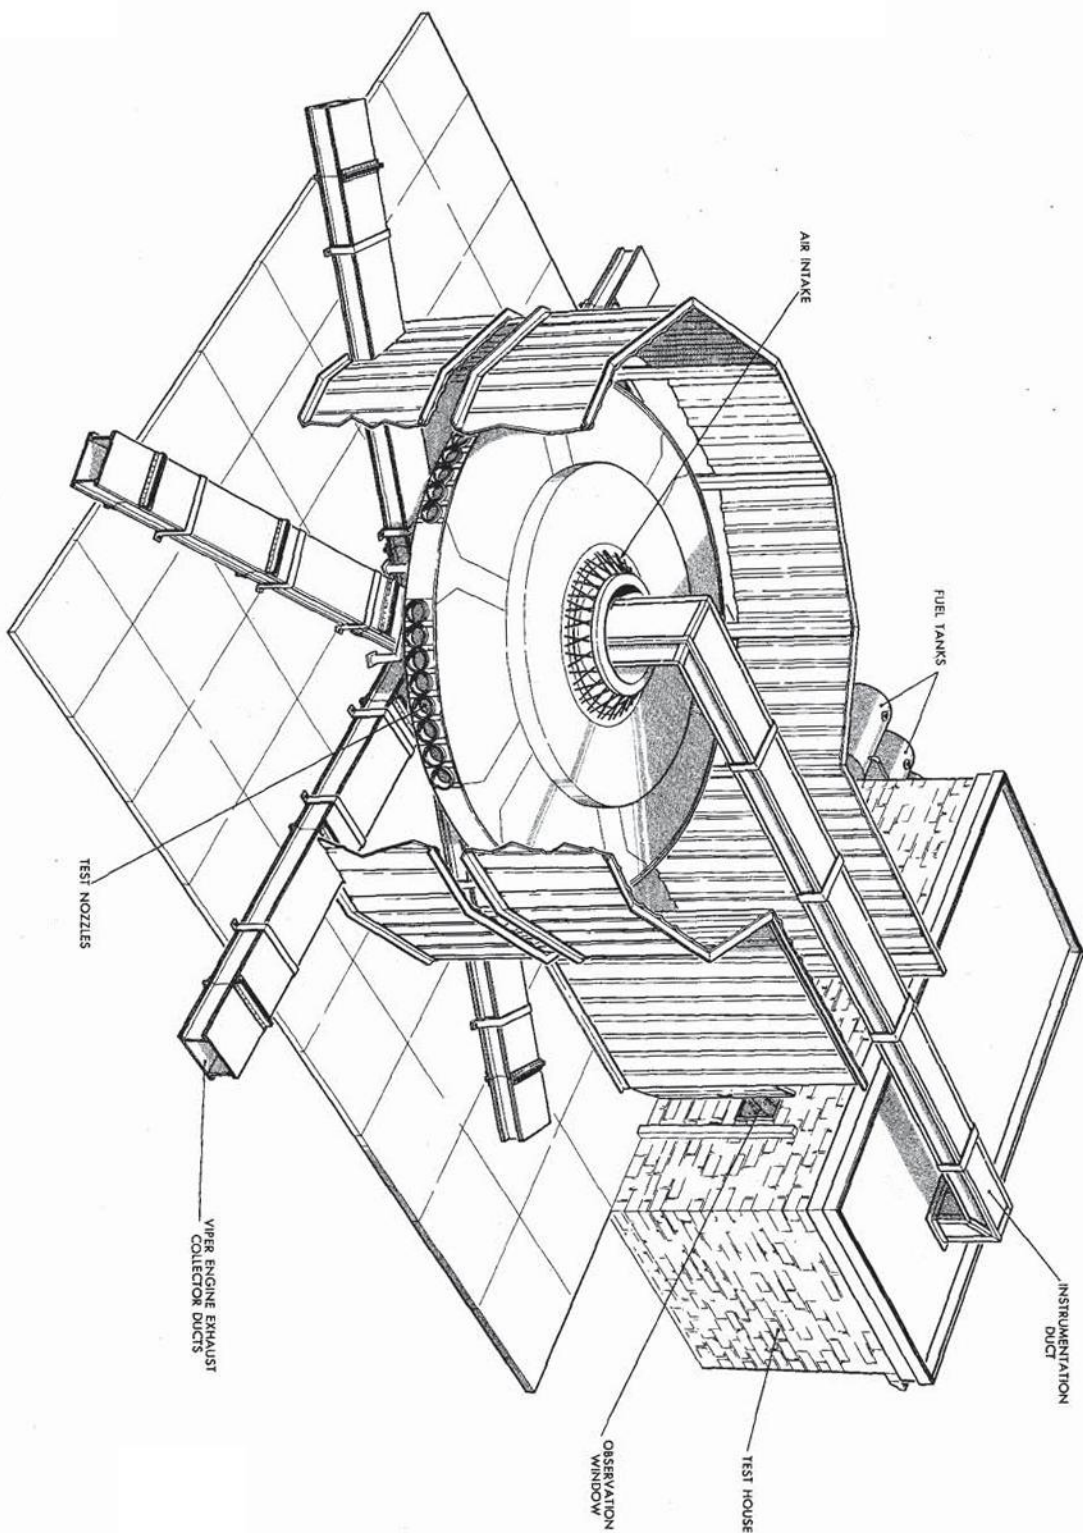


FIG. 40 TEST HOUSE AND SIX VIPER TEST RIG

~~SECRET~~

DECLASSIFIED

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

explained above consists of the whole basic structure and propulsion unit of the research aircraft. Initially ducts are fitted underneath the rig to carry away the exhaust from the Viper gas generators and also most of the air intake structure will be omitted, leading the annular air intake sinks open as far as possible to atmospheric pressure. Instrumentation will be carried back to the test house through an overhead duct (shared by the rig and engine controls) and consists of pressure and temperature measurements and rpm. Pressure surveys will be taken at radial positions at the following stations.

1. Air entry.
2. Immediately in front of the compressor.
3. Immediately behind the compressor.
4. In front and behind the turbine.

In addition a complete pressure survey will be taken at the exit of each outlet duct from one 1/6th segment of the periphery and also underneath the aircraft beneath the Viper exhaust, for thrust determination. Provision will be made for the installation of slip rings on the rotor (since the rpm is so low, large diameter slip rings should work quite satisfactorily) but the compressor and turbine blades will not initially be strain gauged.

Fuel will be supplied to the rig from separate fuel tanks installed behind the test house and engine starting will be by compressed air from an outside source.

From this rig the overall efficiency of the propulsion system can be determined including the components of compressor efficiency, turbine efficiency and the several duct losses. As development proceeds the air intake structure will be fitted and the ducting carrying away the exhaust gases will be eliminated and means provided to control the temperature of the air entering the lower intake up to the maximum value expected for the aircraft when hovering in the ground cushion.

The support afforded by the supply of additional engines as suggested by the USAF will provide satisfactory contingency allowance for engine failure in the test rig. Specific detail of the proposal for spare Viper engine supply is given in Section 5.3.

It is anticipated that a qualifying test according to specification MIL-E-5156B for prototype experimental flight will be

DECLASSIFIED

SECRET

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

Statement
of Work
Sub Parts

undertaken on the first six Viper test rig and allowance has been made for this to be carried out.

5.2.4 Combustion and Fuel System Development

1.1.7

5.2.4.1 Combustion Development

It is anticipated that Combustion Development will be sub-contracted to specialists in this field. It is expected that the principal phase of combustor development will be carried out on a single can segment of the outer wing combustion system, after preliminary flow visualization tests using water have been conducted. The sample combustor segment will then be fitted into an appropriate facility and tested over a full range of entry conditions up to Mach 3.0 as defined in Figs. 41 and 42. The combustion problem is more completely described by the graph of estimated combustion efficiency and extinction limits given in Fig. 43, and the diagram of operating conditions shown on page 66.

Changed

The first phase of combustor development testing, is covered by the work proposed and will enable a similar graph to that of Fig. 43 to be constructed and the pressure loss at the various operating conditions in the table to be determined for the first working combustor. This development phase is covered by the present contract.

These results will then be applied to determine the performance of the proposed Mach 3.0 research vehicle and both the necessary degree of improvement and the required continuing level of effort may then be determined.

It is further anticipated that sufficient mechanical development will have been carried out during this phase to enable the one set of combustion equipment for the prototype P.V.704 to be manufactured.

5.2.4.2 Fuel System

Fuel System development will be sub-contracted to specialists along with combustion development. System requirements for a Mach 3.0 aircraft of the 1794 type will be analyzed.

It is anticipated that the fuel system for this vehicle will

DECLASSIFIED

SECRET

SECRET

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

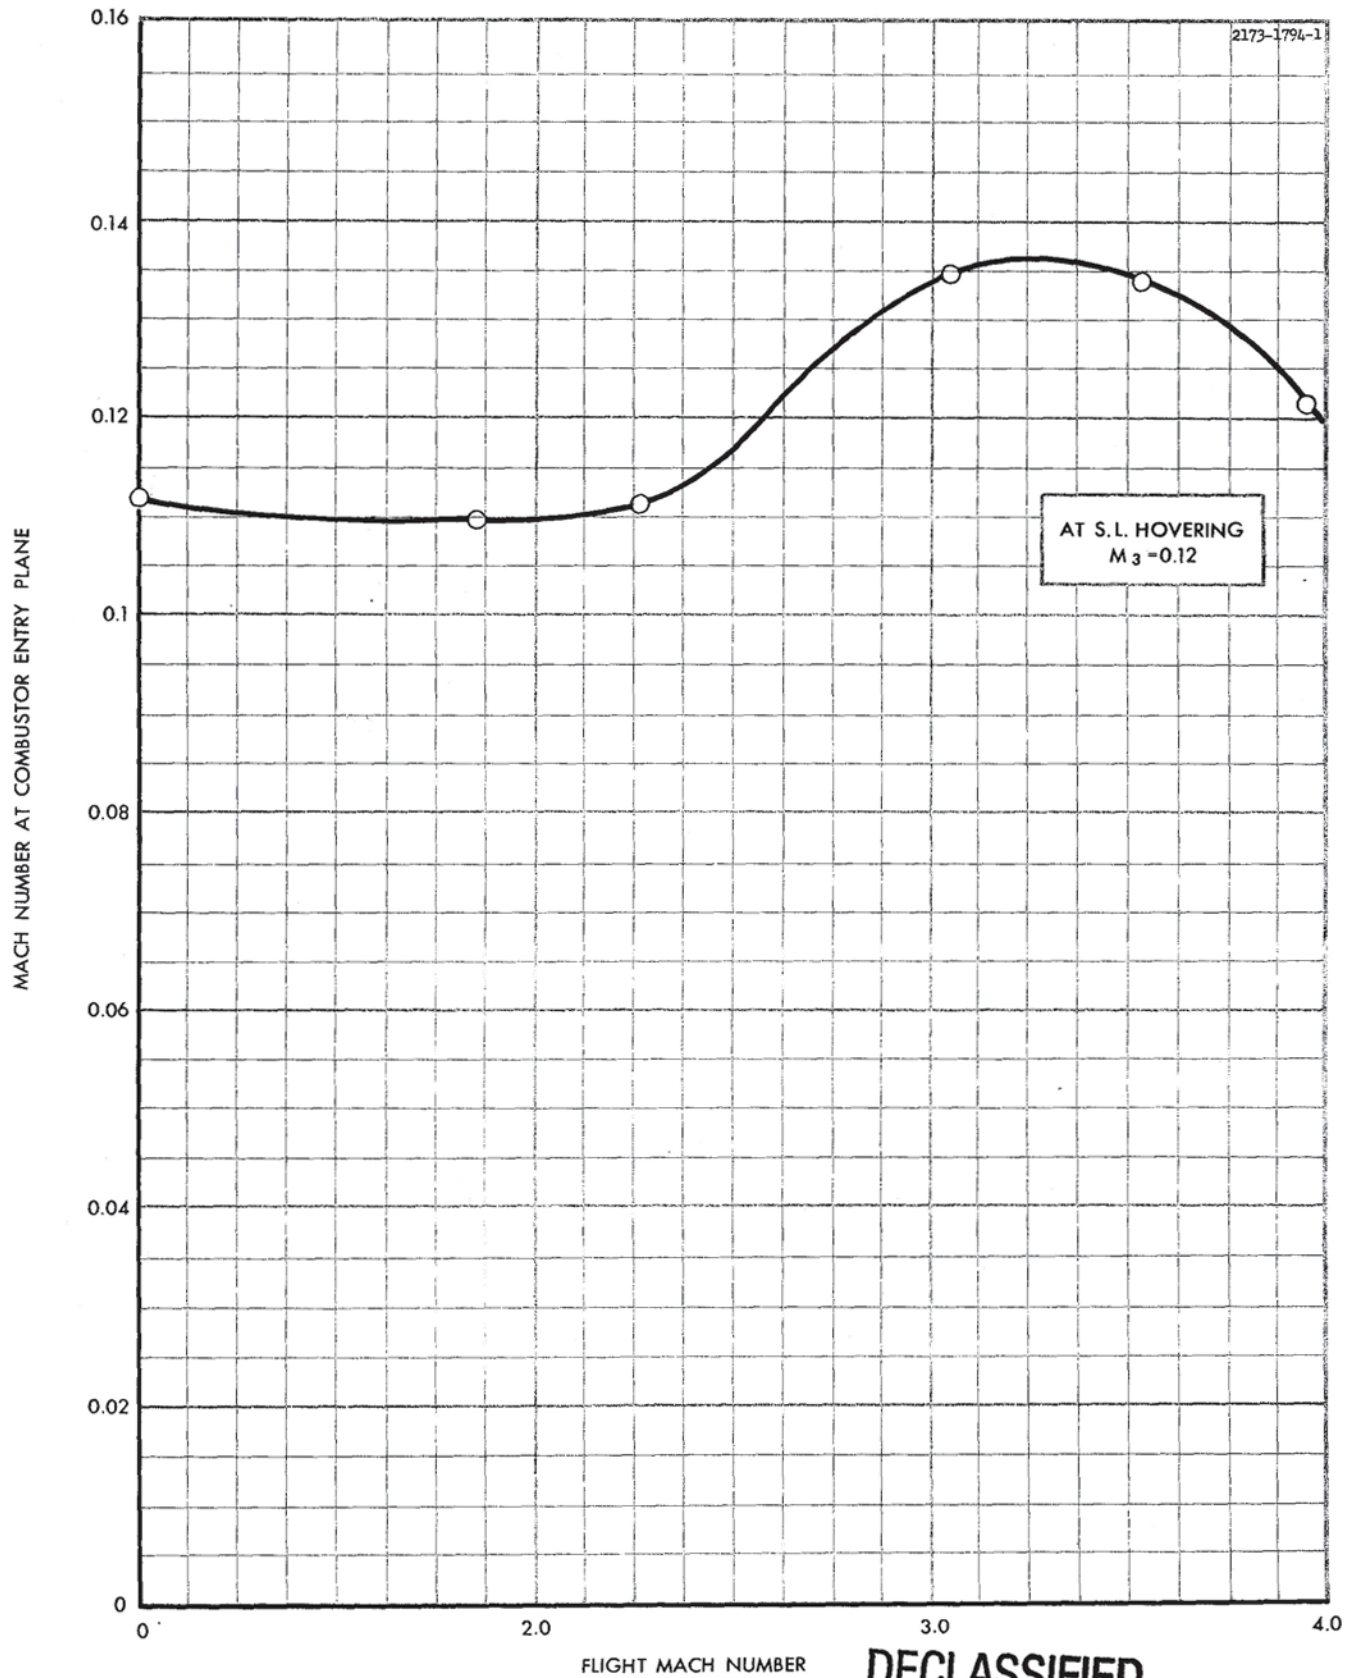


FIG.41 COMBUSTION ENTRY MACH NUMBER

SECRET

SECRET

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

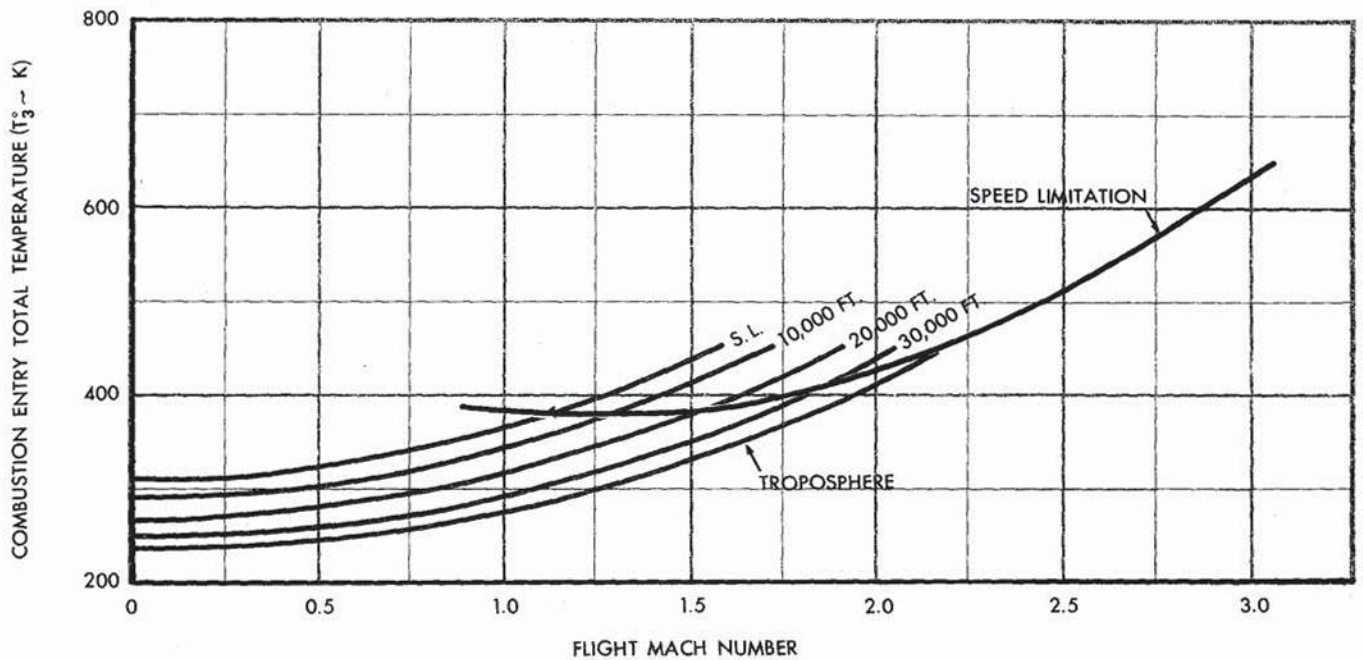
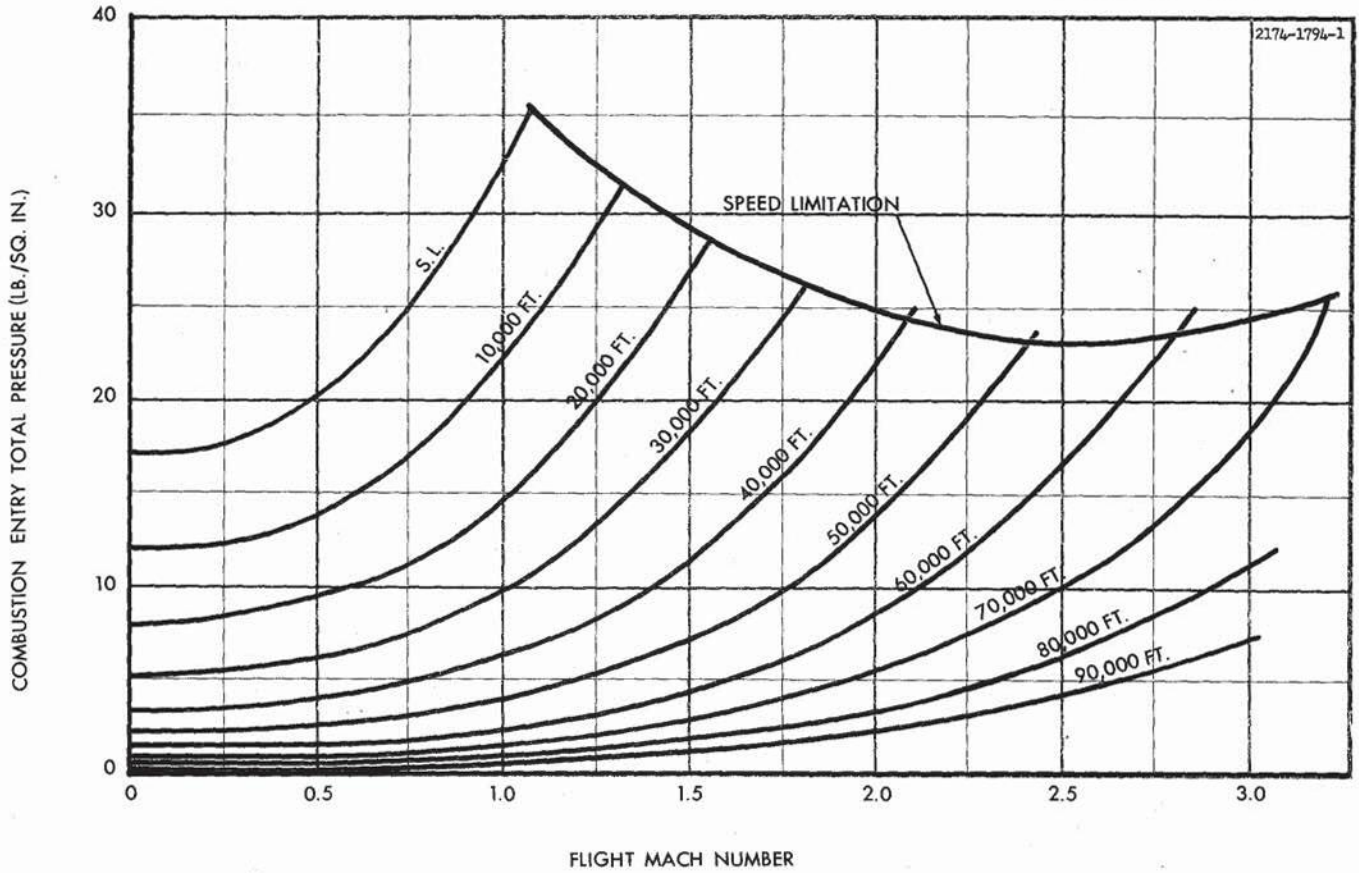


FIG. 42 COMBUSTION ENTRY PRESSURE AND TEMPERATURE

DECLASSIFIED

SECRET

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

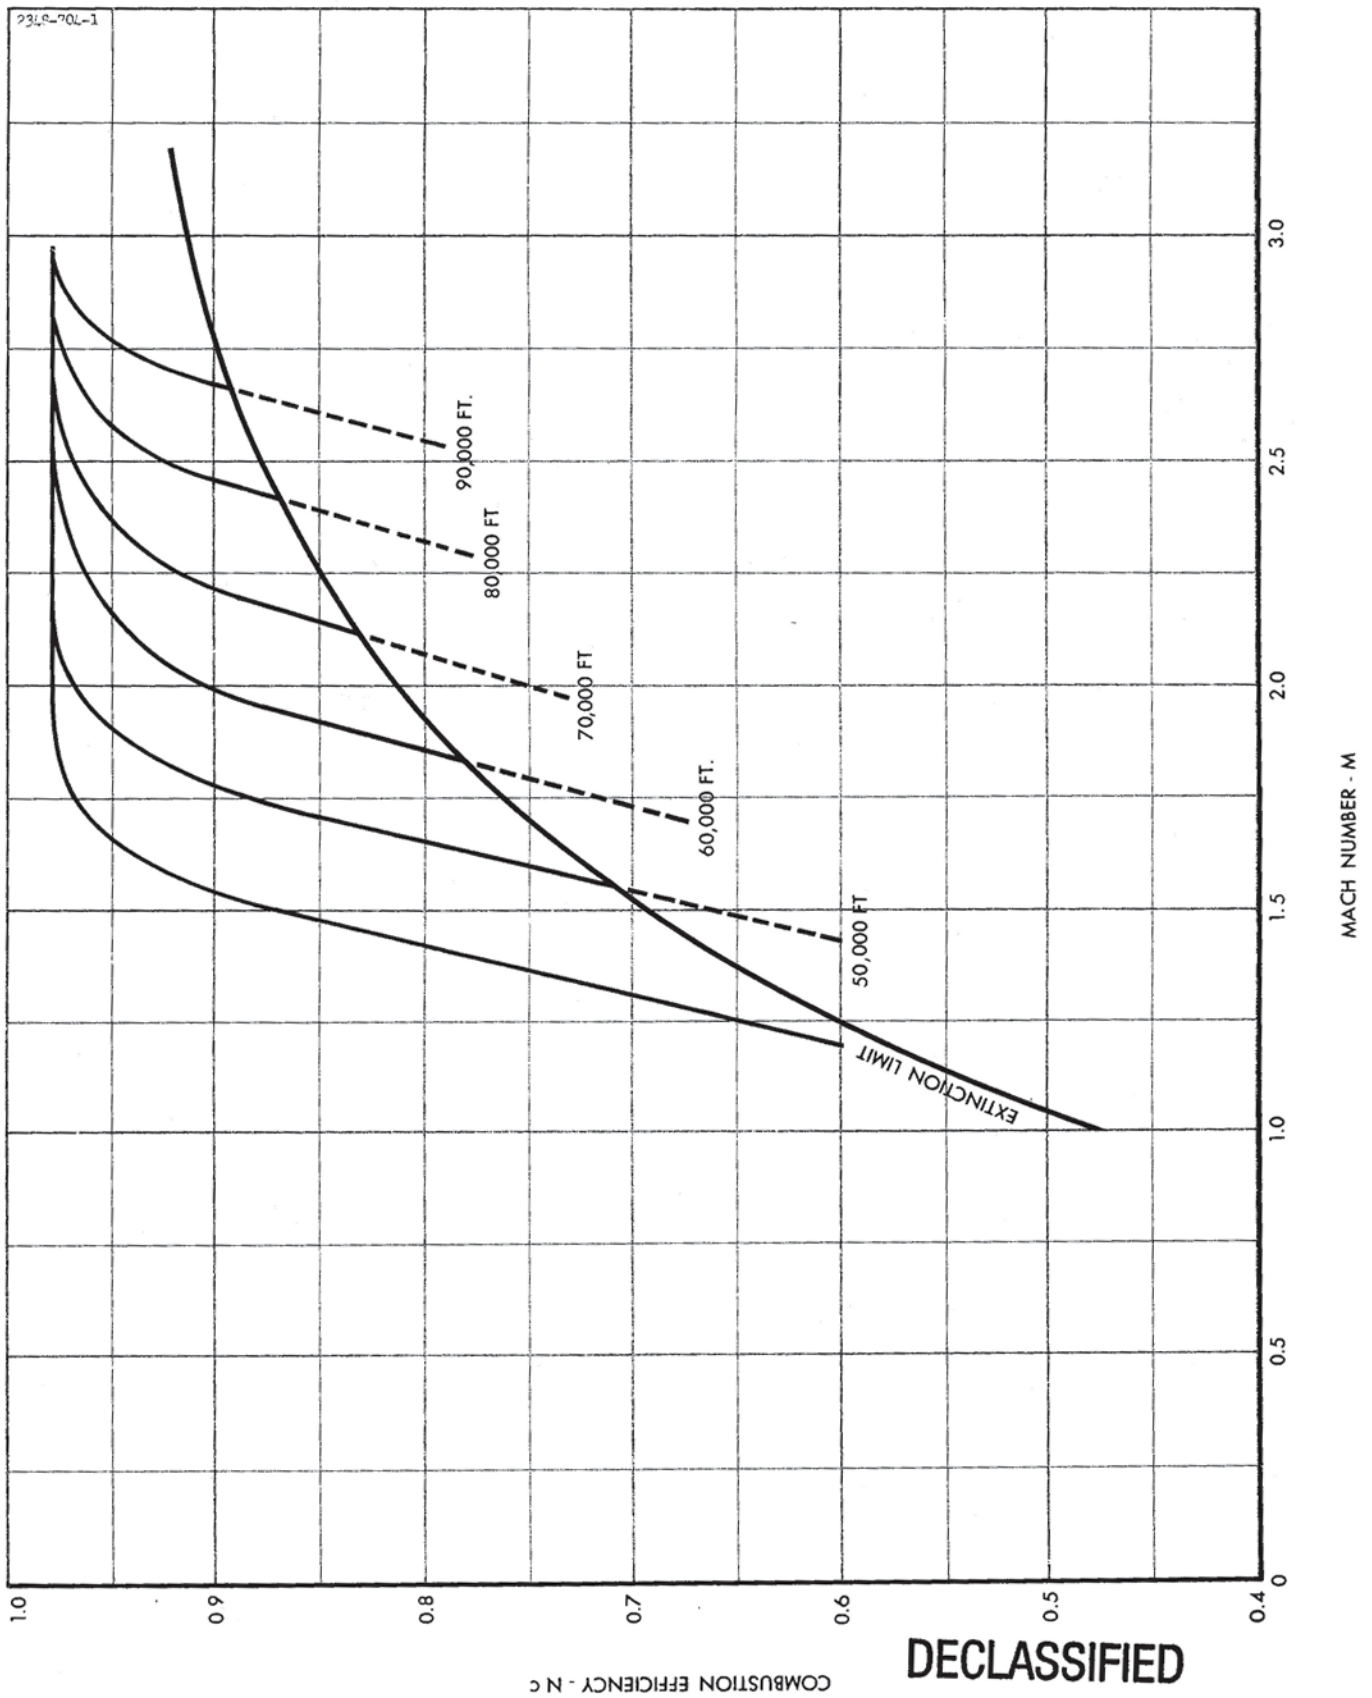


FIG. 43 COMBUSTION EFFICIENCY N_c VS MACH NUMBER - M

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

involve the design and development of new items such as the flow control unit etc. Standard fuel pumps will however be suitable, and it is probable that one pump in each sector will supply fuel both to the associated engine and the outer wing combustors. This will probably be a variable displacement piston type pump fitted to the new accessories gear box of the Viper engine which is shown in Fig. 4.


With regard to control, a constant maximum combustion temperature can be approximately maintained by the use of a fuel air ratio control giving a linear relationship of fuel flow to air pressure. However at high aircraft flight Mach numbers the line departs appreciably from a unique characteristic due to the rapid increase of air temperature at inlet to the combustion system. Two methods are available to reduce or eliminate this discrepancy. The first is to sense the variable temperature and apply this as a correction to the fuel air ratio control. Alternatively a good degree of compromise can be achieved by relating fuel flow to the total ram pressure sensed from a simple pitot head measuring the pressure after a simple plane shock. The latter method gives a reasonably constant combustion temperature for a given throttle setting and is probably satisfactory.

In order to control maximum temperature, a temperature limiter will be included. This will probably take the form of a mercury vapor pressure unit inserted in the combustion system prior to the nozzles which reacts on a fuel potentiometer controlling the fuel flow going to combustion. In addition to controlling maximum temperature some arrangement will be required to prevent the Viper engines from overspeeding the main central rotors. This can be achieved by the use of a governor controlling the fuel to the Viper engine. A preliminary diagram of the whole control system is given in Fig. 34.

For the Mach 3.0 research aircraft all control units will, of course, be designed from material suitable for the temperature likely to be attained during high speed flight. Up to Mach 3.0 this is not expected to present any very serious problems.

The foregoing remarks approximately describe the type of system which is envisaged and upon which a thorough analysis and design study will be submitted. For the prototype aircraft, however, a much simpler fuel system is initially proposed. This will be installed in the aircraft from

DECLASSIFIED



the very start, and will assist with the hovering control and will provide an early practical introduction to the effects of combustion in the outer wing. This system will not require the development of fuel system units since it will be made up of standard existing items. The fuel pumps will be those already on the Viper which have a capacity double that required to supply the Vipers. The flow control unit will be a simple proportional control valve enabling the aircraft to operate up to some limited altitude of the order of 10,000 feet.

5.2.4.3 General

To recapitulate briefly the scope of work included in this phase of combustion and fuel system development is:

- (a) First phase development of sample combustor, to enable one aircraft set to be manufactured and including evaluation of performance for application to Mach 3.0 aircraft study.
- (b) Manufacture first of a 1/6 segment set followed by a complete aircraft set of the above combustors - i.e. the flame tubes, burners etc., not the outer wing into which they will be fitted; the latter will be done by Avro Aircraft as part of the P.V. 704 program.
- (c) Design and analyse a fuel system for a Mach 3.0 aircraft and associated control system.
- (d) Design and manufacture a basic fuel system using existing components and the Viper engine fuel pumps.

A preliminary design specification based on estimated values will be submitted prior to initiation of development effort.

Further to this, i.e. after completion of this phase of work, a general design specification for the combustion and fuel system will be written. This will form a separate part of the propulsion system report supplementary to the specification of the propulsion system as a whole and MIL-E-8220 (ASG) will be used as a guide in its preparation. The following specific items will be included.

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

- (a) Design information necessary to define the components, assemblies and systems to be developed, including drawings, weight estimates and material requirements.
- (b) Variations of inlet conditions (temperature pressure and Mach No. profiles) appearing at the burner face during the more significant phases of engine operation. (Note - Preliminary values are quoted in Figs. 42 and 43 of this report).
- (c) Specific combustor performance including combustion efficiency and stability limits. (Note - Preliminary values are quoted in Fig. 41 of this report).
- (d) Significant parameters to be used by the fuel control system. (Note - See Section 5.2.4.2 above and Fig. 34 of this report).

5.2.5 Shutter Tests

The outlet nozzles may be alternatively considered as part of the propulsion system or of the aircraft control system. It is considered convenient to regard the mechanical development of the shutters as part of the propulsion system. For this development two rigs are envisaged.

5.2.5.1 Single Nozzle Shutter Development

A single nozzle segment containing one pair of nozzles complete with operating mechanism will be constructed and fitted to the back of the Viper engine for shutter tests. This will be the first completely representative shutter functioning test series and tests will be run up to the maximum operating pressure for the outer wing and to a temperature of about 700°C. This segment will be fitted in place of the exhaust fantail in the illustration of Fig. 37.

5.2.5.2 Eight Nozzle Outer Wing Segment

Combustion equipment for a complete 1/6th segment will then be supplied by the subcontractor and fitted to a prototype outer wing segment (manufactured as part of the P.V.704 company program), so that the shutters can be functioned to the full operating temperatures. Fig. 44 illustrates.

DECLASSIFIED

SECRET

DECLASSIFIED

AURO AIRCRAFT LIMITED



PROJECT 1794

OPERATING CONDITIONS

Flight Altitude	Mach No.	Inlet Pressure	Inlet Temp.	Inlet Casing Mach No.	Inlet Velocity	Total Air Mass Flow	Total Air/Fuel Ratio	Total Fuel Flow	Total Fuel Flow Per Chamber	Pilot Fuel Flow Per Chamber	Main Fuel Flow Per Chamber	Pilot Atomising Pressure	Main Atomising Pressure	Pressure Loss	Combustion Intensity	
K.FT		P.S.I.A.	°K.		FT/SEC	LB/SEC		G.P.H.	G.P.H.	G.P.H.	G.P.H.	P.S.I.	P.S.I.	% OF INLET PRESS.	MCHU/FT ² / HR/ATM.	
	0	16.8	308	0.112	129.4	643	41.9	6920	144	10.05	133.95	283	330	0.977	5.82	12.85
*	0	21.5	331	0.110	131.6	779	42.9	8170	170	12.18	157.82	416	458	1.117	5.19	11.85
*	0.8	25.7	348	0.110	135.0	909	43.7	9360	195	14.2	180.8	566	600	1.286	5.00	11.35
*	0.8	11.5	300	0.110	125.2	437	41.5	4740	98.7	6.82	91.88	131	155	0.659	5.73	12.85
Ø	1.54	28.3	382	0.1185	152.0	1026	45.3	10180	212	16.04	195.96	723	707	1.501	5.30	11.25
*	35	24.8	410	0.133	177.0	975	46.7	9400	196	15.23	180.77	650	600	1.556	6.27	11.85
*	50	22.6	490	0.136	198.0	833	51.8	7230	151	13.0	138.0	474	350	1.265	5.59	10.0
*	2.4	8.6	490	0.136	198.0	317	51.8	2750	57.3	4.95	52.35	68.9	50.5	0.481	5.59	10.0
70	3.0	17.6	630	0.120	198.0	505	63.4	3590	74.8	7.89	66.91	175	82.5	0.612	3.48	6.36
90	3.0	6.7	630	0.120	198.0	192	63.4	1360	28.3	3.0	25.3	25.3	11.8	0.233	3.48	6.36

* FLIGHT PLAN CONDITIONS Ø SPEED LIMIT CONDITIONS

~~SECRET~~

DECLASSIFIED

DECLASSIFIED

AURO AIRCRAFT LIMITED

2056-1794-1



PROJECT 1794

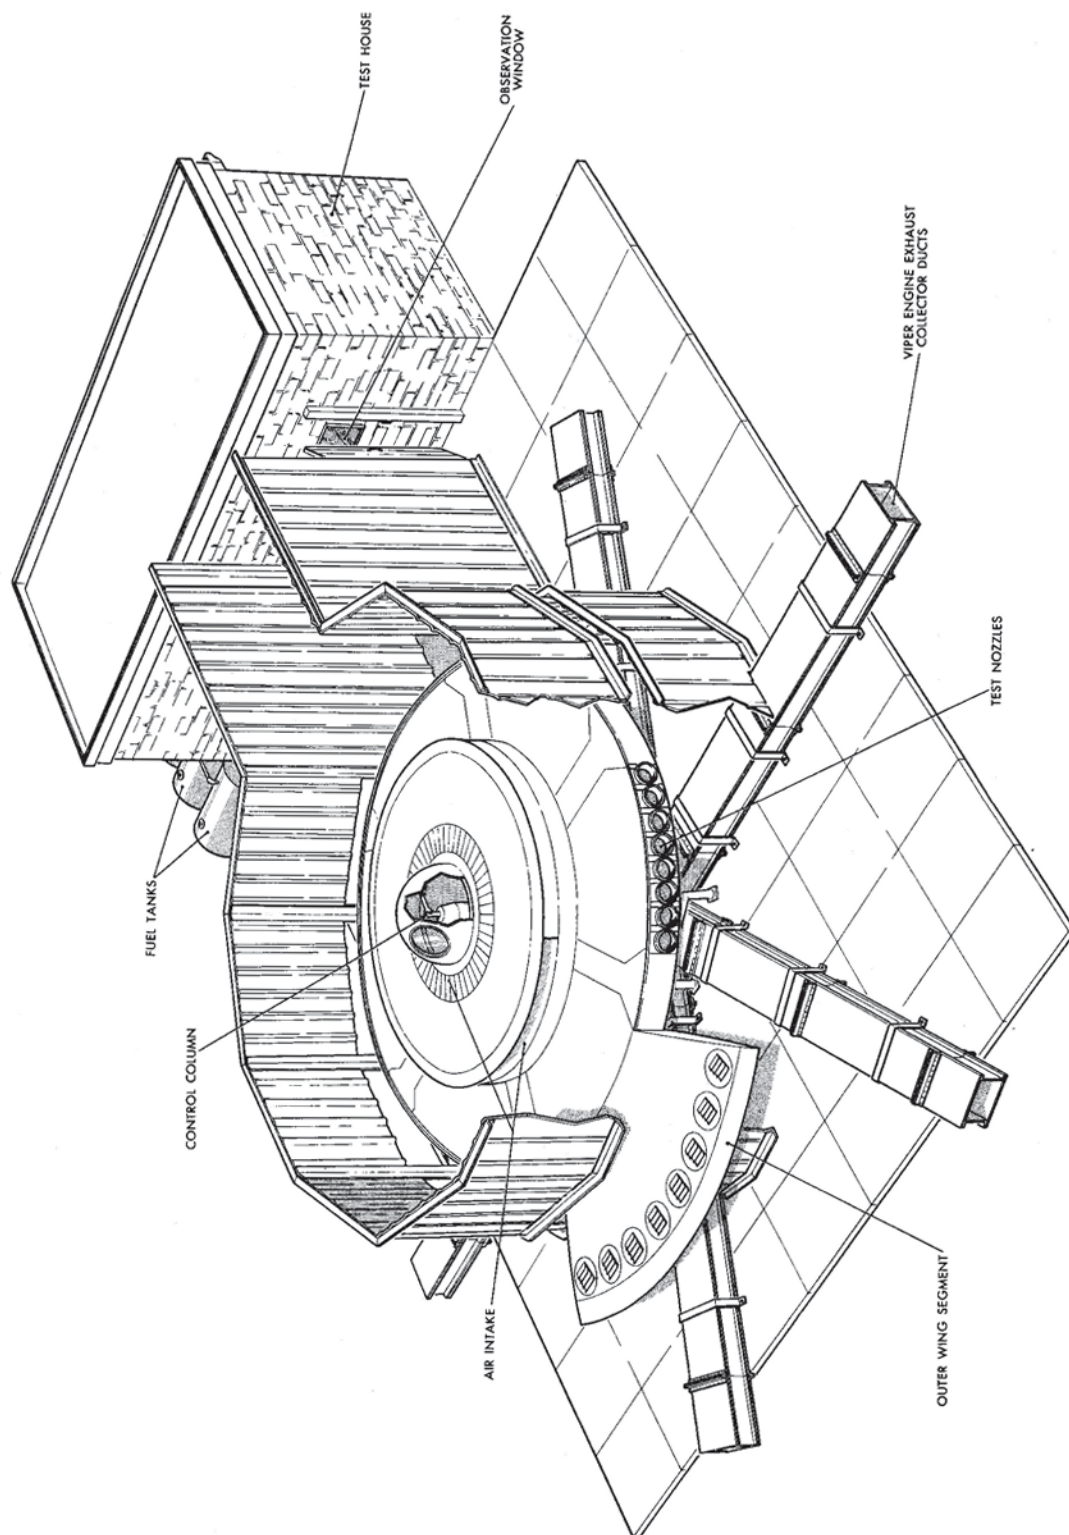


FIG. 44 SIX VIPER TEST RIG WITH OUTER WING AND COCKPIT

SECRET

DECLASSIFIED

721 1794 1

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

It is visualized that the qualification of the control shutters will be carried out on this segment, probably without after-burning to start with, followed by several stages at different temperature levels. The initial qualification of the control shutters will as far as possible be carried out concurrently with a type test for the propulsion unit in order to enable flight to begin at the earliest possible date.

new section

5.3 Propulsion System Specification and Report

In view of the unique integration of the propulsion system with the aircraft on Project 1794 the specification of the research aircraft and weapon system studies called for in Section 3.1 of this Planning Program will include details of propulsion system components; for example drawings (see p. 13) will be provided for the main rotors and also of the outer wing showing installation of combustor cans etc.

The propulsion system as a whole will be specified as a separate part of the propulsion report however, in addition to those parts appearing in the aircraft specification. This former specification will include -

- (a) Compressor map.
- (b) Turbine map.
- (c) Detail weight estimates for the components.
- (d) Presentation of performance parameters-thrust, mass flow and specific fuel consumption.
- (e) Combustor and fuel system specification.
- (f) Control system design details.

The propulsion report will specifically include the following items:

- (a) Experimental verification of the performance of the compressor.
- (b) A summary of the calculations for matching the components of the propulsion system.
- (c) A discussion of stall margins and control action.

DECLASSIFIED



5.4 Spare Viper Engines

The Viper engines which will initially be fitted to the six Viper test rig will be standard Viper ASV8 "Provost" type engines. For the first prototype however, "Up-rated" ASV8 engines - offered by the manufacturers by means of simple modification to the flow control unit - are required.

Additionally to the flow control unit change, further modification to the prototype engines is desirable at some point, principally to incorporate the new air intake casting and remote accessories gearbox shown in Fig. 4.

Orders have therefore been placed by Avro Aircraft Limited for eight standard ASV8 engines - seven to be delivered by April 1957 and one to be retained by the manufacturers for modification and installation of the new accessories gearbox. Thus the six Viper rig can initially be operated with one spare engine, a second becoming available in modified form in due course. From the point of view of operating the test rig this is regarded as a marginal arrangement and for the prototype the remaining seven engines have to be returned for overhaul and modification at completion of rig running.

Additional spare engines are therefore most desirable not only to provide increased contingency for rig running but to allow its continuance during modification of the first seven engines and thus avoid considerable delay. However, in view of the existing order, it is clear that additional spares should now be provided in the modified form shown in Fig. 4. Bearing in mind the obvious desirability of having a complete set of modified engines delivered to a given date it is evidently necessary to order a further 6 engines of this type.

The modified engines are, of course considerably more expensive than the standard. In view of the fact that the modifications are not strictly required for rig running it is considered inappropriate that the USAF be asked to bear the cost of these and thus the amount quoted in this proposal is for the set of standard engines which will be used first in the six Viper test rig.

5.5 Work Chart, Scheduling and Cost


The work chart of Fig. 45 illustrates the relationship of the items mentioned and denotes those which are part of the P.V. 704 items. Scheduling is given in Fig. 46. Cost and manhour estimates are shown on pages 95-108.

DECLASSIFIED

AVRO AIRCRAFT LIMITED

PROJECT 1794

2119-1794-1

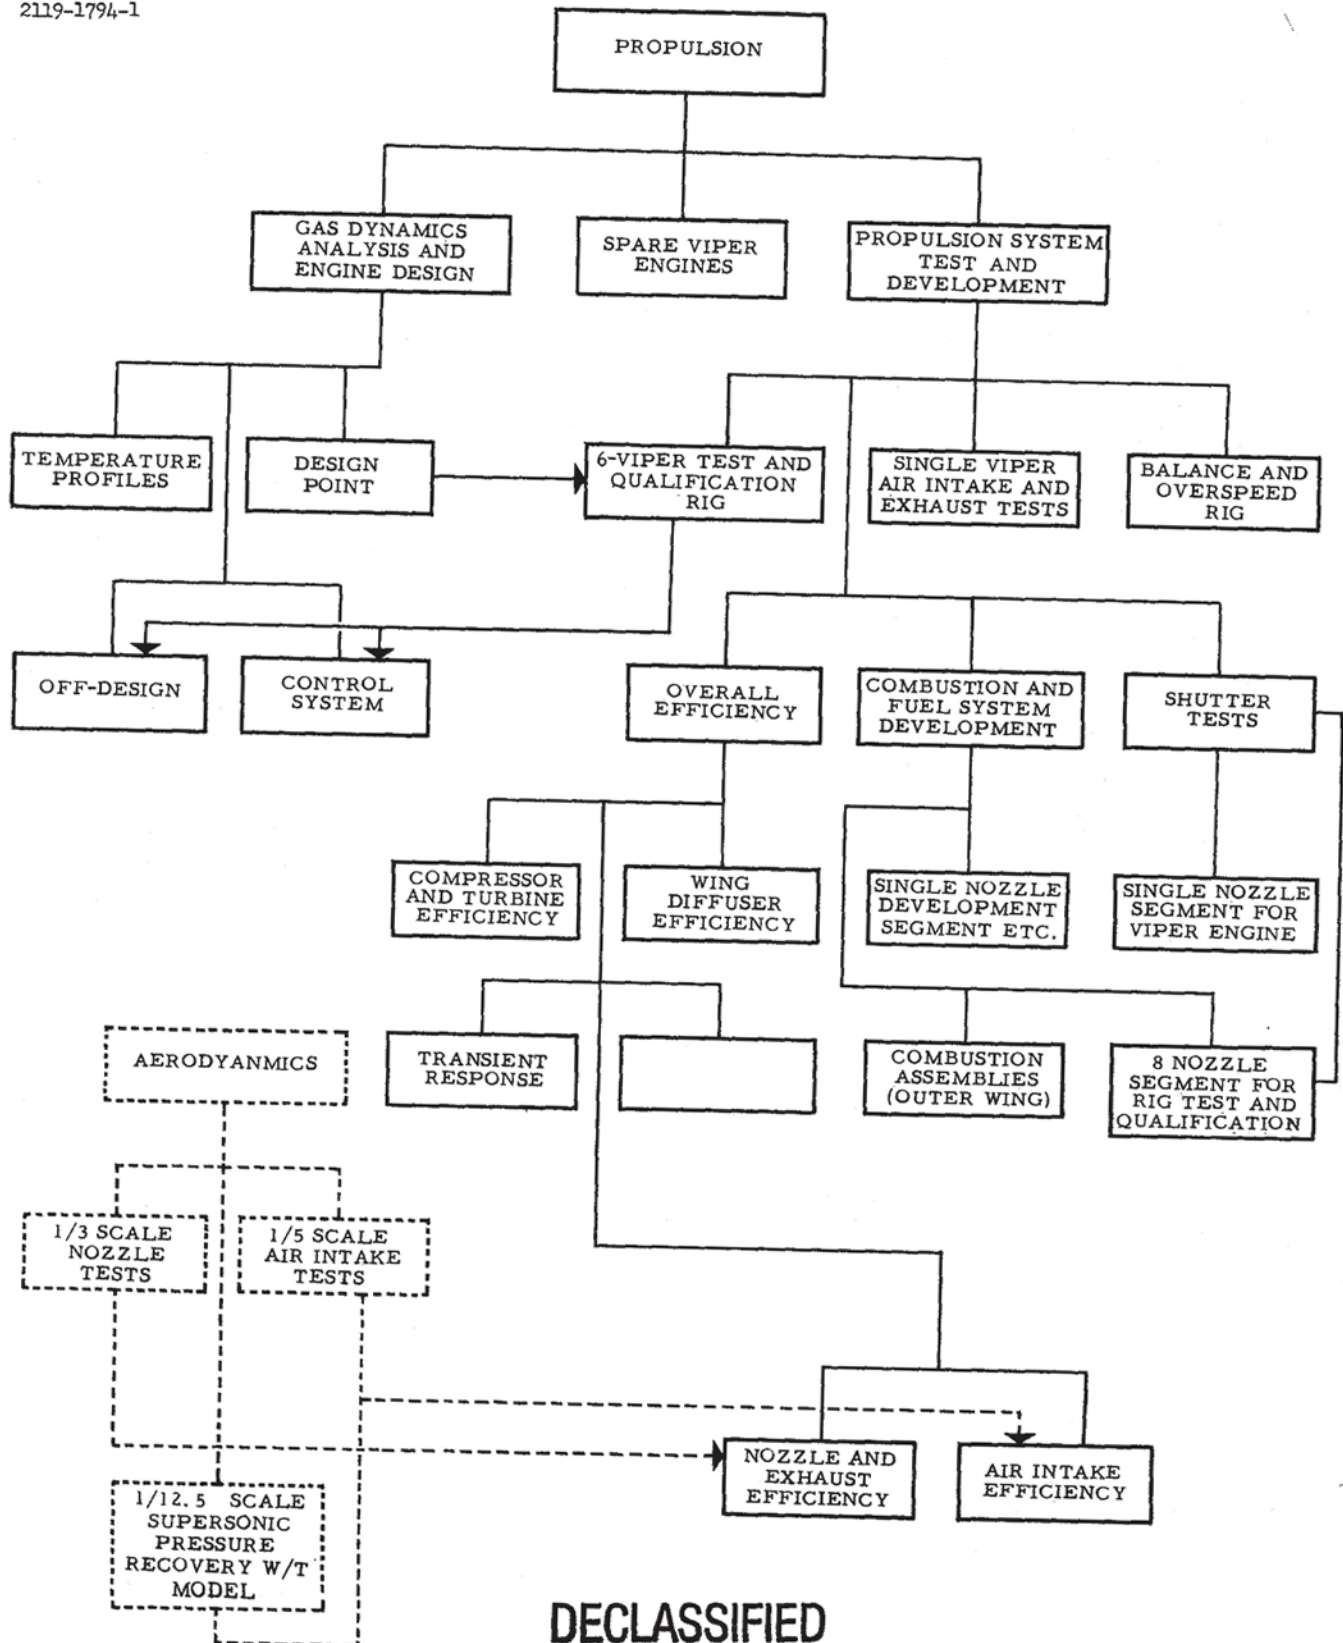

DECLASSIFIED

FIG. 45 WORK CHART- PROPULSION

SECRET

[illegible]

FIG. 46 WORK SCHEDULE CHART-PROPULSION

~~SECRET~~

DECLASSIFIED

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

Statement
of Work
Sub Parts
1.1.8

6. STABILITY AND CONTROL

As stated in the Introduction, pitch stabilization through the controls is essential in this aircraft and the change in jet direction as the aircraft pitches performs the same function as the fixed stabilizer on a conventional aircraft. In order that the significance of the work proposed in this section may be fully appreciated a brief explanation of the central stability problem and description of the proposed stabilizer is given here as follows:

The aircraft centre of gravity is in the middle whereas the neutral point for the wing varies from approximately 20% to 45% of the root chord, depending on Mach No. and angle of attack; and thus with controls fixed the aircraft is statically unstable. At high subsonic speed in particular, where the negative margin is greatest, a pilot would not be able to operate the controls quickly enough to balance the aircraft and keep it from pitching up out of control; and a stabilizing mechanism with a much faster response is required to operate the controls instead; leaving the pilot with a monitoring control, which will effectively set the attitude the stabilizer is to work to, and thus determine the flight path.

The stabilizing mechanism proposed is illustrated by the diagram of Fig. 49. The controlling element, the shutters in the exhaust ports, is a servo, since it only requires a small effort to move them, and this produces a large force on the aircraft by re-directing a powerful jet; thus it will be possible to get large changes in pitching moment very much faster than would be possible if the moment were produced by moving a heavy elevator.

The shutter position is controlled by a pneumatic jack which holds the shutter closed to a given angle against the pressure inside the wing. The pressure in the jack is determined by the stabilizer, which thus sets the shutter angle and main jet efflux, altering the top and bottom differentially i. e. as the upper is closed the lower will open and vice versa.

The pressure to the jacks controlling the pitching shutters is made to depend on the angle of attack and forward speed, and on the rate of pitch of the aircraft in the following manner:

DECLASSIFIED

SECRET


DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

2136-1794-1

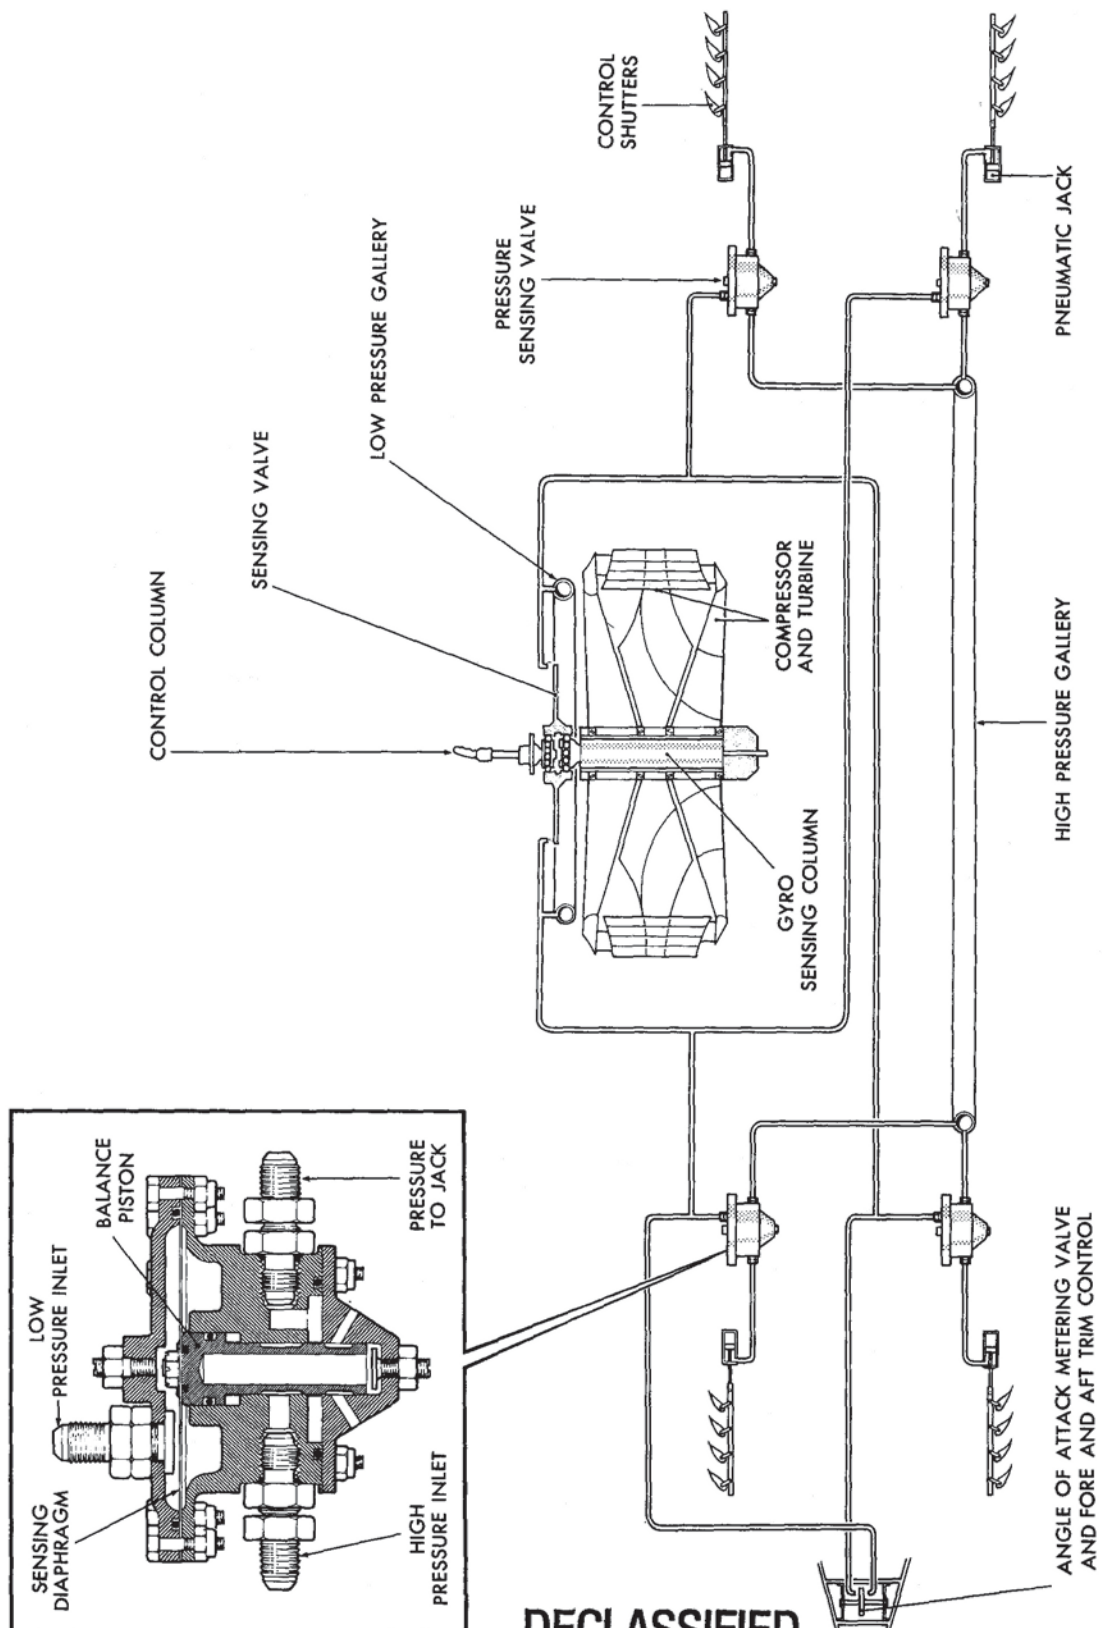

DECLASSIFIED

FIG.49 SCHEMATIC OF SHUTTER CONTROL SYSTEM

SECRET

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

if the angle of attack changes the pressure differential between the top and bottom of the wing will alter to move the diaphragm (shown in Fig. 49) and thus alter the leak and change the sensing lines' pressure; and also because if the aircraft is pitching the main rotors will precess towards each other (since they are contra-rotating) and in straining the main mounting shaft will rock the sensitive plate shown in the diagram and similarly change the sensing lines' pressure.

The sensing lines' pressure does not operate the shutter jacks directly but is fed to the amplifier valves, one of which is shown sectioned in the upper left of the diagram. The purpose of these valves is to control the high pressure (0 to 1000 psi) jack operating air according to the low pressure (0 to 30 psi) air fed to it by the sensing line.

In order to control the aircraft attitude it is only necessary for the pilot to bias the sensing line pressure by means of the cockpit control stick and the aircraft will respond, without of course, interfering with the action of the stabilizer to control any deviations from the new attitude demanded - by itself making further changes in the sensing line pressure.

6.1 Analysis

The principal effort under this head will thus be concentrated on the analysis of flight characteristics of the prototype vehicle using data from wind tunnel and control system component performance tests. These studies may be considered under the following heads.

6.1.1 In-flight Characteristics

Considerable data already exists on the subsonic aerodynamic control characteristics in the 'in-flight' configuration: data on the control characteristics at supersonic speeds is however sparse and at transonic speeds non-existent and further tests under these heads have been proposed in Section 4. These will be combined with the measured transfer function of the control system to produce the overall in-flight characteristics of the aircraft over the entire range of speed and altitude. In the proposed program there will still be no direct data on the aerodynamic and control characteristics in roll and yaw but it is nevertheless believed that the vital problem is that of satisfactory stability and control in pitch and estimated values will suffice for the former.

DECLASSIFIED



6.1.2 Hovering and Transition

Considerable further data on the aerodynamic and control characteristics in the hovering and transition phase are required and further tests for this purpose have been described in Section 4.

Results of these tests, it is hoped, will be available by the time reliable frequency response data on a fully representative shutter test has been obtained and a thorough analysis of the stability and control in the hovering and transition phase will be made as soon as they are available.

6.1.3 Flight Limitations

The flight limitations imposed on the aeroplane by the available control power will be re-examined in the light of further supersonic and also transonic tests and with consideration of the effects of control system transfer function on gust response.

6.1.4 Stall and Post-stall

In view of the possibility of inadvertent or unavoidable 'forced-stall' where control power is at a minimum or if gust consideration combined with control response should prove critical, careful integration will be made of the motion of the aircraft through such manoeuvres. Particular attention must be paid to the maximum normal acceleration experienced by the aircraft and the length of time for which high 'g' is sustained.

6.1.5 Safety and Reliability

Since control of the aircraft, at least at moderate to high subsonic speeds, is completely dependent on the operation of the stabilizer, it is clear that a degree of reliability as good as that of a conventional powered flying control system must be provided. It is for this reason that the pneumatic system with entirely mechanical components has been chosen; and functional tests to develop the shutters to the required integrity will be carried out on the rigs discussed in Section 5.2.5. The stabilizer elements will be added to these rigs and to the original shutter rig as subsequently explained in Sections 6.2.2, 6.2.3 and 6.2.4 and similarly developed. Additionally, studies will be made of the failure characteristics of the system and sufficient duplication will

DECLASSIFIED



be provided where inadequate operational envelopes are found to exist with the limited control remaining after failure. The requirements of specification MIL-8785(ASG) will be followed as far as they are applicable.

6.1.6 Increase of Static Margin

Study will also be afforded toward the possibility of reducing the static instability of the basic aircraft by means of significant change in the centre of gravity and possibly by limited alterations to the planform, whose effects can be readily determined without recourse to detailed design study.

6.2 Tests

Apart from wind tunnel tests to determine control characteristics, certain other tests specifically to determine control system component performance and stability behaviour are visualized as follows:

6.2.1 Unit Development

The first problem encountered is that of developing satisfactory functioning of the cockpit valve, angle of attack signal input valve, signal mixing, pressure control valve and shutter jack units.

Static tests are in progress to develop satisfactory functional performance and linear response on these various items.

6.2.2 Frequency Response Rig No. 1

A rig for measuring the frequency response characteristics of an approximately representative pneumatically controlled shutter system has already been constructed and is illustrated in the photograph of Fig. 50 and the schematic perspective of Fig. 51.

Tests will be carried out on this rig with the latest system components at the earliest practicable stage of development (as above), with representative control runs, to get the earliest possible idea of the control system transfer function. Instrumentation will consist of linear transducers at oscillator input and shutter output with pressure transducers at suitable points in the system, together with a strip recorder.

DECLASSIFIED

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

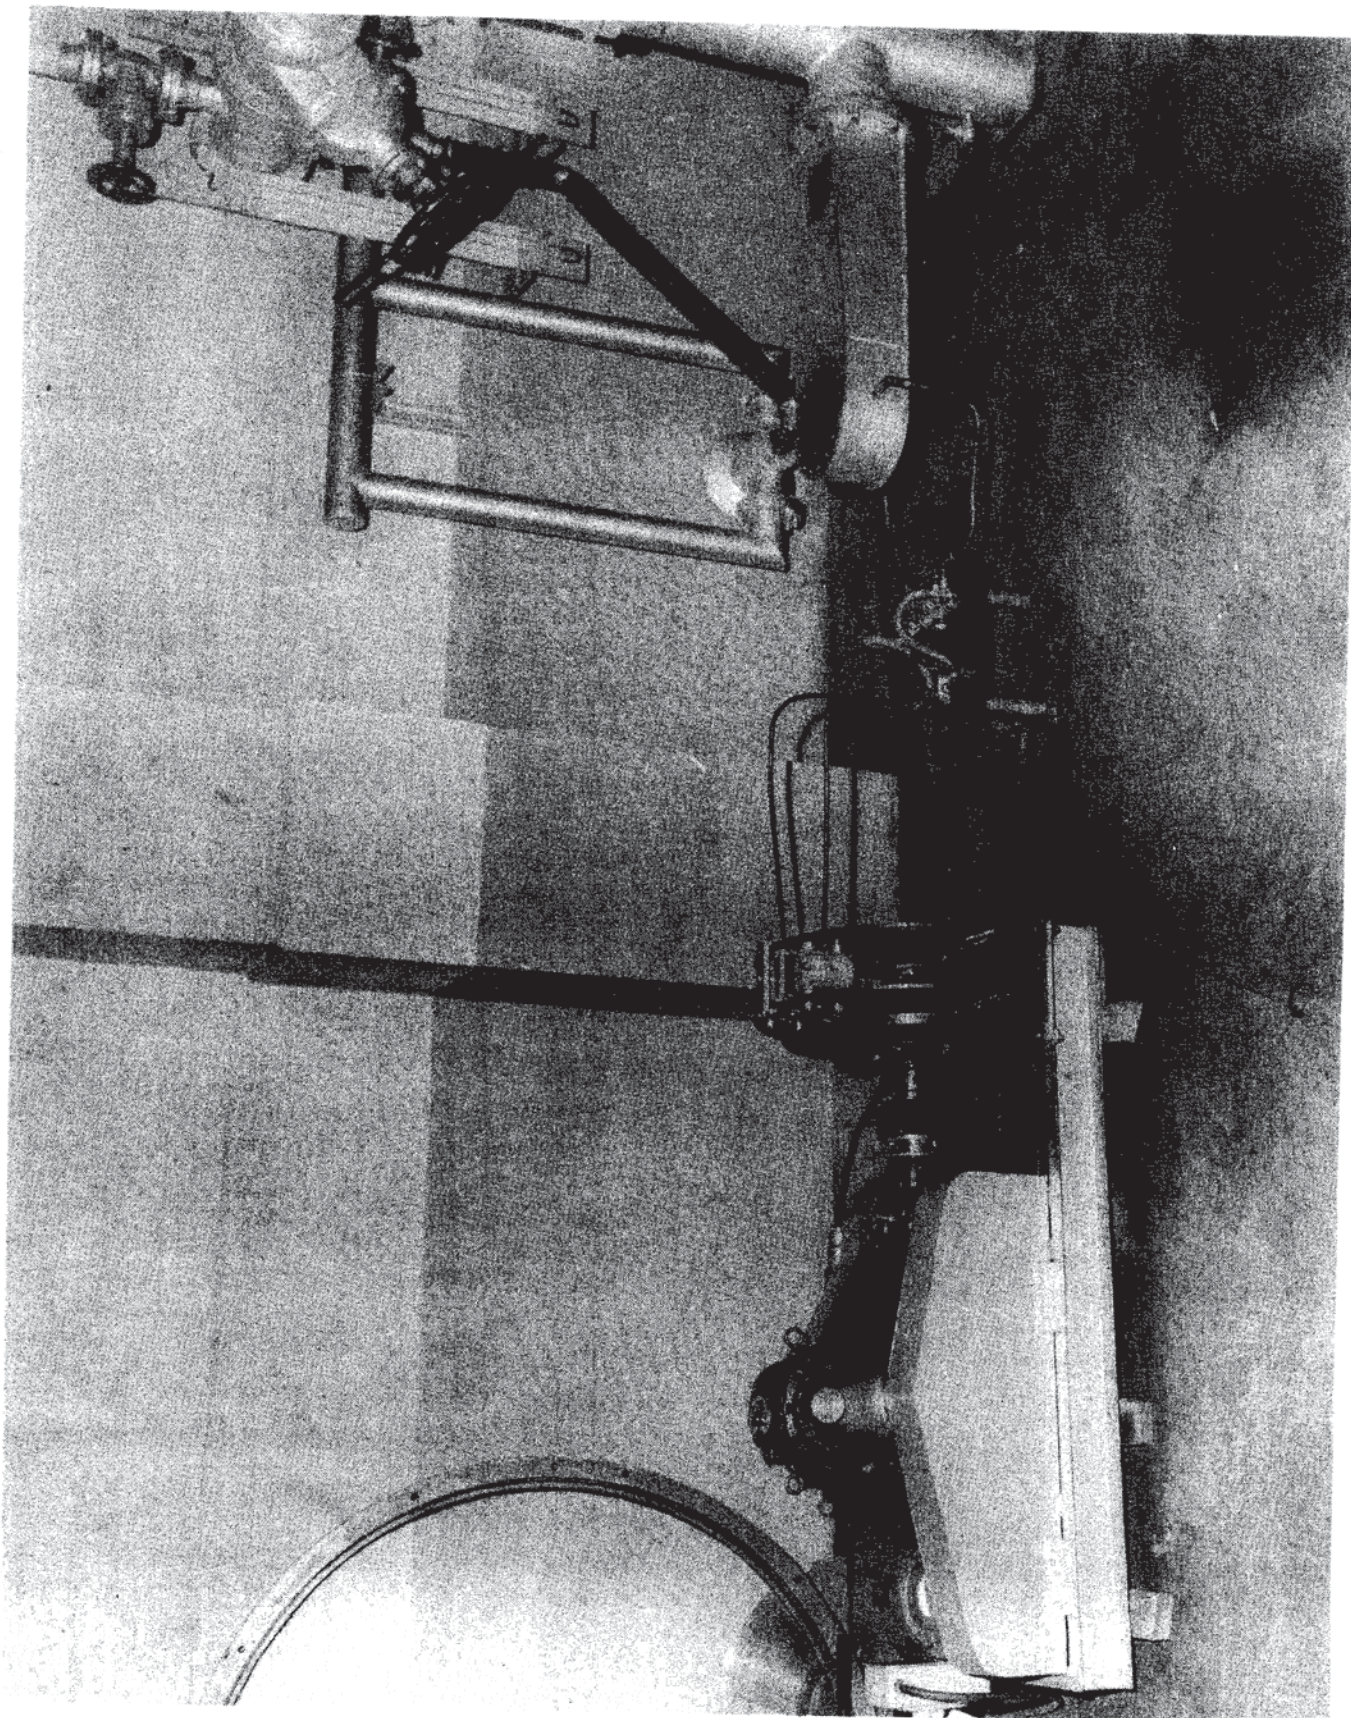


FIG. 50 FREQUENCY RESPONSE RIG NO 1

DECLASSIFIED

~~SECRET~~

DECLASSIFIED

PROJECT 1794


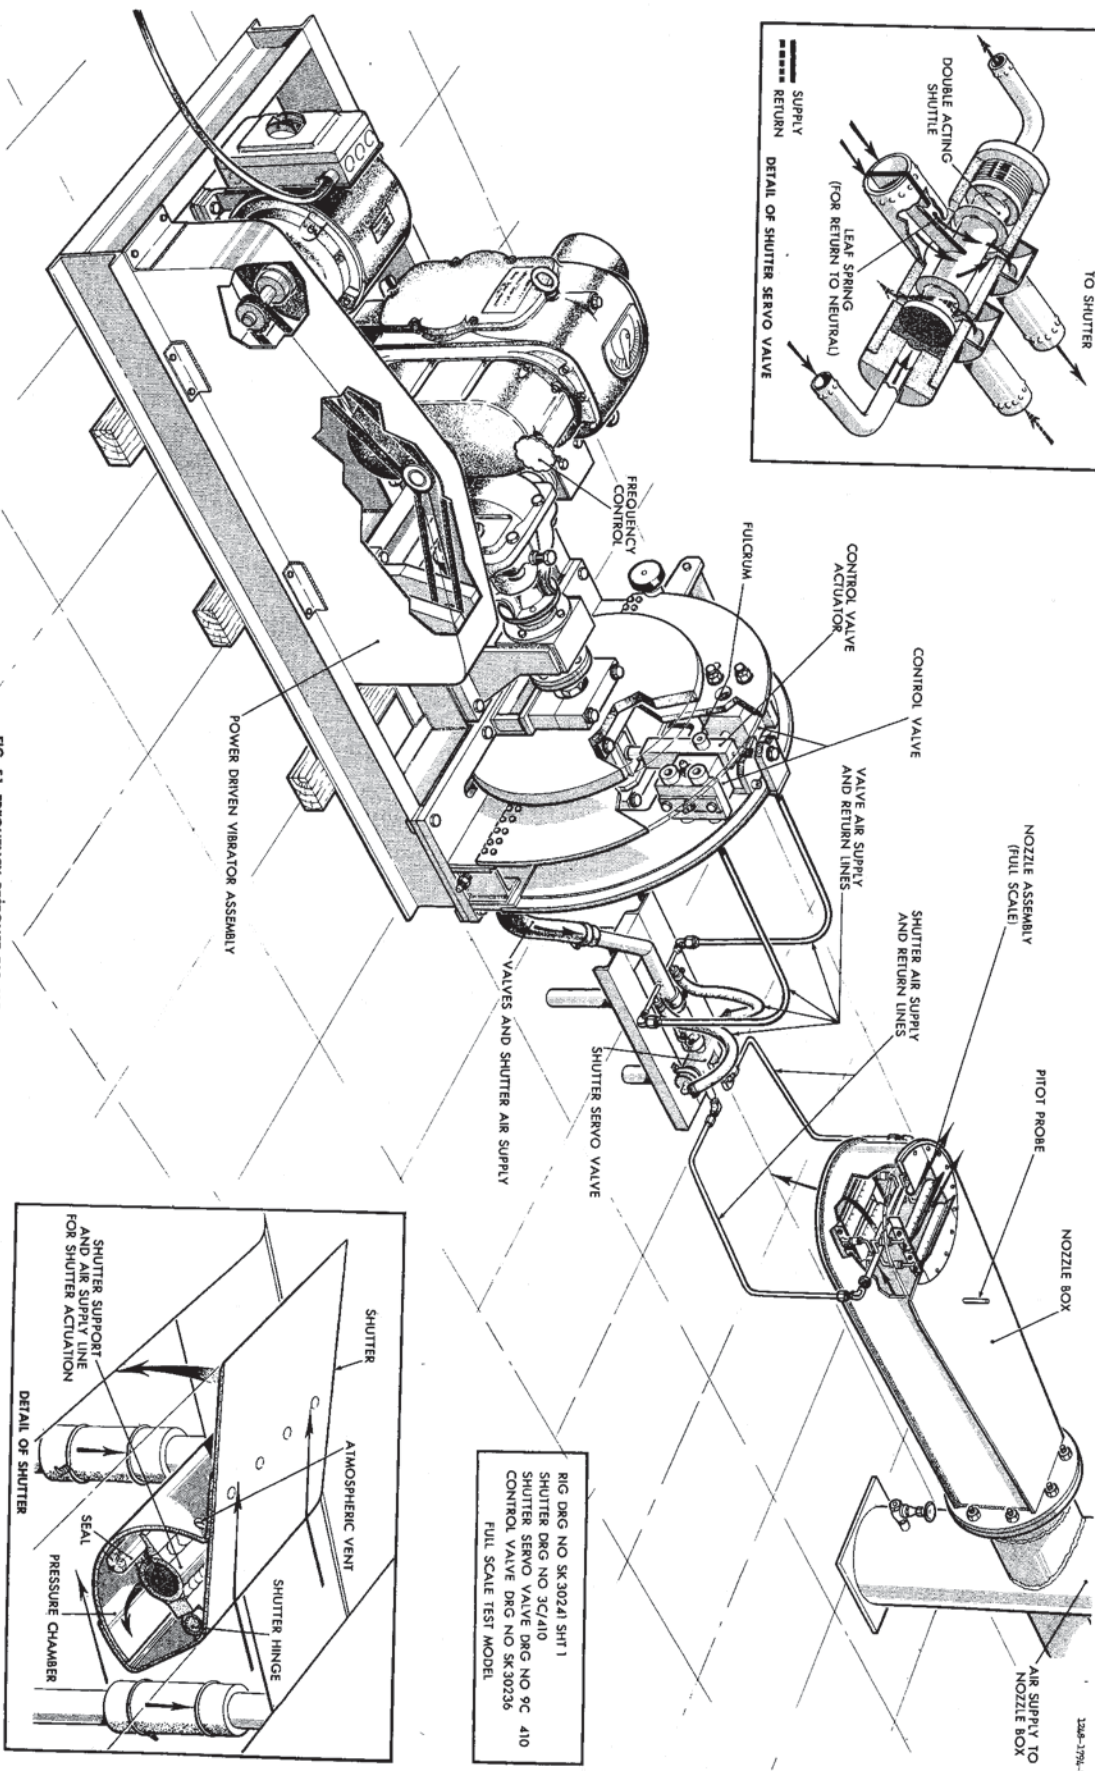


FIG. 51 FREQUENCY RESPONSE RIG NO. 1

SECRET

DECLASSIFIED

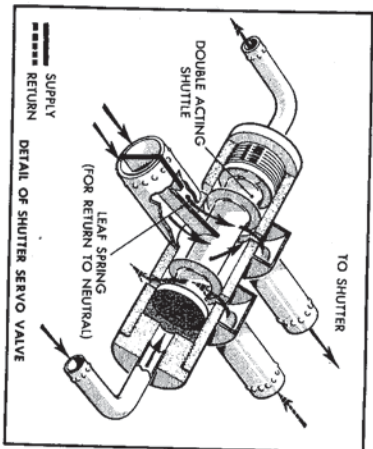

The effect of varying the moment of inertia of the shutters will be investigated.

6.2.3 Single Nozzle Segment Frequency Response Tests

Frequency response tests will then be carried out on the single nozzle segment described in Section 5.2.5.1 to obtain control system transfer function for a completely representative set of shutters at the earliest possible date. Control lines, valves, etc. will be as representative as possible.

6.2.4 Eight Nozzle Segment Frequency Response

Control system transfer function will finally be checked on the 1/6th segment containing eight nozzles described in Section 5.2.5.2; with a complete pneumatic system installed as it will be on the aircraft including a control column to which an oscillating input will be applied (see Fig. 44). Recordings will be taken of output of each of the separate pairs of shutters for the whole segment.

6.2.5 In-flight Mechanical Analog

In view of the importance and novelty of the mechanical stabilizer it is considered that every effort should be made to represent aircraft flight motions in a simulator which employs the actual components of the stabilizing system; at least those which are known to be possible causes of response delay.

A mechanical analog is visualized for tests of this nature which will employ the shutter box shown in Figs. 50 and 51. The proposed rig is illustrated by the sketch of Fig. 52. The aircraft is represented by a beam (fitted with shields) pivoted on the box and pitched by the impingement of the jet on this shield and by an adjustable spring representing an aerodynamic disturbing moment proportional to the angular displacement. This displacement is sensed by air bleed sensing lines representing the angle of attack valve. A rate gyro is mounted on the shield and its precession is again felt by air bleed sensing lines which represent the cockpit valve. The veritable aircraft system is then interposed between sensing points and shutters and thus a disturbance of the shield will be corrected by the jets in a truly analogous manner.


DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

2133-1794-1

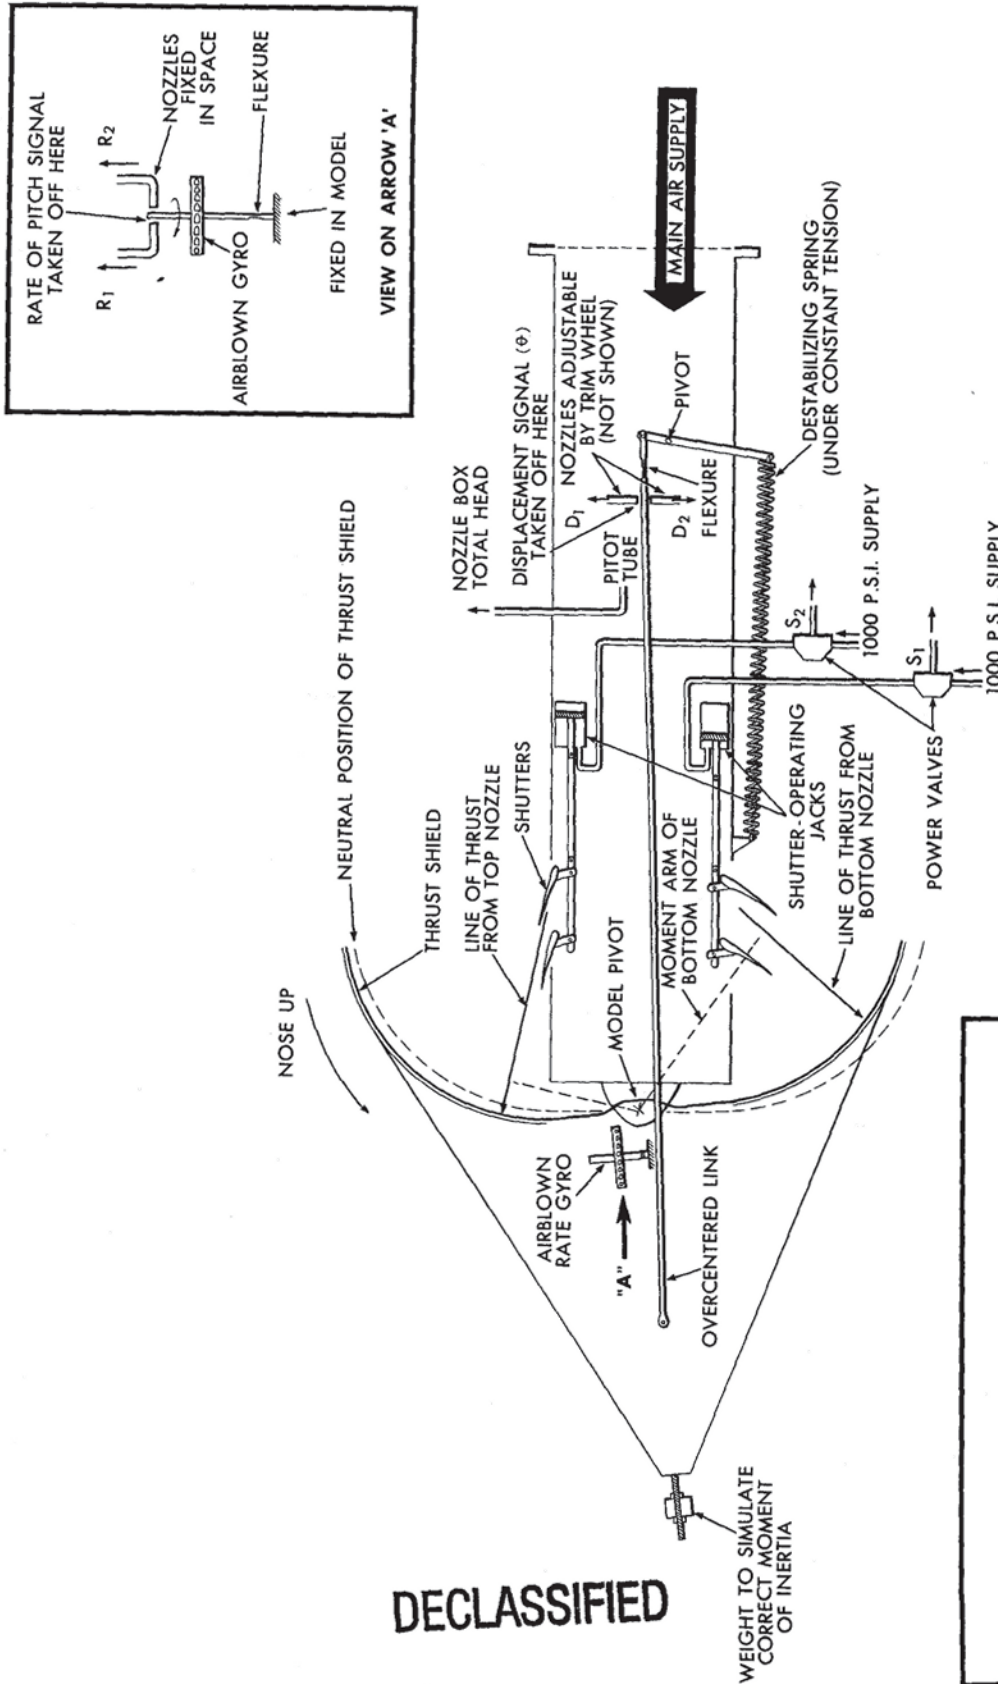

DECLASSIFIED

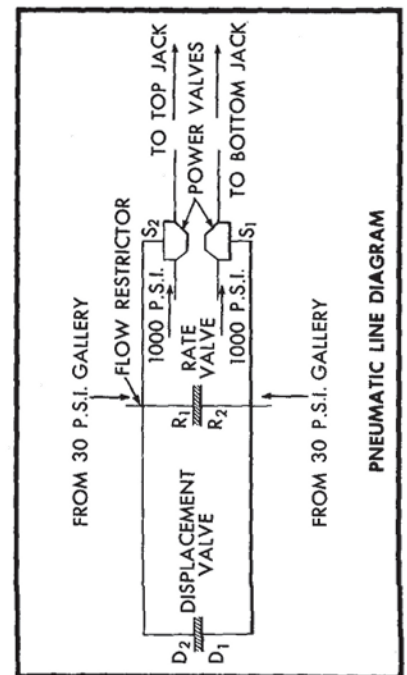


FIG.52 SCHEMATIC OF CONTROL SYSTEM MECHANICAL ANALOG

SECRET



Adjustments on the rig will be provided for varying the moment of inertia, spring tension and rate and displacement signal gains.

It will be appreciated that as presently conceived the rig is only in two degrees of freedom. In due course it may be possible to simulate angle of attack instead of angle of pitch, nevertheless it can be shown that for some important flight cases the difference is not sufficient to destroy the analogy. The rig will contain all the important time lags of the system and additionally simulates the aerodynamic lag of the jet force.

6.2.6 Hovering Analog

A similar analog to represent the motions of the aircraft hovering in the ground cushion is equally desirable.

However, in this case, it is the motions of the aircraft resulting from its proximity to the ground that are important and freedom in rise and fall as well as freedom in pitch and roll is desirable. Hovering simulation with control can be carried out by electrical analogy and it is planned to undertake a study of this nature as soon as more reliable control data in the ground cushion together with control transfer function have been obtained. At the same time it is thought worthwhile to attempt a mechanical analogy at an early stage with control and with a rate signal for artificial stability augmentation. This can be done with the existing ground effect rig of Fig. 28, if it can be shown that the reflected forces on the ground are sufficiently close to those on the aircraft for small motions; in which case a freely pivoted board can be made to represent the aircraft.

6.3 Work Chart Scheduling and Cost

The work chart of Fig. 53 on the following page illustrates the relationship of the items mentioned and the schedule of Fig. 54 will be seen to be inter-related with those of previous sections. Cost and manhour estimates are shown on pages 95-108

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

2118-1794-1

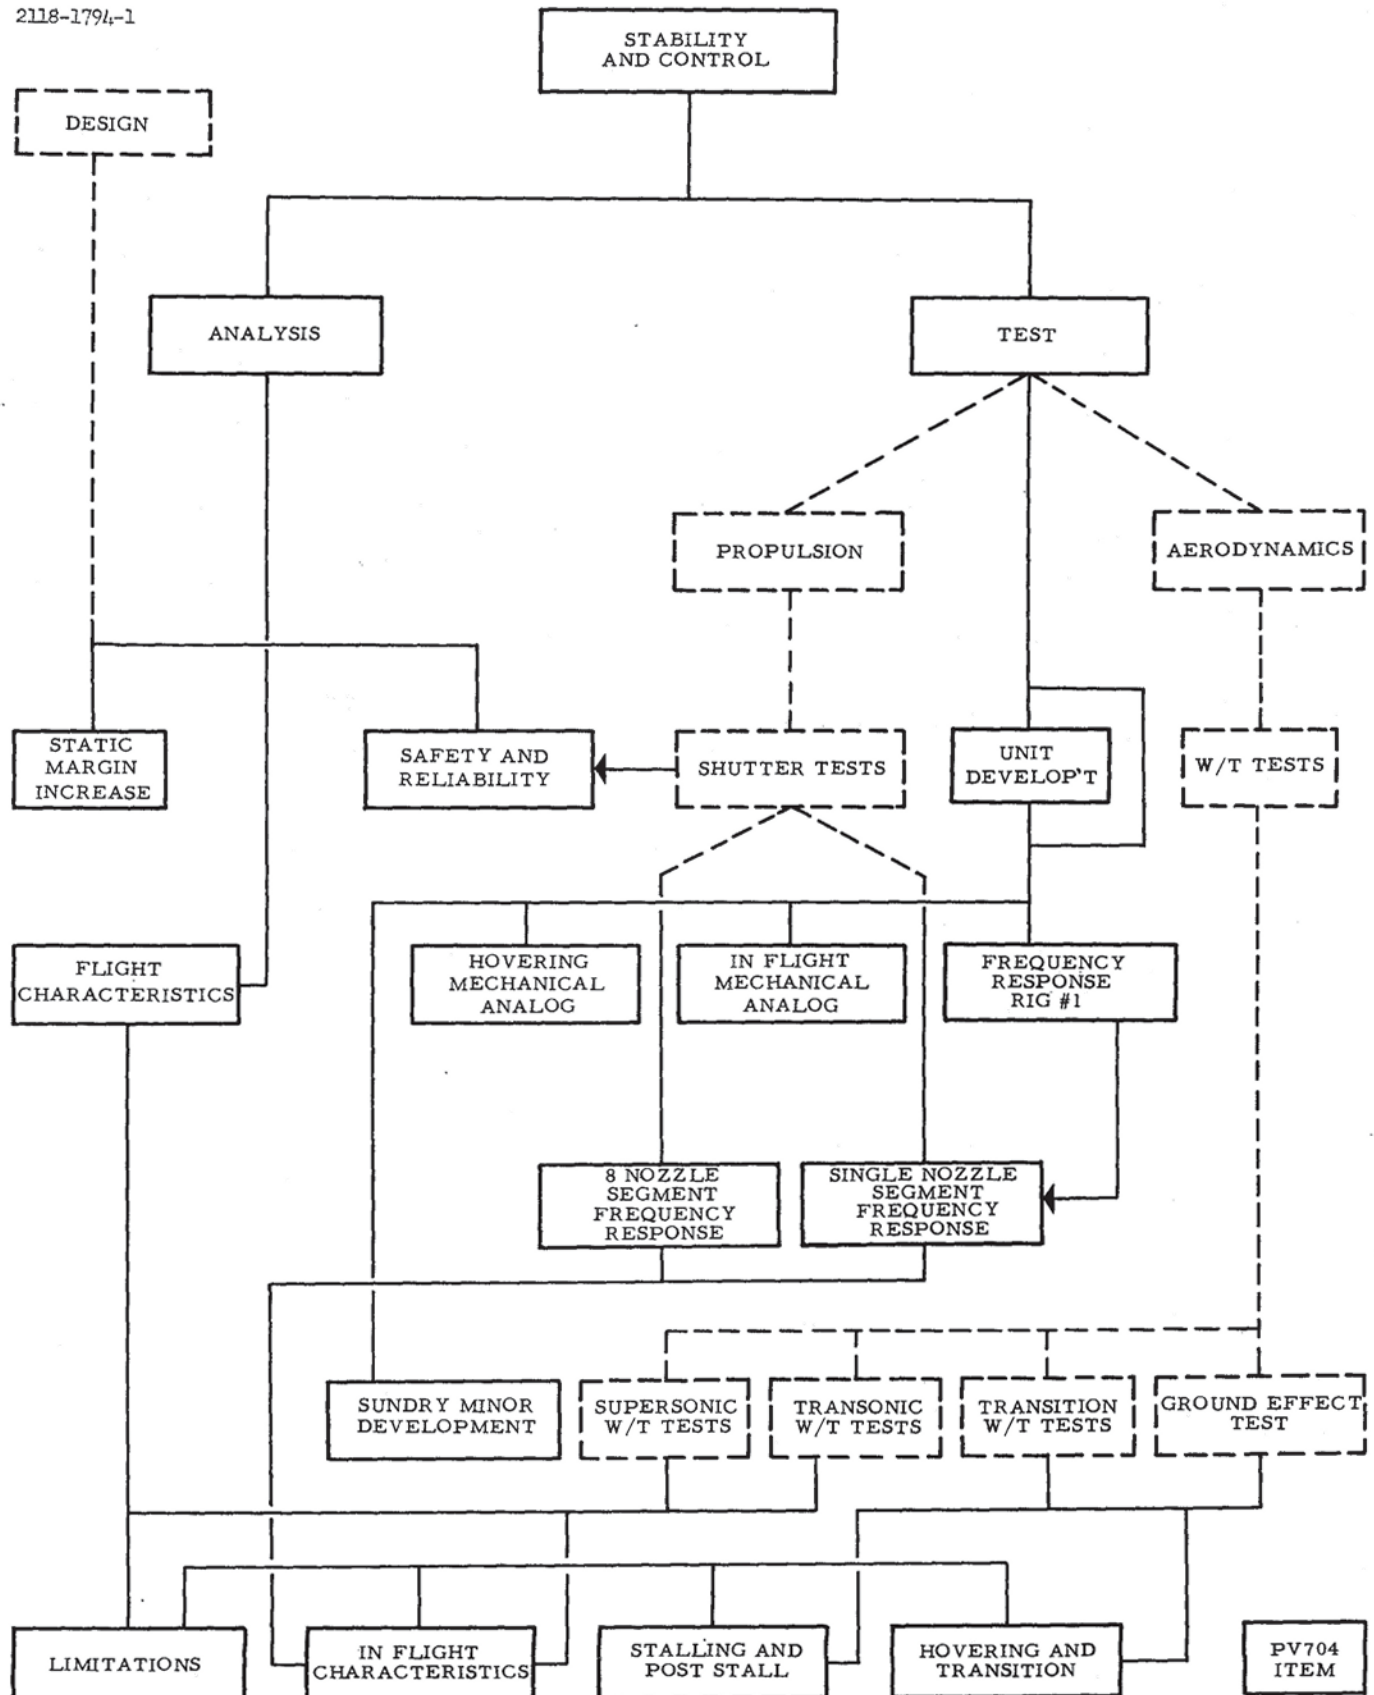


FIG. 53 WORK CHART-STABILITY AND CONTROL

DECLASSIFIED

SECRET

ITEM	TEST SPECIFICATION												DESIGN	MANUFACTURE												TEST	ANALYSIS												REPORT
	J	F	M	A	M	J	J	A	S	O	N	D		J	F	M	A	M	J	J	A	S	O	N	D		J	F	M	A	M	J	J	A	S	O	N	D	
P.V. 704 ITEM																																							
STATIC MARGIN INCREASE																																							
SAFETY AND RELIABILITY																																							
IN-FLIGHT CHARACTERISTICS AND LIMITATIONS																																							
HOVERING, TRANSITION, STALL AND POST STALL BEHAVIOUR																																							
UNIT DEVELOPMENT																																							
FREQUENCY RESPONSE RIG NO 1																																							
SINGLE NOZZLE SEGMENT RESPONSE																																							
EIGHT NOZZLE SEGMENT RESPONSE AND QUALIFICATION																																							
IN FLIGHT MECHANICAL ANALOG																																							
HOVERING MECHANICAL ANALOG																																							

2320-1794-2

1956

1957

1958

PROJECT 1794

FIG. 5.4 WORK SCHEDULE CHART-STABILITY AND CONTROL

SECRET

DECLASSIFIED



7. STRUCTURES

The prototype P.V. 704 aircraft is being designed to the July 1956 issue of ARDC M80-1. Stressing is in accordance with the applicable requirements of MIL-S-5700 through MIL-S-5711 and such other incidental requirements are as covered in ARDC M80-1.

Additionally the following design criteria are being applied:

- (a) The aircraft is being designed to a maximum normal acceleration of $\pm 10g$ at all speeds within the placarded flight envelope.
- (b) The aircraft is being designed to a maximum rate of roll or pitch of 3 radians per second.
- (c) The maximum differential pressure between the interior of the wing and ambient is limited to 10 lb./sq. inch.

This places a restriction on the maximum flight speeds that can be used at most altitudes and the limit is shown on the graphs of Figs. 42 and 43.

The work proposed under the heading of Structures may be itemized as follows:

7.1 Analysis

7.1.1 Strength and Stiffness of Research Aircraft

Because of the circular wing planform, intake arrangement and jet control, surface pressures are difficult to estimate for this aircraft and should be obtained from tests as proposed in Section 4. Results of such tests will not however be available for a considerable time and for preliminary analysis estimated values will be used.

The work chart of Fig. 57 illustrates the breakdown of analytical work planned for the research aircraft stressing, indicating the various structural units that may be considered separately and form the subject for separate reports.

7.1.2 Stress Analysis for Weapon System Study

In addition, as stated in Section 3, preliminary stress

DECLASSIFIED



PROJECT 1794

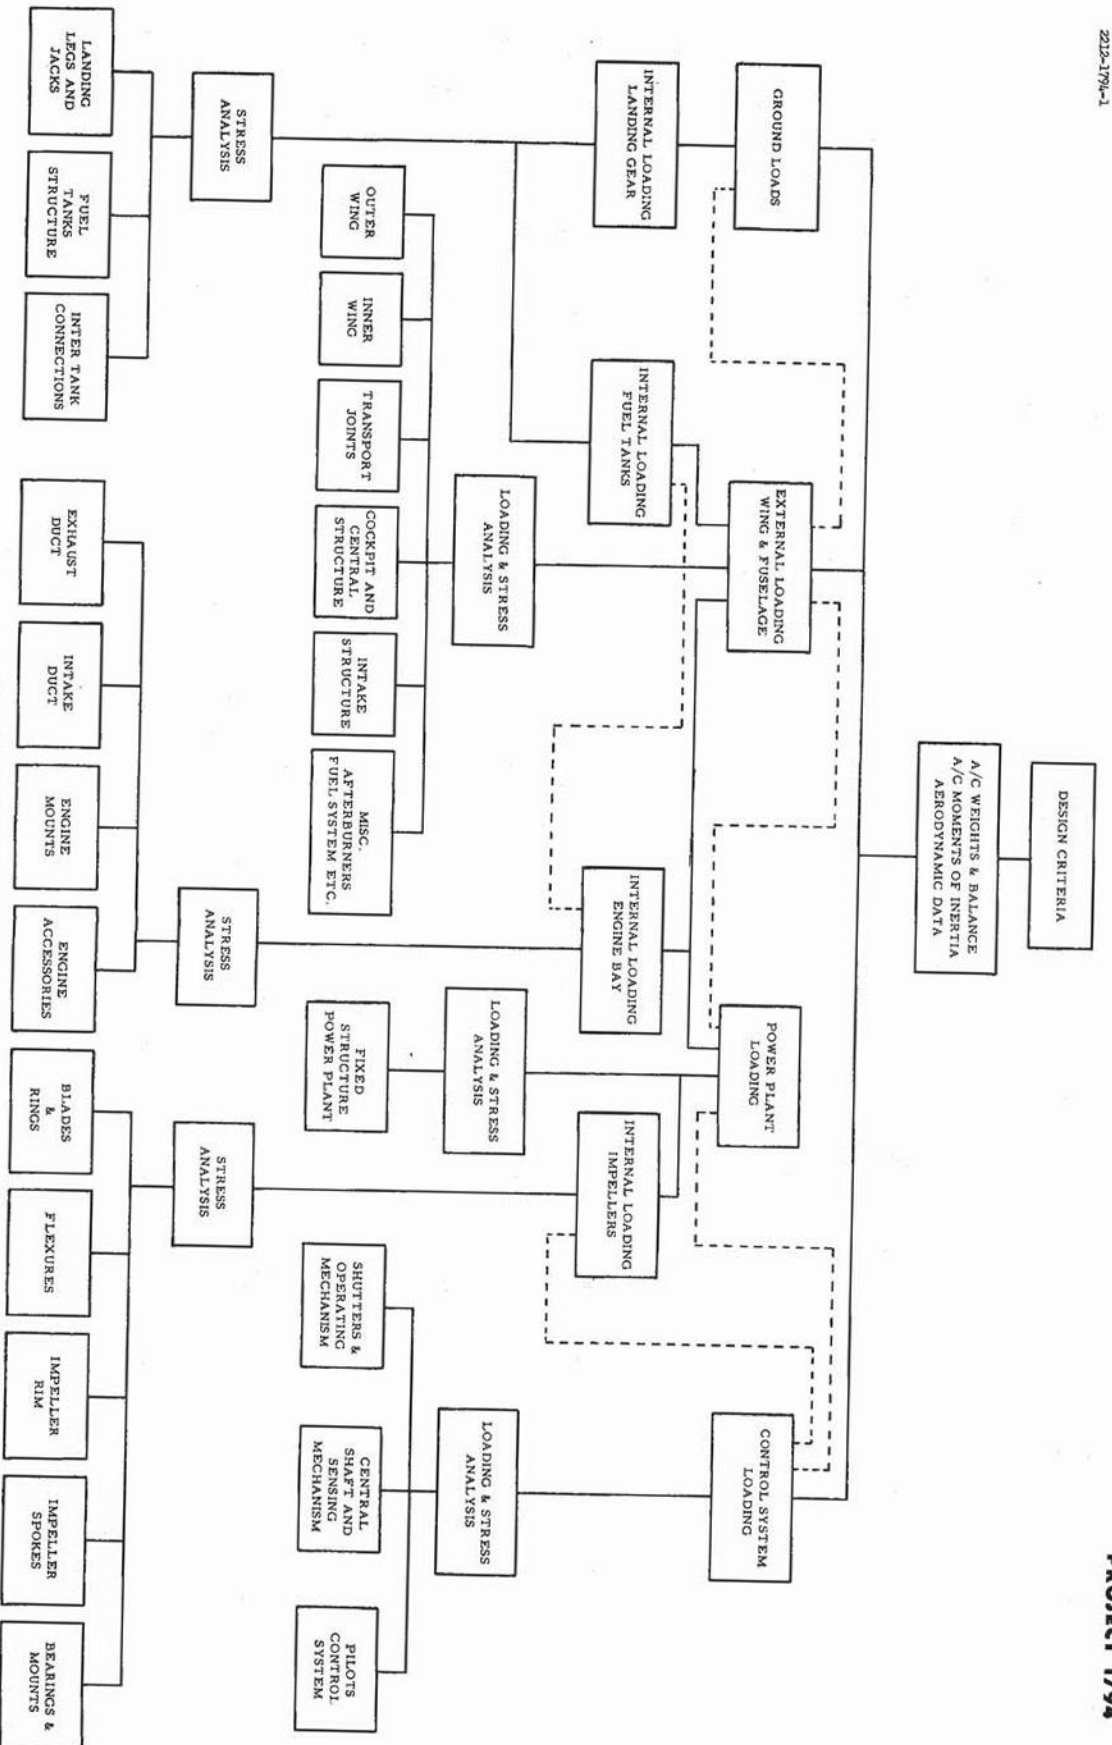


FIG. 57 PROPOSED STRESSING REPORTS FOR P.V. 704

44666666

DECLASSIFIED

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

analysis will be undertaken for the weapon system aircraft design study required with analysis of temperature effects. The work chart of Fig. 58 illustrates the approximate content of work visualized for this study.

7.1.3 Flutter, Vibration and Noise

A characteristic of low aspect ratio wings is that the modes of deformation of the wing due to periodic excitation cannot be reliably calculated, except for certain simple and idealized cases. The present structure of Project 1794 is not axially symmetric so that the same considerations apply and it is considered unlikely that an attempt to calculate the natural modes would yield useful results. It will therefore be necessary to carry out resonance testing of the entire aircraft configuration.

Although the modes of deformation can be so determined it is still necessary to determine the flutter derivatives and although these derivatives are known with fair accuracy for conventional wings, in that case they are derivatives of angular and linear displacement, based on the assumption of a rigid wing section. However it is clear that for a circular planform, the principal characteristic of classical flutter is the deformation of the wing section, a problem not previously investigated. In effect, the information required concerns the pressure distribution about the wing and its variation with deformation mode and frequency. Whereas theoretical estimates of the pressure distribution derivatives could be made it would probably be simpler to manufacture and test in a wind tunnel a model which is aerodynamically to scale and dynamically correct for the most important modes.

It is considered that even this would be a considerable undertaking which can hardly be justified at the present stage.

Thus it is felt that the best policy in this regard will be to first carry out shake tests on the complete prototype aircraft to determine both the modes of deformation and amplitude ratios at any important resonant frequencies that are found.


At this stage the possibility of constructing a wind tunnel flutter model will be considered.

DECLASSIFIED

~~SECRET~~

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

2213-1794-2

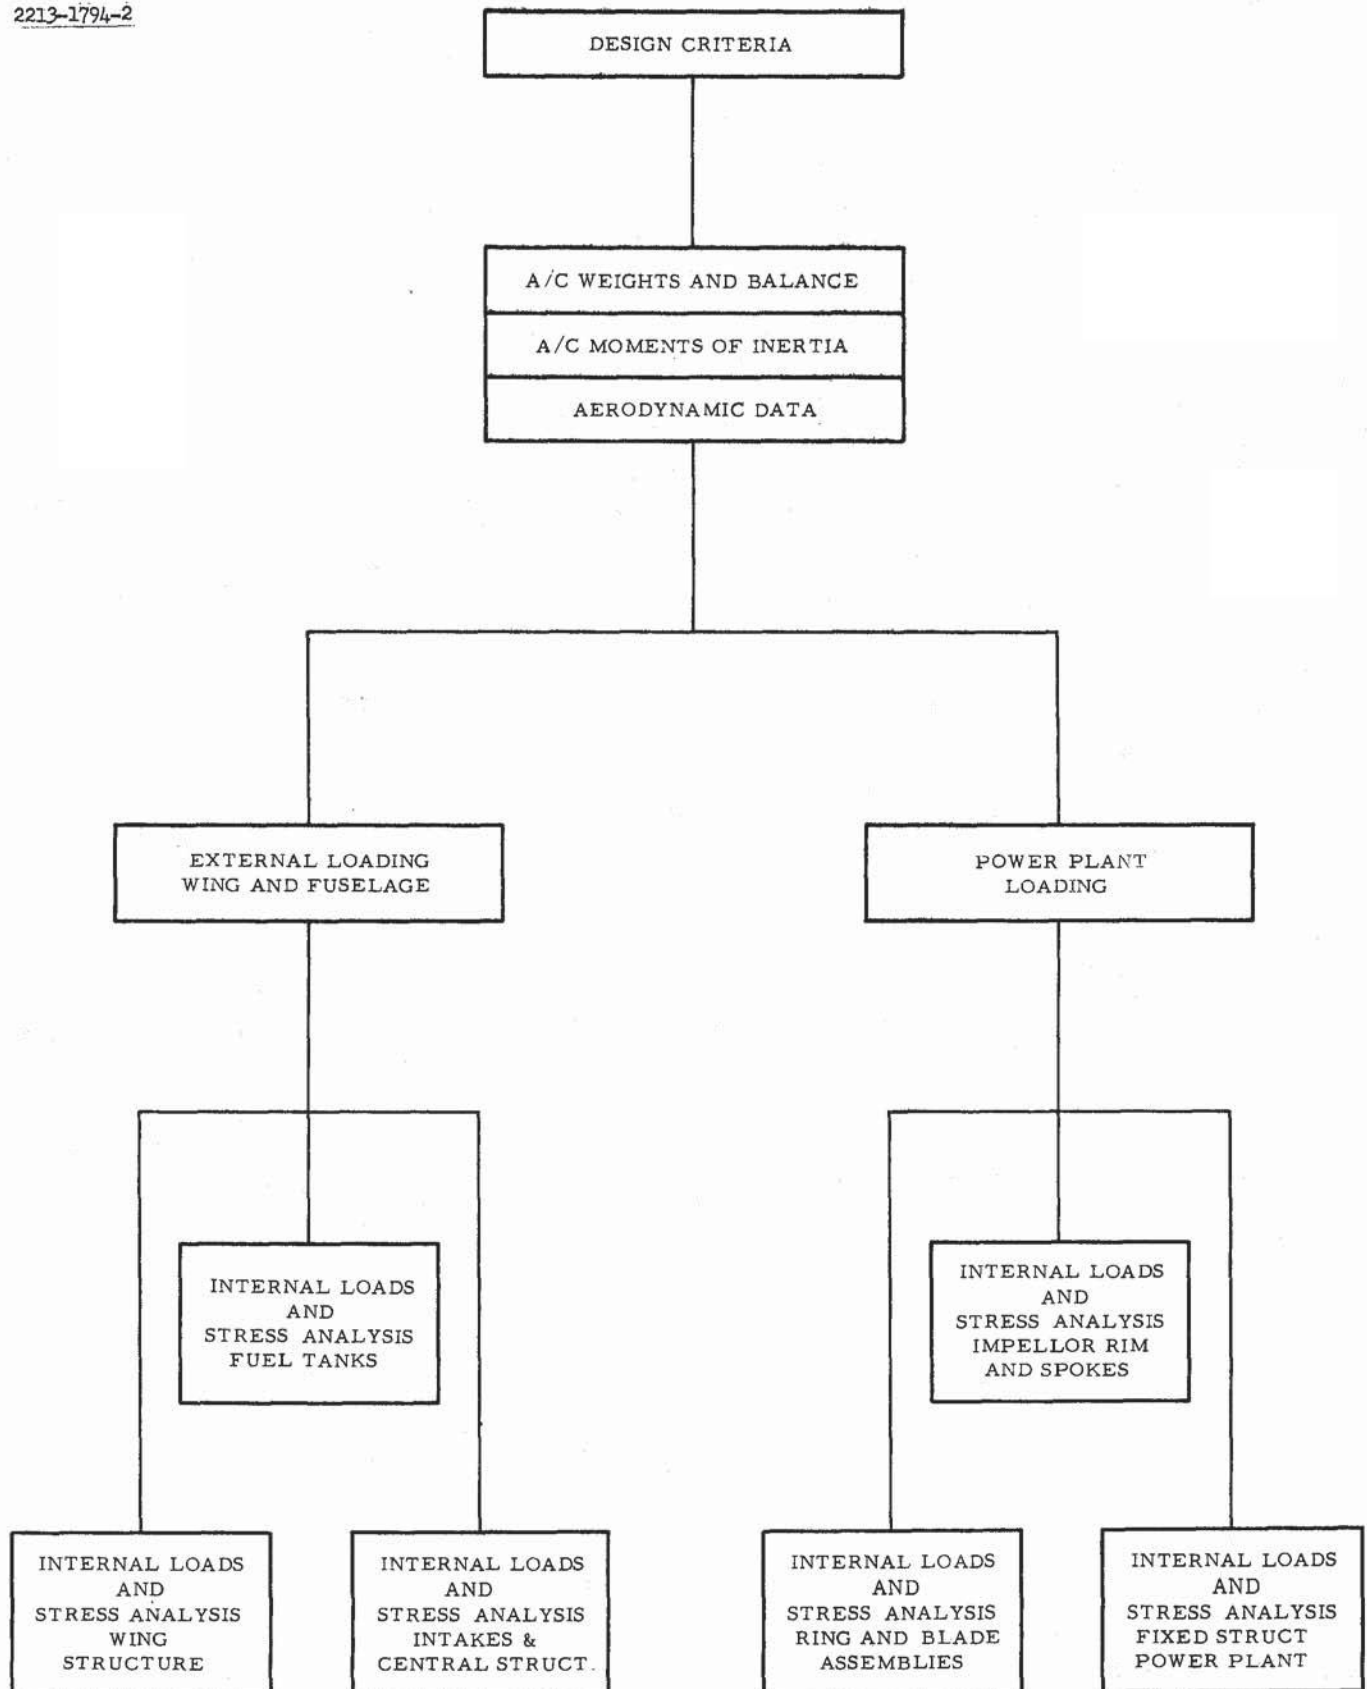


FIG. 58 PROPOSED STRESSING REPORTS FOR DESIGN STUDY

SECRET

DECLASSIFIED

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

A further possible cause of trouble appears to be that of fatigue failure due to high frequency vibrations set up by the flow within the aircraft itself and a vibration test and analysis will be carried out on the prototype aeroplane as soon as practicable by probing the structure at numerous points with the engine operating. Such analysis will include sound pressure level and frequency bands.

7.2 Tests

7.2.1 Aircraft Shake Tests

Shake tests of the completed prototype aircraft will be carried out as outlined above.

Apart from the central engine rotor the principal sources of vibration are expected to be combustor pressure pulsation and flow separation in ducts and behind the air intake. So far as is possible these will be investigated on the six Viper test rig, and during combustion development, in order that the general order of the forcing frequencies will be known when resonance testing the first aircraft.

7.2.2 Vibration and Noise Measurement

The purely resonant phenomena such as blade and duct vibration will be investigated primarily on the first completed aircraft before flight trials commence, as outlined above. In the special case of the central turbine and compressors, individual blade resonance will be determined and provision can be made for strain gauging compressor and turbine blades as explained in Section 5, but present policy is to ignore vibration phenomena unless they cause structural failure.

Sound level measurements will be made on the completed prototype aircraft to determine the near, far and pilots' noise spectrum.

7.2.3 Strength Tests

Certain static tests to determine the strength and stiffness of selected critical items will be carried out, particularly directed at those parts of the structure which have to support a large differential pressure, e. g. the fuel tanks and outer wing panels. Other such tests of relatively minor nature will probably be required for the prototype.

DECLASSIFIED

SECRET

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

In due course, and before the prototype aeroplane can be flown to speeds at which high loads can be encountered large scale structural tests will be carried out, but this does not form part of the present program.

7.3 Work Chart Scheduling and Cost

A chart illustrating the work outlined in this section is presented in Fig. 59 and an approximate schedule is given in Fig. 60. Cost for the stress analysis required for the weapon system design study is covered in Statement of Work Sub Part 1.1.9 (reference Section 3 of this report).

DECLASSIFIED

SECRET


DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

2115-1794-2

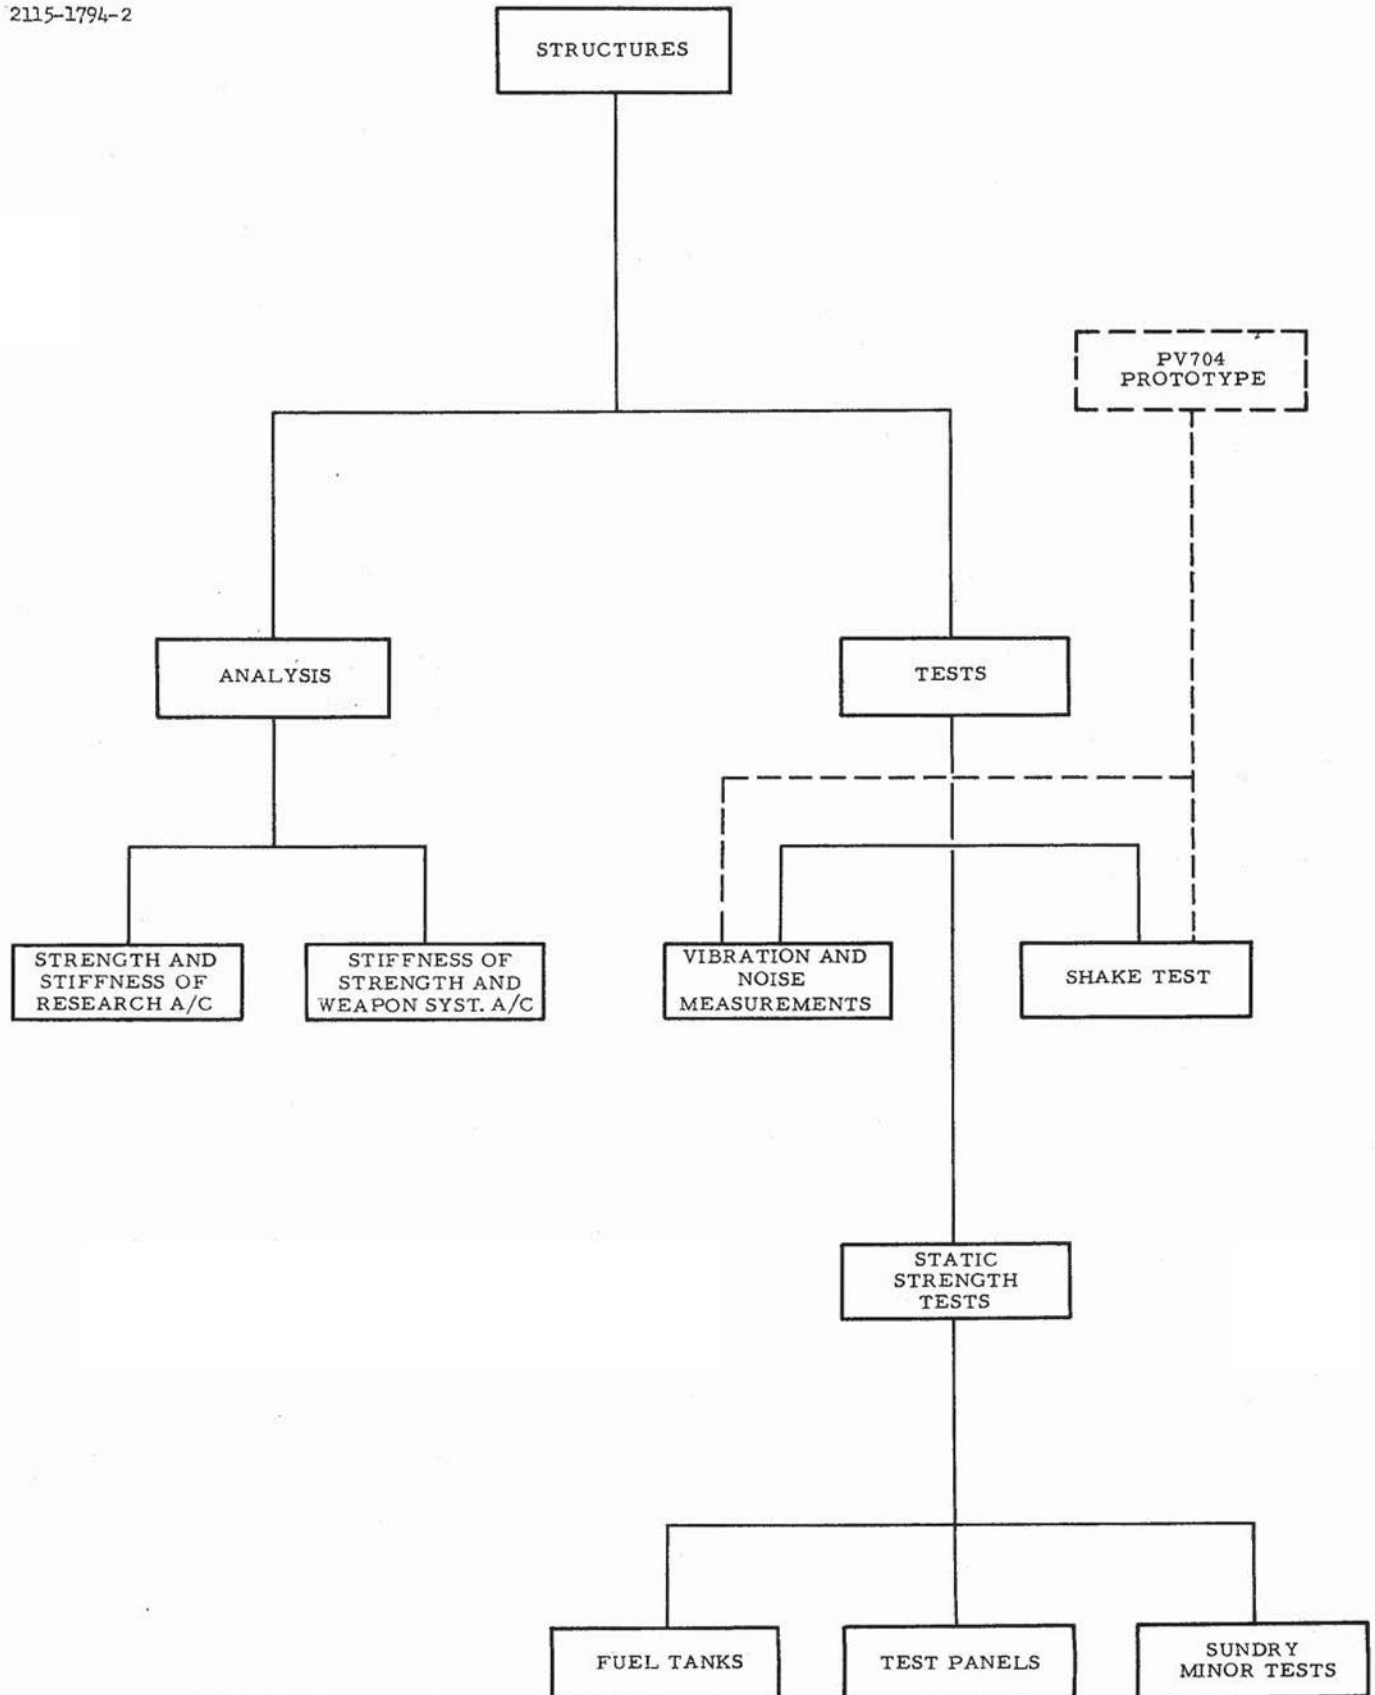

DECLASSIFIED

FIG. 59 WORK CHART-STRUCTURES

SECRET

DECLASSIFIED



PROJECT 1794


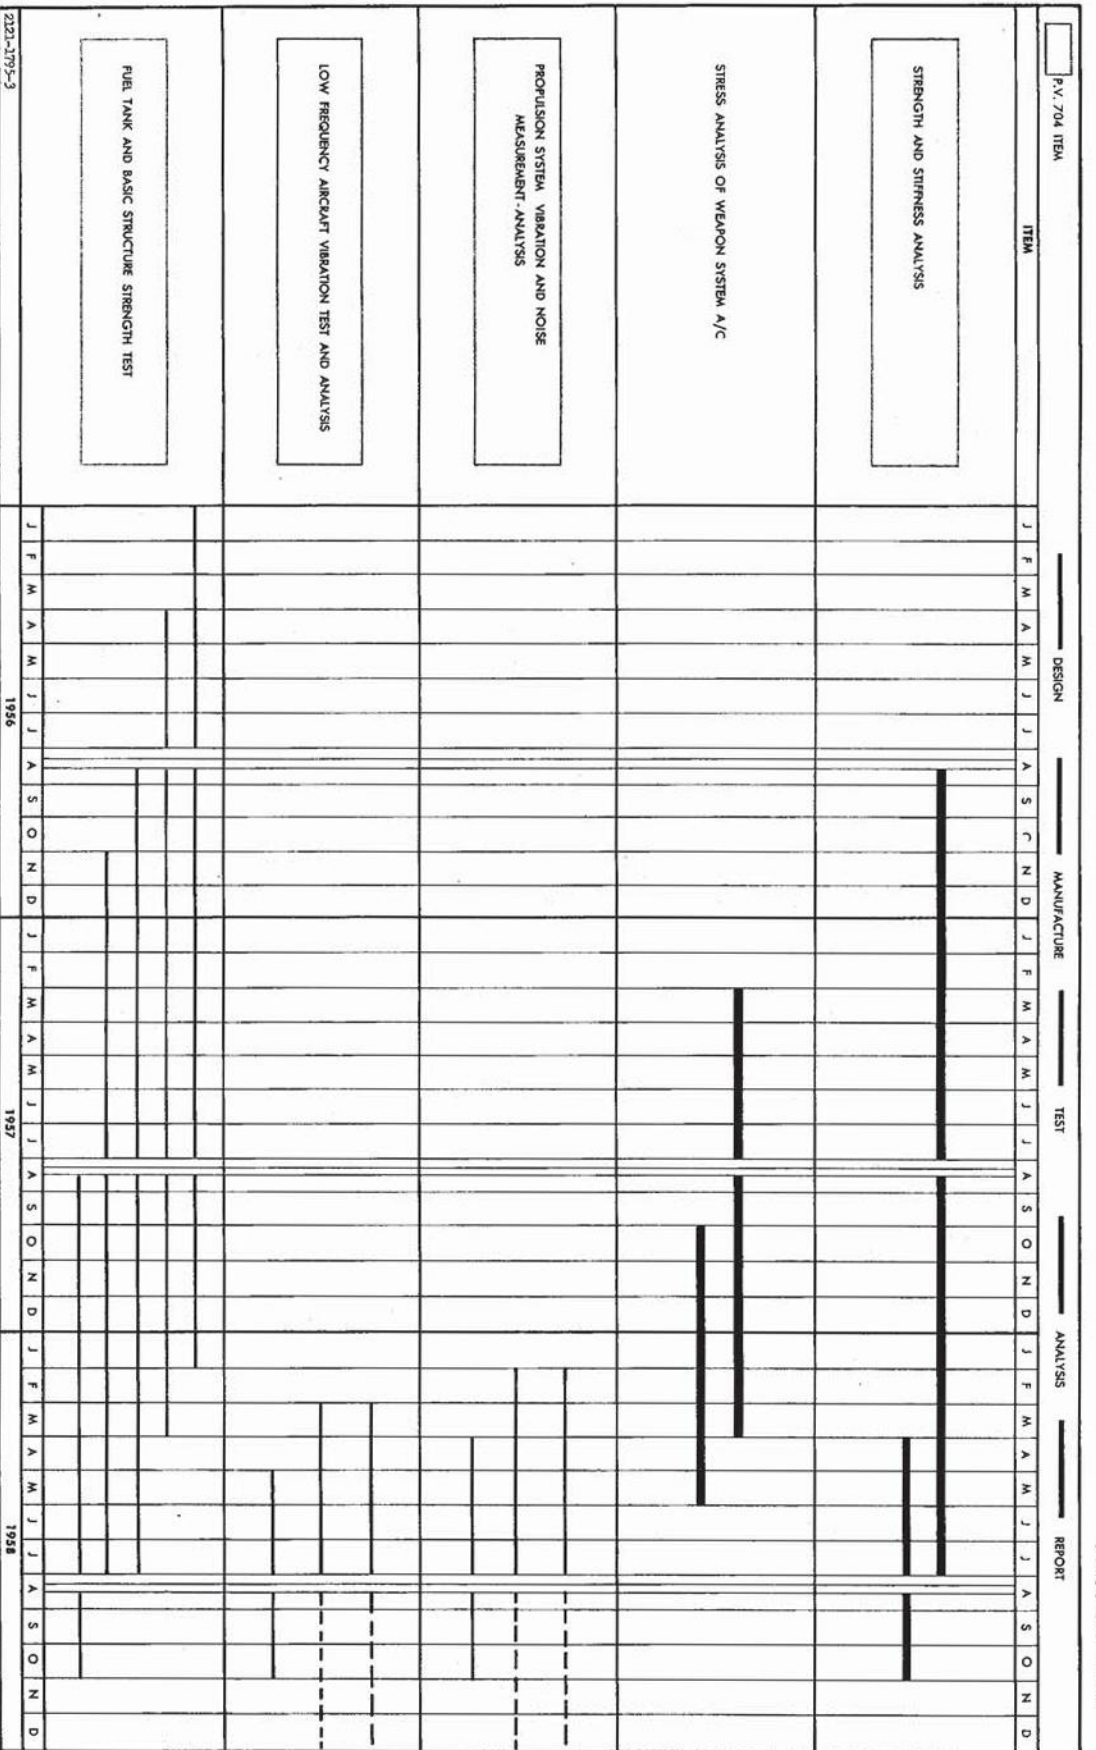


FIG. 60 WORK SCHEDULE CHART - STRUCTURES

SECRET

DECLASSIFIED



8. REPORTS AND CONSOLIDATED WORK AND COST CHARTS

8.1 Program Planning Report

Ten copies of this program planning report are now submitted to the Commander Detachment #1 Hq. ARDC, Attention: RDZSBA, Wright AFB, Ohio.

8.2 Test Specifications

Detail specifications of all tests outlined in the program planning report, including those which form part of the company sponsored program will be submitted to Hq. ARDC, Attention: RDZSBA. Test specifications for the USAF items will be submitted for approval in advance of tests. Test specifications will provide information on test objectives, facilities, model characteristics, test condition, instrumentation requirements, data collection and reduction etc. Test specifications will be furnished in accordance with the work schedule charts in this report (designated TS on the charts).

8.3 Bi-monthly Progress Reports

Ten copies of a bi-monthly progress report will be furnished by the twentieth day of the month following the reported two month period, representing a summary of: work performed, percentage of task accomplished, results obtained, problems encountered and the budgetary status of the program. These will be delivered to Hq. ARDC, Attention: RDZSBA.

8.4 Technical Reports

Six technical reports will be submitted as follows:

8.4.1 Summary Report

The summary report will contain -

- (a) An Introduction which includes historical background and statement of purpose of objectives,
- (b) Discussion of the design concept,
- (c) A presentation of important results,

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

- (d) An evaluation and interpretation of these results,
- (e) Conclusion and,
- (f) Recommendation.

8.4.2 Design and Performance

A design and performance report covering the work outlined in Section 3.

8.4.3 Aerodynamics

An aerodynamics report covering the work outlined in Section 4.

8.4.4 Propulsion

A propulsion report covering the work required by Section 5.

8.4.5 Stability and Control

A stability and control report covering the work outlined by Section 6.

8.4.6 Structures

A structures report covering the work outlined in Section 7.

25 copies of each of these technical reports will be furnished to Hq. ARDC, Attention: RDZSBA, by not later than October 31, 1958.

8.5 Consolidated Work and Cost Chart

Fig. 65 is a consolidated work chart for all the work outlined in this report, indicating the tie-in between the USAF and company sponsored program, while estimates of costs and manhours are shown on charts and tabulated lists on pages 95-105.

DECLASSIFIED

SECRET

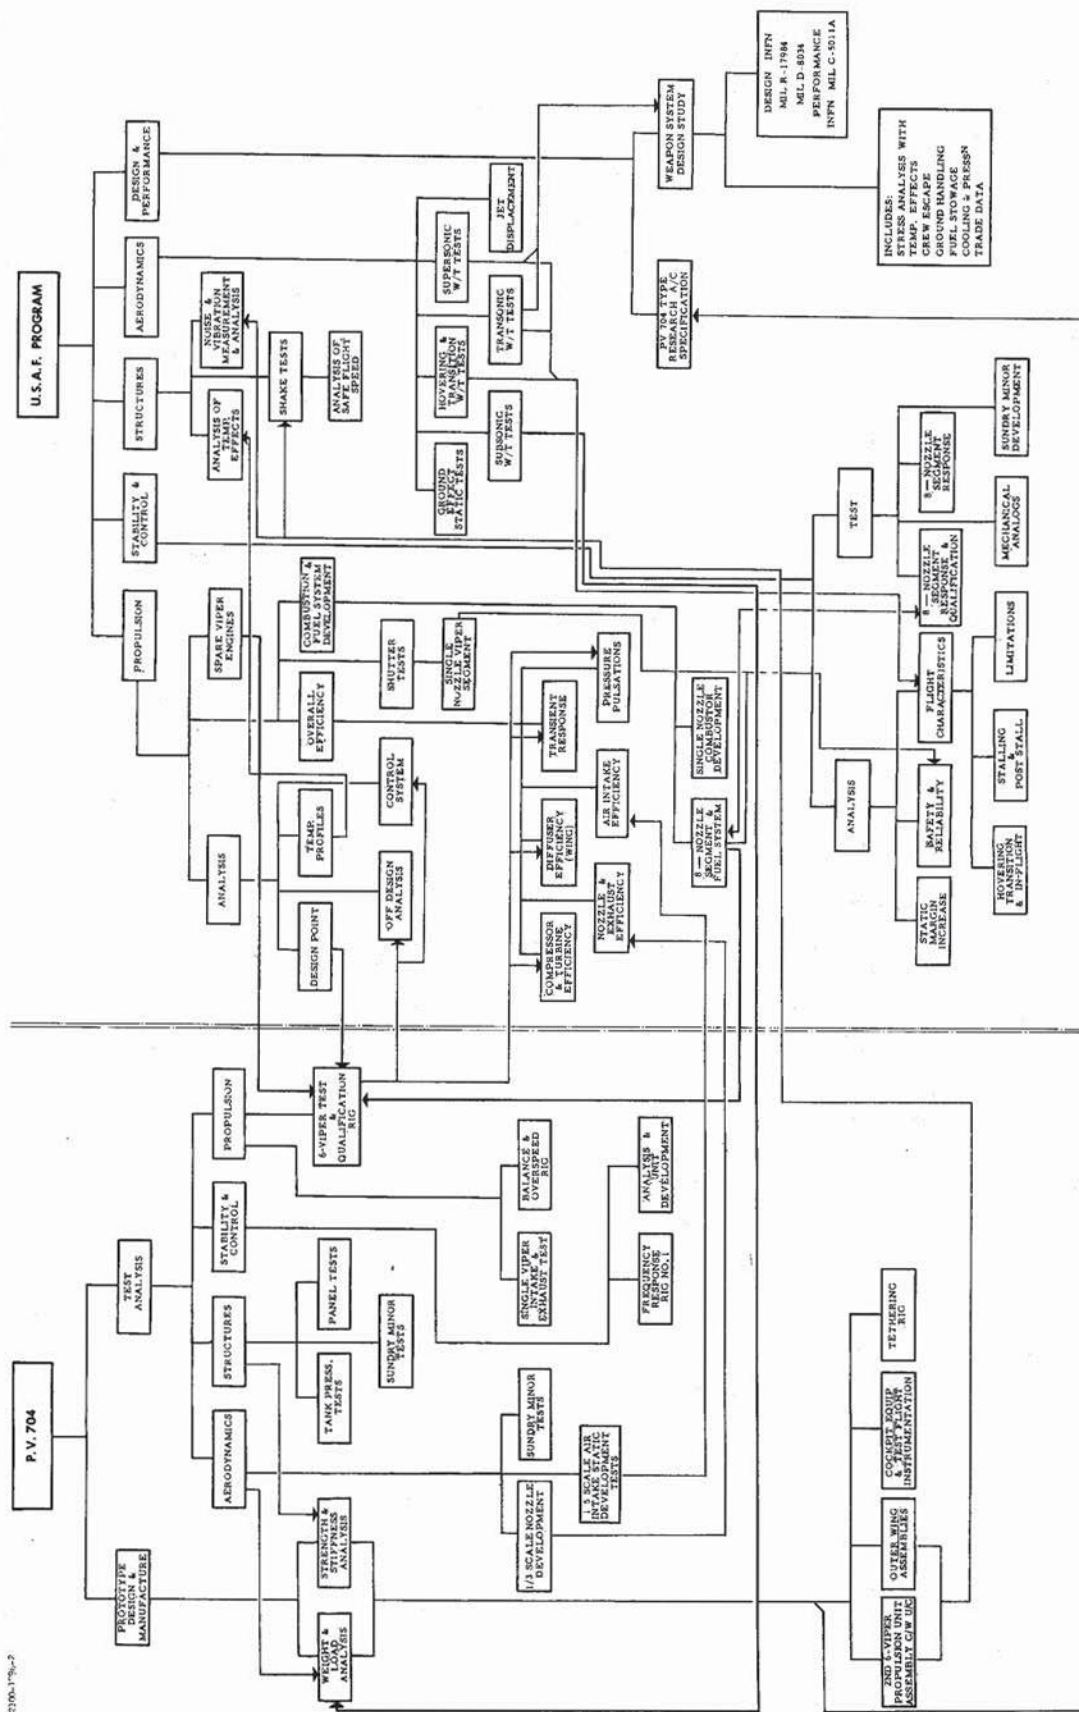


FIG.6.5 CONSOLIDATED WORK CHART

25/04/2015

DECLASSIFIED

DECLASSIFIED

MANHOUR AND COST ESTIMATES

DECLASSIFIED

DECLASSIFIED

PROJECT 1794 EXTENSION PROGRAM (SUPPLEMENTAL AGREEMENT NO. 3)
ANALYSIS OF ESTIMATED COSTS BY STATEMENT OF WORK THREE DIGIT SUB PART.

Statement of Work Sub Part 1.1.1 - Supersonic Tests

	Fiscal Year	Hours	Direct Labour Rate	Direct Labour Cost	Plant O/Head Rate	Plant O/Head Cost	Material & Direct Charges	Sub Total	Admin. O/Head Rate	Admin. O/Head Cost	Totals	Grand Totals
Design	1956/7	2000	\$ 2.75	\$ 5,500	115%	\$ 6,325	\$ 11,825	7.5%	\$ 886	\$ 12,711		
Test Data Reduction and Reports	1956/7/8/9	6000	2.85	17,100	120%	20,520	37,620	9.0%	3,385	41,005		
Totals		8000		22,600		26,845	49,445		4,271	\$ 53,716		
<i>22,716</i>												
<u>Manufacturing</u>												
Process Planning and Tool Design	1956/7	500	2.75	1,375	115%	1,581	2,956	7.5%	221	3,177		
Manufacturing	1956/7/8	3000	2.15	6,450	150%	9,675	18,125	9.0%	1,631	19,756		
Totals		3500		7,825		11,256	21,081		1,852	22,933		
										76,649		

1,200
1.6
2.00

DECLASSIFIED

DECLASSIFIED

Statement of Work Sub Part 1.1.2 - Transonic Tests

	<u>Fiscal</u> <u>Year</u>	<u>Hours</u>	<u>Direct</u> <u>Labour</u> <u>Rate</u>	<u>Direct</u> <u>Labour</u> <u>Cost</u>	<u>Plant</u> <u>O/Head</u> <u>Rate</u>	<u>Plant</u> <u>O/Head</u> <u>Cost</u>	<u>Material</u> <u>& Direct</u> <u>Charges</u>	<u>Sub Total</u>	<u>Admin.</u> <u>O/Head</u> <u>Rate</u>	<u>Admin.</u> <u>O/Head</u> <u>Cost</u>	<u>Totals</u>	<u>Grand</u> <u>Totals</u>
<u>Engineering</u>												
Design	1956/7	6500	2.75	\$ 17,875	115%	\$ 20,556		\$ 38,431	7.5%	\$ 2,882	\$ 41,313	
Test Data Reduction and Reports	1957/8/9	6000	2.85	17,100	120%	20,520		37,620	9.0%	3,385	41,005	
Totals		12500		34,975		41,076		76,051		6,267	82,318	\$ 82,318
<u>Manufacturing</u>												
Process Planning and Tool Design	1956/7	1000	2.75	2,750	115%	3,162		5,912	7.5%	443	6,355	
Manufacturing	1956/7/8	10000	2.15	21,500	150%	32,250	\$ 6,986	60,736	9.0%	5,466	66,202	
Totals		11000		24,250		35,412	6,986	66,648		5,909	72,557	72,557
												154,875

DECLASSIFIED

SECRET

DECLASSIFIED

Statement of Work Sub Part 1.1.3 - Subsonic Tests

	Fiscal Year	Hours	Direct Labour Rate	Direct Labour Cost	Plant O/Head Rate	Plant O/Head Cost	Material & Direct Charges	Sub Total	Admin. O/Head Rate	Admin. O/Head Cost	Totals	Grand Totals
<u>Engineering</u>												
Design	1956/7	2000	\$ 2.75	\$ 5,500	115%	\$ 6,325	\$ 11,825	7.5%	\$ 886	\$ 12,711		
Test Data Reduction and Reports	1957/8/9	5000	2.85	14,250	120%	17,100	31,350	9.0%	2,821	34,171		
Totals		7000		19,750		23,425	43,175		3,707	46,882	\$ 46,882	
<u>Manufacturing</u>												
Process Planning and Tool Design	1956/7	500	2.75	1,375	115%	1,581	2,956	7.5%	221	3,177		
Manufacturing	1957/8	5000	2.15	10,750	150%	16,125	\$ 5,000	9.0%	2,868	34,743		
Totals		5500		12,125		17,706	34,831		3,089	37,920	37,920	
											84,802	

116. note - completely designed - working into 2 years

DECLASSIFIED

DECLASSIFIED



PROJECT 1794

*to be for
1950 model
100,000 per
year
1952-1953
1954-1955
1956-1957
1958-1959*

Statement of Work Sub Part 1.1.4 - Hover and Transition Tests

	Fiscal Year	Hours	Direct Labour Rate	Direct Labour Cost	Plant O/Head Rate	Plant O/Head Cost	Material & Direct Charges	Sub Total	Admin. O/Head Rate	Admin. O/Head Cost	Totals	Grand Totals
Design	1956/7	3000	\$ 2.75	\$ 8,250	115%	\$ 9,487		\$ 17,737	7.5%	\$ 1,330	\$ 19,067	
Test Data Reduction and Reports	1957/8/9	6000	2.85	17,100	120%	20,520		37,620	9.0%	3,385	41,005	
Totals		9000		25,350		30,007		55,357		4,715	60,072	\$ 60,072
Manufacturing												
Process Planning and Tool Design	1956/7	500	2.75	1,375	115%	1,581		2,956	7.5%	221	3,177	
Manufacturing	1956/7/8	7500	2.15	16,125	150%	24,187	3,000	43,312	9.0%	3,898	47,210	
Totals		8000		17,500		25,768	3,000	46,268		4,119	50,387	110,459
												170,531

*all engs.
ready to go*

*2000-1957/8
1958-1959
1960-1961
1962-1963
1964-1965
1966-1967
1968-1969
1970-1971
1972-1973
1974-1975
1976-1977
1978-1979
1980-1981
1982-1983
1984-1985
1986-1987
1988-1989
1990-1991
1992-1993
1994-1995
1996-1997
1998-1999
2000-2001
2002-2003
2004-2005
2006-2007
2008-2009
2010-2011
2012-2013
2014-2015
2016-2017
2018-2019
2020-2021
2022-2023
2024-2025
2026-2027
2028-2029
2030-2031
2032-2033
2034-2035
2036-2037
2038-2039
2040-2041
2042-2043
2044-2045
2046-2047
2048-2049
2050-2051
2052-2053
2054-2055
2056-2057
2058-2059
2060-2061
2062-2063
2064-2065
2066-2067
2068-2069
2070-2071
2072-2073
2074-2075
2076-2077
2078-2079
2080-2081
2082-2083
2084-2085
2086-2087
2088-2089
2090-2091
2092-2093
2094-2095
2096-2097
2098-2099
2100-2101
2102-2103
2104-2105
2106-2107
2108-2109
2110-2111
2112-2113
2114-2115
2116-2117
2118-2119
2120-2121
2122-2123
2124-2125
2126-2127
2128-2129
2130-2131
2132-2133
2134-2135
2136-2137
2138-2139
2140-2141
2142-2143
2144-2145
2146-2147
2148-2149
2150-2151
2152-2153
2154-2155
2156-2157
2158-2159
2160-2161
2162-2163
2164-2165
2166-2167
2168-2169
2170-2171
2172-2173
2174-2175
2176-2177
2178-2179
2180-2181
2182-2183
2184-2185
2186-2187
2188-2189
2190-2191
2192-2193
2194-2195
2196-2197
2198-2199
2200-2201
2202-2203
2204-2205
2206-2207
2208-2209
2210-2211
2212-2213
2214-2215
2216-2217
2218-2219
2220-2221
2222-2223
2224-2225
2226-2227
2228-2229
2230-2231
2232-2233
2234-2235
2236-2237
2238-2239
2240-2241
2242-2243
2244-2245
2246-2247
2248-2249
2250-2251
2252-2253
2254-2255
2256-2257
2258-2259
2260-2261
2262-2263
2264-2265
2266-2267
2268-2269
2270-2271
2272-2273
2274-2275
2276-2277
2278-2279
2280-2281
2282-2283
2284-2285
2286-2287
2288-2289
2290-2291
2292-2293
2294-2295
2296-2297
2298-2299
2300-2301
2302-2303
2304-2305
2306-2307
2308-2309
2310-2311
2312-2313
2314-2315
2316-2317
2318-2319
2320-2321
2322-2323
2324-2325
2326-2327
2328-2329
2330-2331
2332-2333
2334-2335
2336-2337
2338-2339
2340-2341
2342-2343
2344-2345
2346-2347
2348-2349
2350-2351
2352-2353
2354-2355
2356-2357
2358-2359
2360-2361
2362-2363
2364-2365
2366-2367
2368-2369
2370-2371
2372-2373
2374-2375
2376-2377
2378-2379
2380-2381
2382-2383
2384-2385
2386-2387
2388-2389
2390-2391
2392-2393
2394-2395
2396-2397
2398-2399
2400-2401
2402-2403
2404-2405
2406-2407
2408-2409
2410-2411
2412-2413
2414-2415
2416-2417
2418-2419
2420-2421
2422-2423
2424-2425
2426-2427
2428-2429
2430-2431
2432-2433
2434-2435
2436-2437
2438-2439
2440-2441
2442-2443
2444-2445
2446-2447
2448-2449
2450-2451
2452-2453
2454-2455
2456-2457
2458-2459
2460-2461
2462-2463
2464-2465
2466-2467
2468-2469
2470-2471
2472-2473
2474-2475
2476-2477
2478-2479
2480-2481
2482-2483
2484-2485
2486-2487
2488-2489
2490-2491
2492-2493
2494-2495
2496-2497
2498-2499
2500-2501
2502-2503
2504-2505
2506-2507
2508-2509
2510-2511
2512-2513
2514-2515
2516-2517
2518-2519
2520-2521
2522-2523
2524-2525
2526-2527
2528-2529
2530-2531
2532-2533
2534-2535
2536-2537
2538-2539
2540-2541
2542-2543
2544-2545
2546-2547
2548-2549
2550-2551
2552-2553
2554-2555
2556-2557
2558-2559
2560-2561
2562-2563
2564-2565
2566-2567
2568-2569
2570-2571
2572-2573
2574-2575
2576-2577
2578-2579
2580-2581
2582-2583
2584-2585
2586-2587
2588-2589
2590-2591
2592-2593
2594-2595
2596-2597
2598-2599
2600-2601
2602-2603
2604-2605
2606-2607
2608-2609
2610-2611
2612-2613
2614-2615
2616-2617
2618-2619
2620-2621
2622-2623
2624-2625
2626-2627
2628-2629
2630-2631
2632-2633
2634-2635
2636-2637
2638-2639
2640-2641
2642-2643
2644-2645
2646-2647
2648-2649
2650-2651
2652-2653
2654-2655
2656-2657
2658-2659
2660-2661
2662-2663
2664-2665
2666-2667
2668-2669
2670-2671
2672-2673
2674-2675
2676-2677
2678-2679
2680-2681
2682-2683
2684-2685
2686-2687
2688-2689
2690-2691
2692-2693
2694-2695
2696-2697
2698-2699
2700-2701
2702-2703
2704-2705
2706-2707
2708-2709
2710-2711
2712-2713
2714-2715
2716-2717
2718-2719
2720-2721
2722-2723
2724-2725
2726-2727
2728-2729
2730-2731
2732-2733
2734-2735
2736-2737
2738-2739
2740-2741
2742-2743
2744-2745
2746-2747
2748-2749
2750-2751
2752-2753
2754-2755
2756-2757
2758-2759
2760-2761
2762-2763
2764-2765
2766-2767
2768-2769
2770-2771
2772-2773
2774-2775
2776-2777
2778-2779
2780-2781
2782-2783
2784-2785
2786-2787
2788-2789
2790-2791
2792-2793
2794-2795
2796-2797
2798-2799
2800-2801
2802-2803
2804-2805
2806-2807
2808-2809
2810-2811
2812-2813
2814-2815
2816-2817
2818-2819
2820-2821
2822-2823
2824-2825
2826-2827
2828-2829
2830-2831
2832-2833
2834-2835
2836-2837
2838-2839
2840-2841
2842-2843
2844-2845
2846-2847
2848-2849
2850-2851
2852-2853
2854-2855
2856-2857
2858-2859
2860-2861
2862-2863
2864-2865
2866-2867
2868-2869
2870-2871
2872-2873
2874-2875
2876-2877
2878-2879
2880-2881
2882-2883
2884-2885
2886-2887
2888-2889
2890-2891
2892-2893
2894-2895
2896-2897
2898-2899
2900-2901
2902-2903
2904-2905
2906-2907
2908-2909
2910-2911
2912-2913
2914-2915
2916-2917
2918-2919
2920-2921
2922-2923
2924-2925
2926-2927
2928-2929
2930-2931
2932-2933
2934-2935
2936-2937
2938-2939
2940-2941
2942-2943
2944-2945
2946-2947
2948-2949
2950-2951
2952-2953
2954-2955
2956-2957
2958-2959
2960-2961
2962-2963
2964-2965
2966-2967
2968-2969
2970-2971
2972-2973
2974-2975
2976-2977
2978-2979
2980-2981
2982-2983
2984-2985
2986-2987
2988-2989
2990-2991
2992-2993
2994-2995
2996-2997
2998-2999
3000-3001
3002-3003
3004-3005
3006-3007
3008-3009
3010-3011
3012-3013
3014-3015
3016-3017
3018-3019
3020-3021
3022-3023
3024-3025
3026-3027
3028-3029
3030-3031
3032-3033
3034-3035
3036-3037
3038-3039
3040-3041
3042-3043
3044-3045
3046-3047
3048-3049
3050-3051
3052-3053
3054-3055
3056-3057
3058-3059
3060-3061
3062-3063
3064-3065
3066-3067
3068-3069
3070-3071
3072-3073
3074-3075
3076-3077
3078-3079
3080-3081
3082-3083
3084-3085
3086-3087
3088-3089
3090-3091
3092-3093
3094-3095
3096-3097
3098-3099
3100-3101
3102-3103
3104-3105
3106-3107
3108-3109
3110-3111
3112-3113
3114-3115
3116-3117
3118-3119
3120-3121
3122-3123
3124-3125
3126-3127
3128-3129
3130-3131
3132-3133
3134-3135
3136-3137
3138-3139
3140-3141
3142-3143
3144-3145
3146-3147
3148-3149
3150-3151
3152-3153
3154-3155
3156-3157
3158-3159
3160-3161
3162-3163
3164-3165
3166-3167
3168-3169
3170-3171
3172-3173
3174-3175
3176-3177
3178-3179
3180-3181
3182-3183
3184-3185
3186-3187
3188-3189
3190-3191
3192-3193
3194-3195
3196-3197
3198-3199
3200-3201
3202-3203
3204-3205
3206-3207
3208-3209
3210-3211
3212-3213
3214-3215
3216-3217
3218-3219
3220-3221
3222-3223
3224-3225
3226-3227
3228-3229
3230-3231
3232-3233
3234-3235
3236-3237
3238-3239
3240-3241
3242-3243
3244-3245
3246-3247
3248-3249
3250-3251
3252-3253
3254-3255
3256-3257
3258-3259
3260-3261
3262-3263
3264-3265
3266-3267
3268-3269
3270-3271
3272-3273
3274-3275
3276-3277
3278-3279
3280-3281
3282-3283
3284-3285
3286-3287
3288-3289
3290-3291
3292-3293
3294-3295
3296-3297
3298-3299
3300-3301
3302-3303
3304-3305
3306-3307
3308-3309
3310-3311
3312-3313
3314-3315
3316-3317
3318-3319
3320-3321
3322-3323
3324-3325
3326-3327
3328-3329
3330-3331
3332-3333
3334-3335
3336-3337
3338-3339
3340-3341
3342-3343
3344-3345
3346-3347
3348-3349
3350-3351
3352-3353
3354-3355
3356-3357
3358-3359
3360-3361
3362-3363
3364-3365
3366-3367
3368-3369
3370-3371
3372-3373
3374-3375
3376-3377
3378-3379
3380-3381
3382-3383
3384-3385
3386-3387
3388-3389
3390-3391
3392-3393
3394-3395
3396-3397
3398-3399
3400-3401
3402-3403
3404-3405
3406-3407
3408-3409
3410-3411
3412-3413
3414-3415
3416-3417
3418-3419
3420-3421
3422-3423
3424-3425
3426-3427
3428-3429
3430-3431
3432-3433
3434-3435
3436-3437
3438-3439
3440-3441
3442-3443
3444-3445
3446-3447
3448-3449
3450-3451
3452-3453
3454-3455
3456-3457
3458-3459
3460-3461
3462-3463
3464-3465
3466-3467
3468-3469
3470-3471
3472-3473
3474-3475
3476-3477
3478-3479
3480-3481
3482-3483
3484-3485
3486-3487
3488-3489
3490-3491
3492-3493
3494-3495
3496-3497
3498-3499
3500-3501
3502-3503
3504-3505
3506-3507
3508-3509
3510-3511
3512-3513
3514-3515
3516-3517
3518-3519
3520-3521
3522-3523
3524-3525
3526-3527
3528-3529
3530-3531
3532-3533
3534-3535
3536-3537
3538-3539
3540-3541
3542-3543
3544-3545
3546-3547
3548-3549
3550-3551
3552-3553
3554-3555
3556-3557
3558-3559
3560-3561
3562-3563
3564-3565
3566-3567
3568-3569
3570-3571
3572-3573
3574-3575
3576-3577
3578-3579
3580-3581
3582-3583
3584-3585
3586-3587
3588-3589
3590-3591
3592-3593
3594-3595
3596-3597
3598-3599
3600-3601
3602-3603
3604-3605
3606-3607
3608-3609
3610-3611
3612-3613
3614-3615
3616-3617
3618-3619
3620-3621
3622-3623
3624-3625
3626-3627
3628-3629
3630-3631
3632-3633
3634-3635
3636-3637
3638-3639
3640-3641
3642-3643
3644-3645
3646-3647
3648-3649
3650-3651
3652-3653
3654-3655
3656-3657
3658-3659
3660-3661
3662-3663
3664-3665
3666-3667
3668-3669
3670-3671
3672-3673
3674-3675
3676-3677
3678-3679
3680-3681
3682-3683
3684-3685
3686-3687
3688-3689
3690-3691
3692-3693
3694-3695
3696-3697
3698-3699
3700-3701
3702-3703
3704-3705
3706-3707
3708-3709
3710-3711
3712-3713
3714-3715
3716-3717
3718-3719
3720-3721
3722-3723
3724-3725
3726-3727
3728-3729
3730-3731
3732-3733
3734-3735
3736-3737
3738-3739
3740-3741
3742-3743
3744-3745
3746-3747
3748-3749
3750-3751
3752-3753
3754-3755
3756-3757
3758-3759
3760-3761
3762-3763
3764-3765
3766-3767
3768-3769
3770-3771
3772-3773
3774-3775
3776-3777
3778-3779
3780-3781
3782-3783
3784-3785
3786-3787
3788-3789
3790-3791
3792-3793
3794-3795
3796-3797
3798-3799
3800-3801
3802-3803
3804-3805
3806-3807
3808-3809
3810-3811
3812-3813
3814-3815
3816-3817
3818-3819
3820-3821
3822-3823
3824-3825
3826-3827
3828-3829
3830-3831
3832-3833
3834-3835
3836-3837
3838-3839
3840-3841
3842-3843
3844-3845
3846-3847
3848-3849
3850-3851
3852-3853
3854-3855
3856-3857
3858-3859
3860-3861
3862-3863
3864-3865
3866-3867
3868-3869
3870-3871
3872-3873
3874-3875
3876-3877
3878-3879
3880-3881
3882-3883
3884-3885
3886-3887
38*

DECLASSIFIED



PROJECT 1794

Statement of Work Sub Part 1.1.5 - Air and Exhaust Gas Flow

Engineering	Fiscal Year	Hours	Direct		Plant		Material & Direct Charges	Sub Total	Admin.		Totals	Grand Totals
			Labour	Rate	O/Head	Cost			O/Head	Cost		
Test Data Reduction and Reports	1957/8/9	22600	\$ 2.85		\$ 64,410	120%		\$ 77,292			\$ 141,702	
									9.0%	\$ 12,753	\$ 154,455	\$ 154,455

Statement of Work Sub Part 1.1.6 - Propulsion System

Engineering	Fiscal Year	Hours	Direct		Plant		Material & Direct Charges	Sub Total	Admin.		Totals	Grand Totals
			Labour	Rate	O/Head	Cost			O/Head	Cost		
Test Data Reduction and Reports	1956/7/8/9	6000	2.85		17,100	120%		20,520			37,620	
									9.0%	3,385	41,005	41,005

Statement of Work Sub Part 1.1.7 - Propulsion System Component Tests

Engineering	Fiscal Year	Direct		Plant		Material & Direct Charges	Sub Contract	Grand Totals
		Labour	Rate	O/Head	Cost			
Combustion Fuel System Design Development Tests and Reports	1956/7/8/9					\$ 430,960		430,960

*Test rig built
negotiated
evening contract; considered for training.
credit not recommended reported.
last 8 years old beyond now.*

*349
446*

1000 1000 1000

DECLASSIFIED

DECLASSIFIED

Statement of Work Sub Part 1.1.8 - Stability and Control

<u>Engineering</u>	<u>Fiscal Year</u>	<u>Hours</u>	<u>Direct Labour Rate</u>	<u>Direct Labour Cost</u>	<u>Plant O/Head Rate</u>	<u>Plant O/Head Cost</u>	<u>Material & Direct Charges</u>	<u>Sub Total</u>	<u>Admin. O/Head Rate</u>	<u>Admin. O/Head Cost</u>	<u>Totals</u>	<u>Grand Totals</u>
Test Data Reduction and Reports	1956/7/8/9	14000	\$ 2.85	\$ 39,900	120%	\$ 47,880		\$ 87,780	9.0%	\$ 7,900	\$ 95,680	
<i>Contracted during currency period.</i>												

Manufacturing

Manufacturing	1956/7/8	1000	2.15	2,150	150%	3,225	\$ 1,360	6,735	9.0%	606	7,341	
Totals		15000		42,050		51,105	1,360	94,515		8,506	103,021	\$ 103,021

Statement of Work Sub Part 1.1.9 - Weapons System Study

<u>Engineering</u>	<u>Fiscal Year</u>	<u>Hours</u>	<u>Direct Labour Rate</u>	<u>Direct Labour Cost</u>	<u>Plant O/Head Rate</u>	<u>Plant O/Head Cost</u>	<u>Material & Direct Charges</u>	<u>Sub Total</u>	<u>Admin. O/Head Rate</u>	<u>Admin. O/Head Cost</u>	<u>Totals</u>	<u>Grand Totals</u>
Weapons Systems Study	1956/7/8/9	21600	\$ 2.85	\$ 61,560	120%	\$ 73,872		\$ 135,432	9.0%	\$ 12,189	\$ 147,621	\$ 147,621

DECLASSIFIED

DECLASSIFIED

PROJECT 1794 EXTENSION

SUMMARY OF COSTS

	Fiscal Year	Hours	Direct Labour Rate	Direct Labour Cost	Plant O/Head Rate	Plant O/Head Cost	Material & Direct Charges	Sub Total	Admin. O/Head Rate	Admin. O/Head Cost	Totals	Grand Totals
<u>Engineering</u>												
Design	1956/7	13500	\$ 2.75	\$ 37,125	115%	\$ 42,693		\$ 79,818	7.5%	\$ 5,984	\$ 85,802	
Test Data, Reduction and Reports, Weapons Systems Study	1956/7/8/9	87200	2.85	248,520	120%	298,224		546,744	9.0%	49,203	595,947	
Totals		100700		285,645		340,917		626,562		55,187	\$ 681,749	
<u>Manufacturing</u>												
Process Planning and Tool Design	1956/7	2500	2.75	6,875	115%	7,905		14,780	7.5%	1,106	15,886	
Manufacturing	1956/7/8	26500	2.15	56,975	150%	85,462	\$ 18,346	160,783	9.0%	14,469	175,252	
Totals		29000		63,850		93,367	18,346	175,563		15,575	191,138	
Combustion and Fuel Systems Design and Development - Sub Contract - Lucas Rotex Limited per estimate. 6 A.S.M. Viper 8 Standard Provost Type Engines												
							180,000	430,960	9.0%	38,787	469,747	
									7.5%	13,500	193,500	
GRAND TOTAL.....												\$ 1,536,134



ALL AMOUNTS SHOWN IN CANADIAN FUNDS

Cost for Wind Tunnel Facilities not included

52,000
 1,536,134
 1,588,134
 1,587,579
 40,000
 1,641,579
 48,579

DECLASSIFIED

2715-706-1

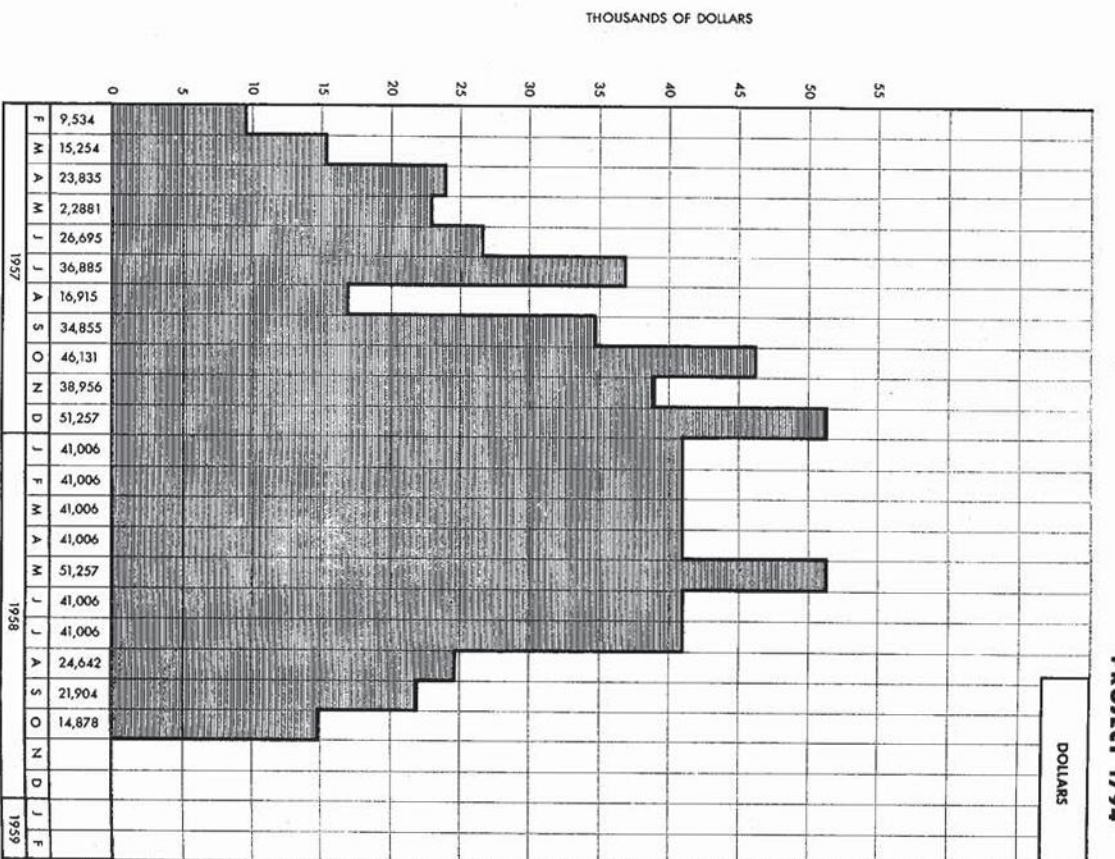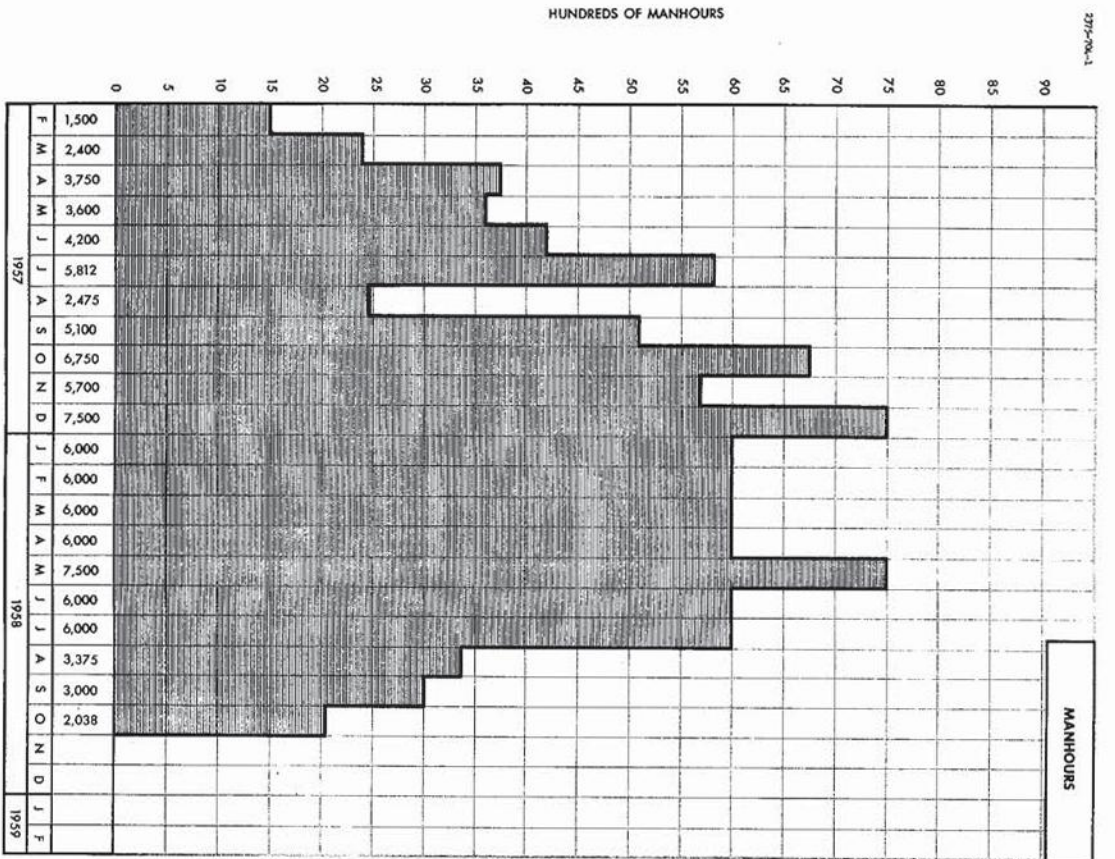



MONTHLY BREAKDOWN - ENGINEERING MANHOURS AND DOLLARS

SECRET

DECLASSIFIED

DECLASSIFIED



27-1794-1

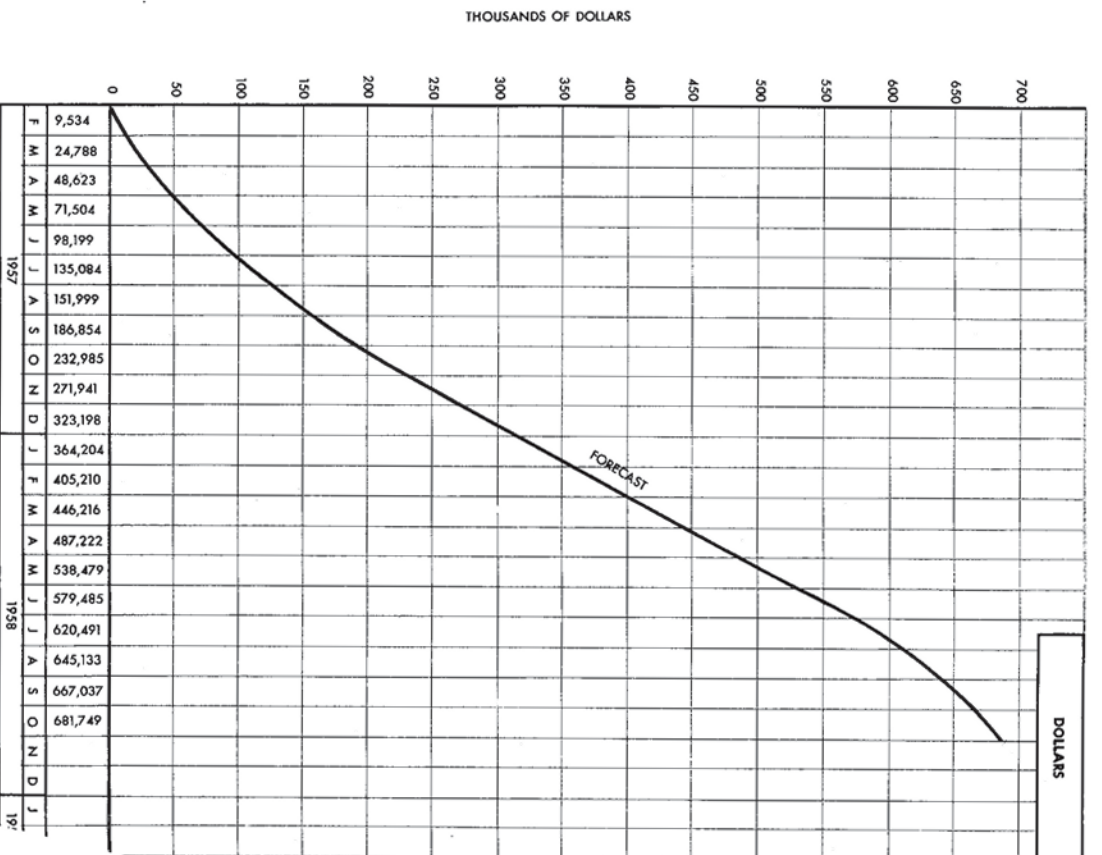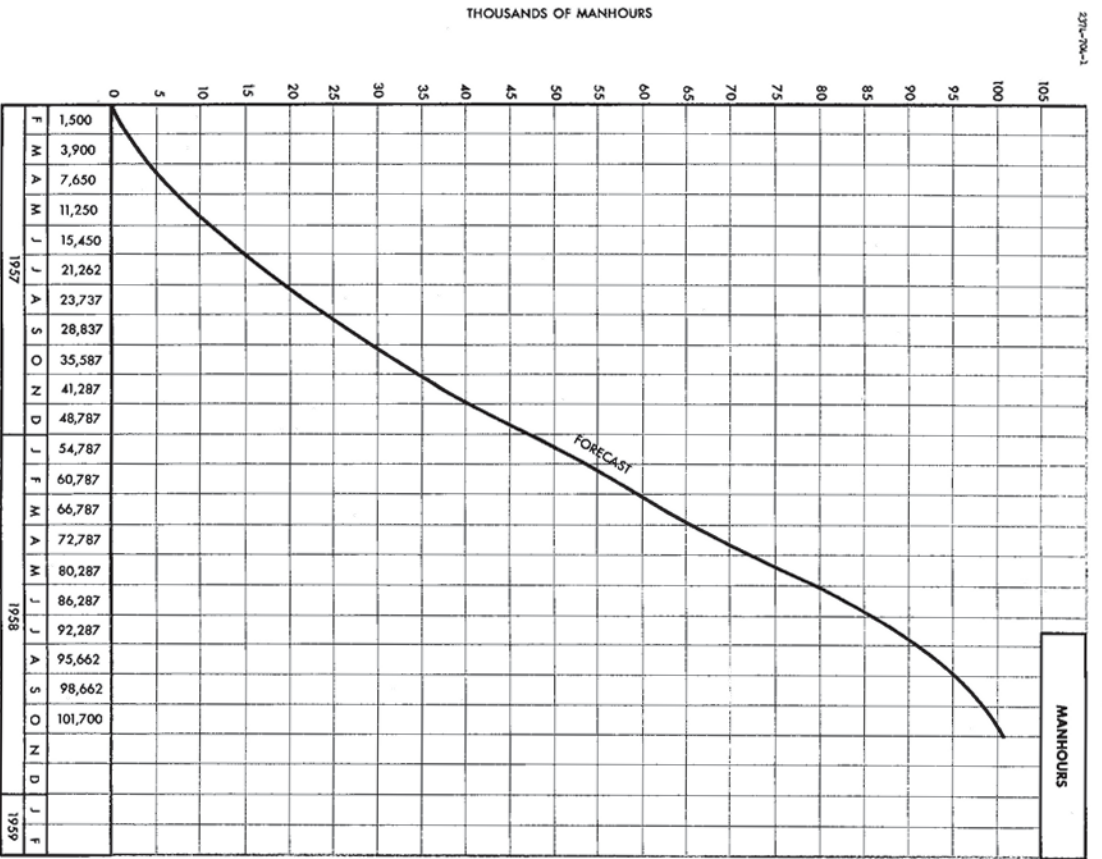

ENGINEERING MANHOURS AND DOLLARS - CUMULATIVE

DECLASSIFIED

207-704-1

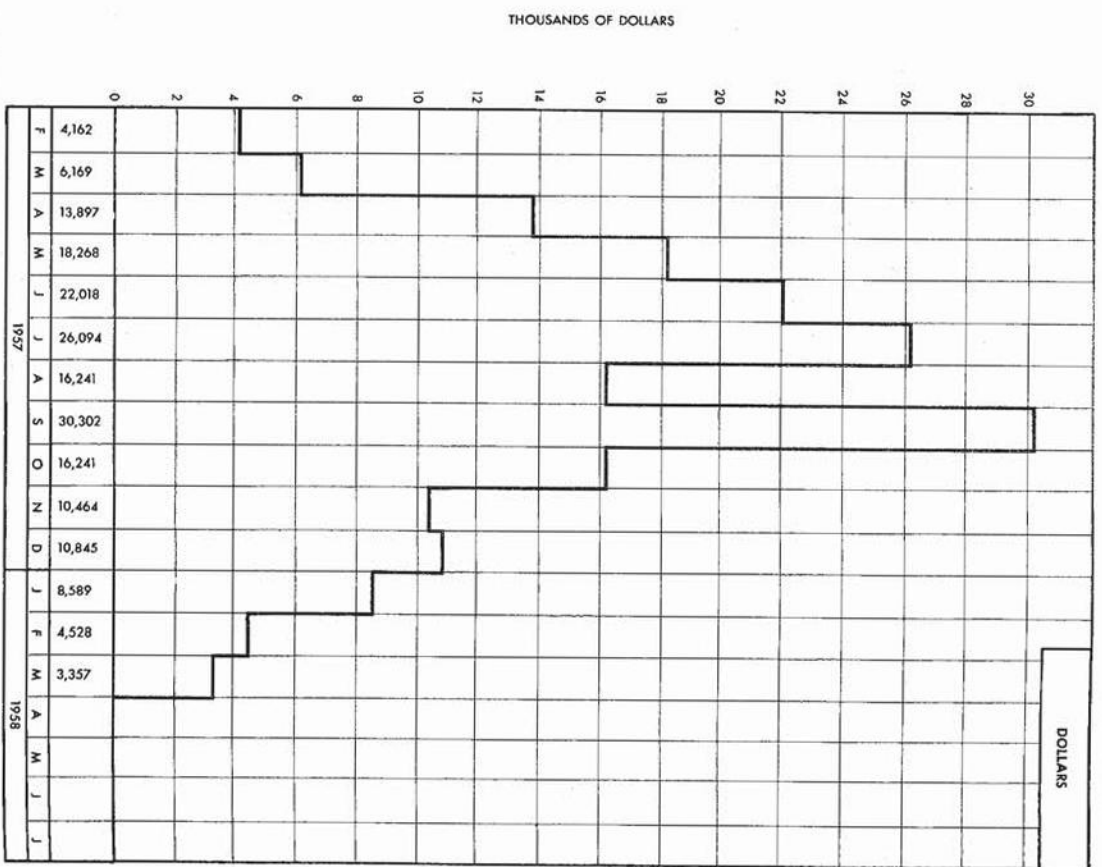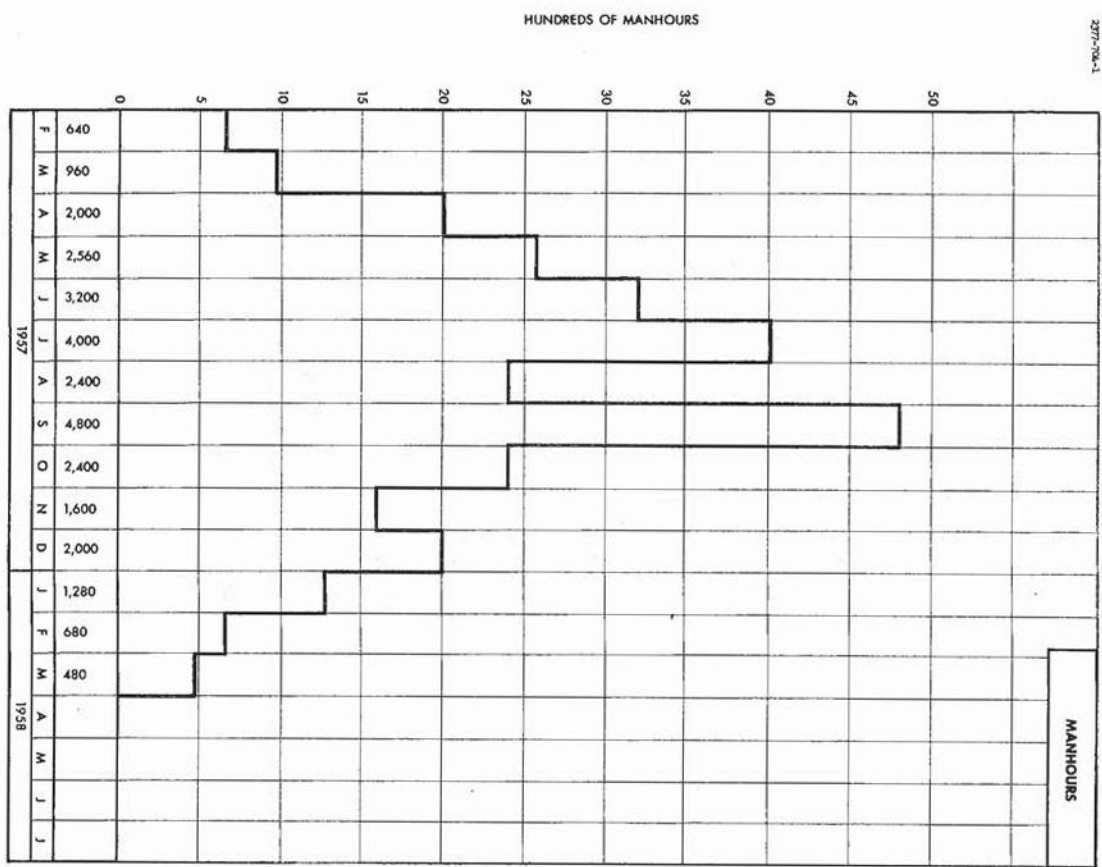



MONTHLY BREAKDOWN MANUFACTURING MANHOURS AND DOLLARS

DECLASSIFIED

DECLASSIFIED





2376-104-1

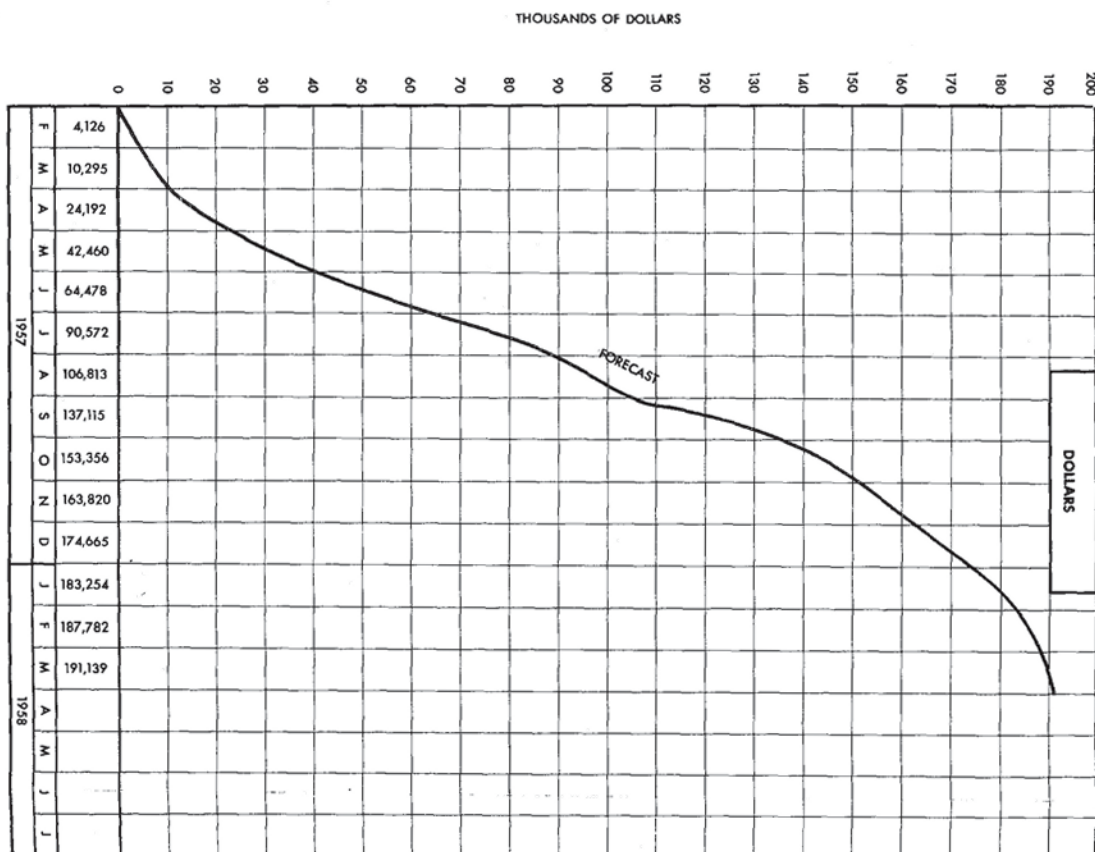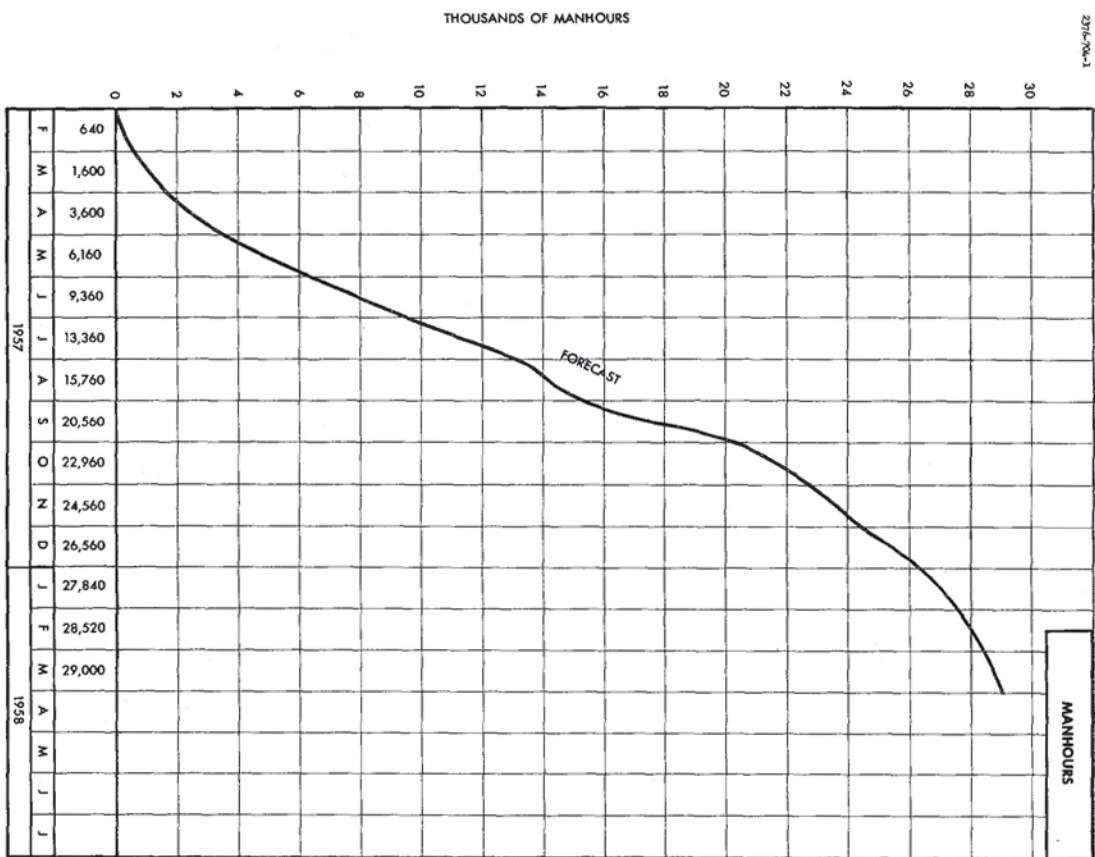

MANUFACTURING MANHOURS AND DOLLARS - CUMULATIVE

DECLASSIFIED

2276-706-1

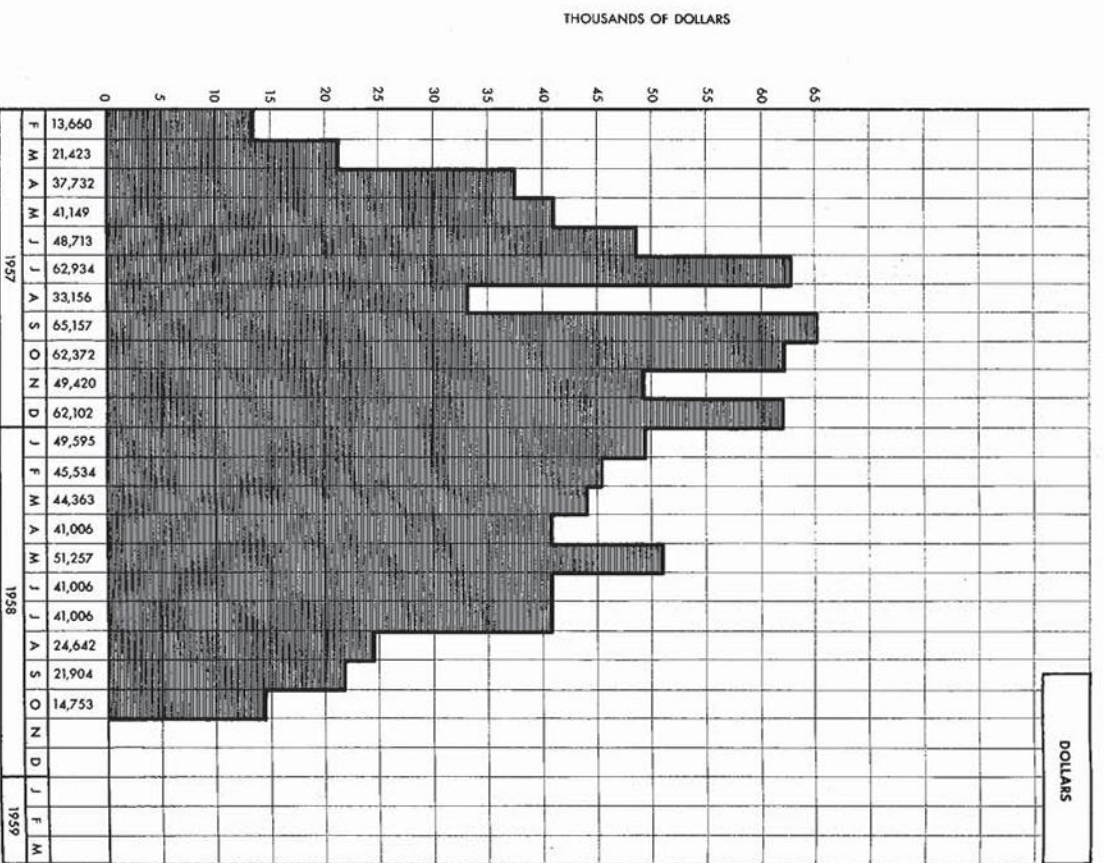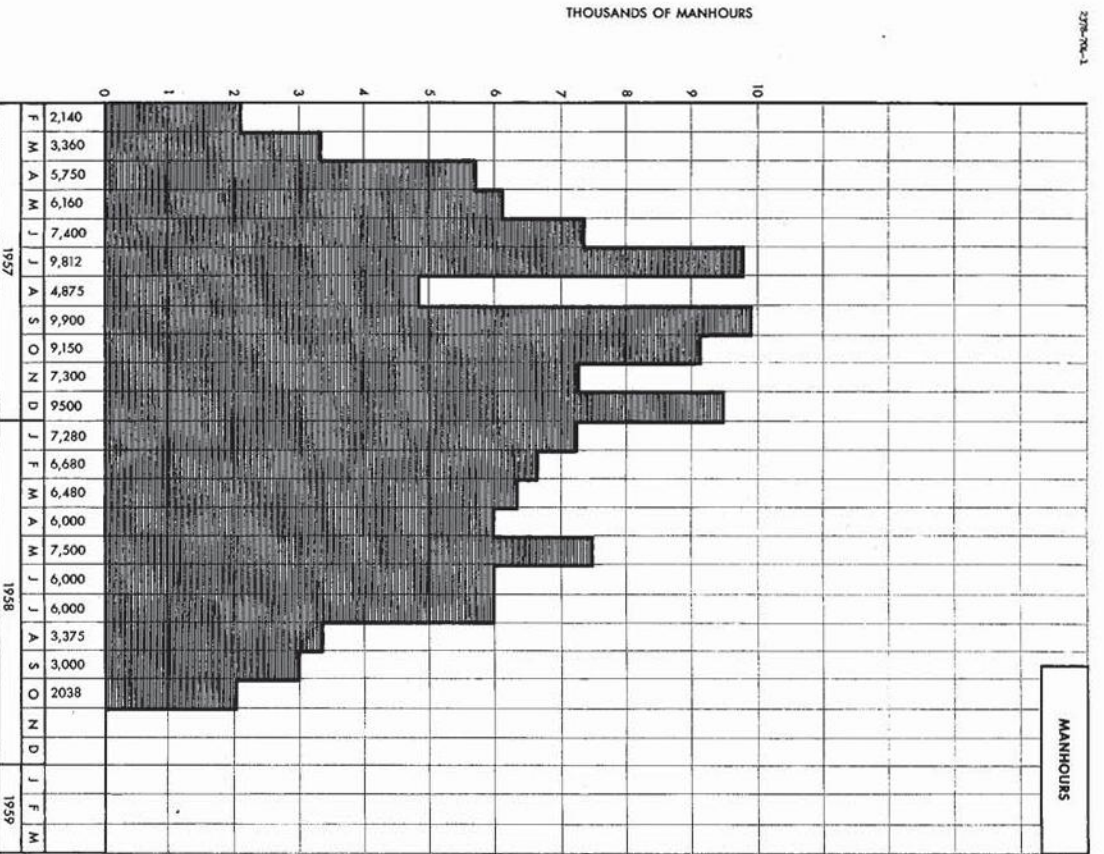

MONTHLY BREAKDOWN TOTAL ENGINEERING AND MANUFACTURING MANHOURS AND DOLLARS



SECRET

DECLASSIFIED

DECLASSIFIED

PROJECT 1794

277-70-1

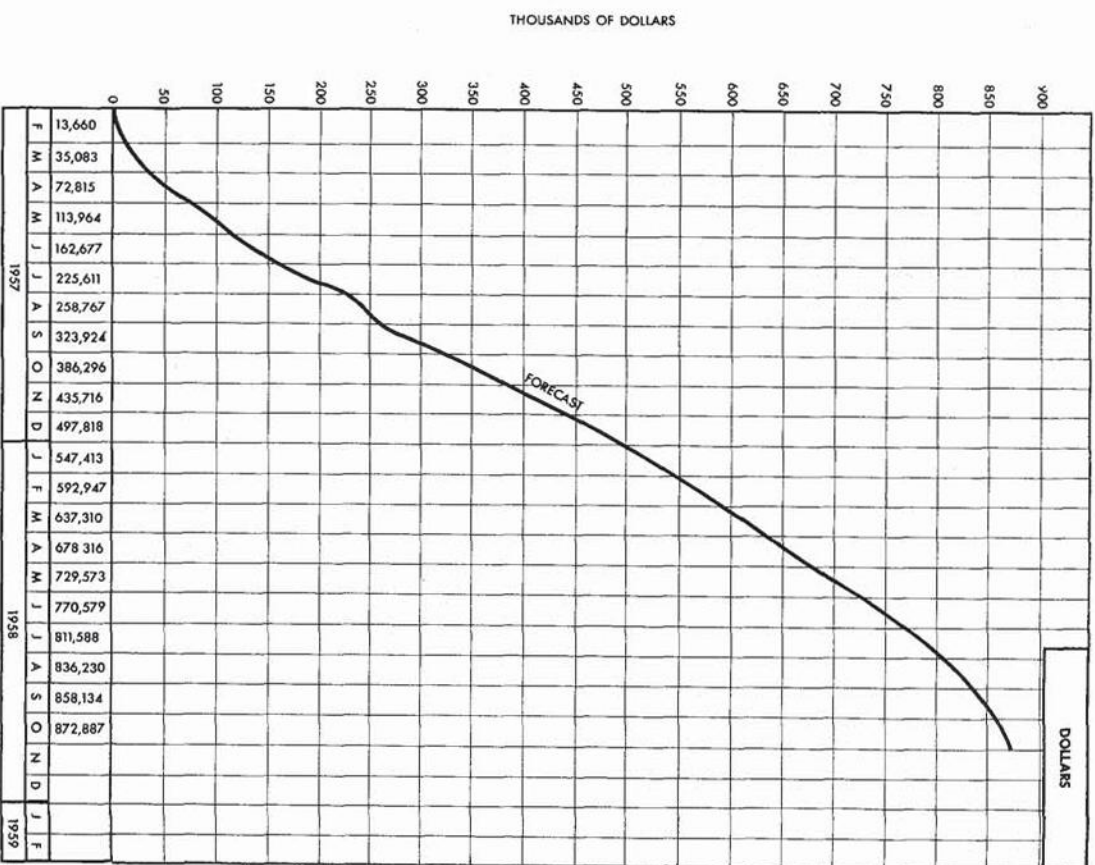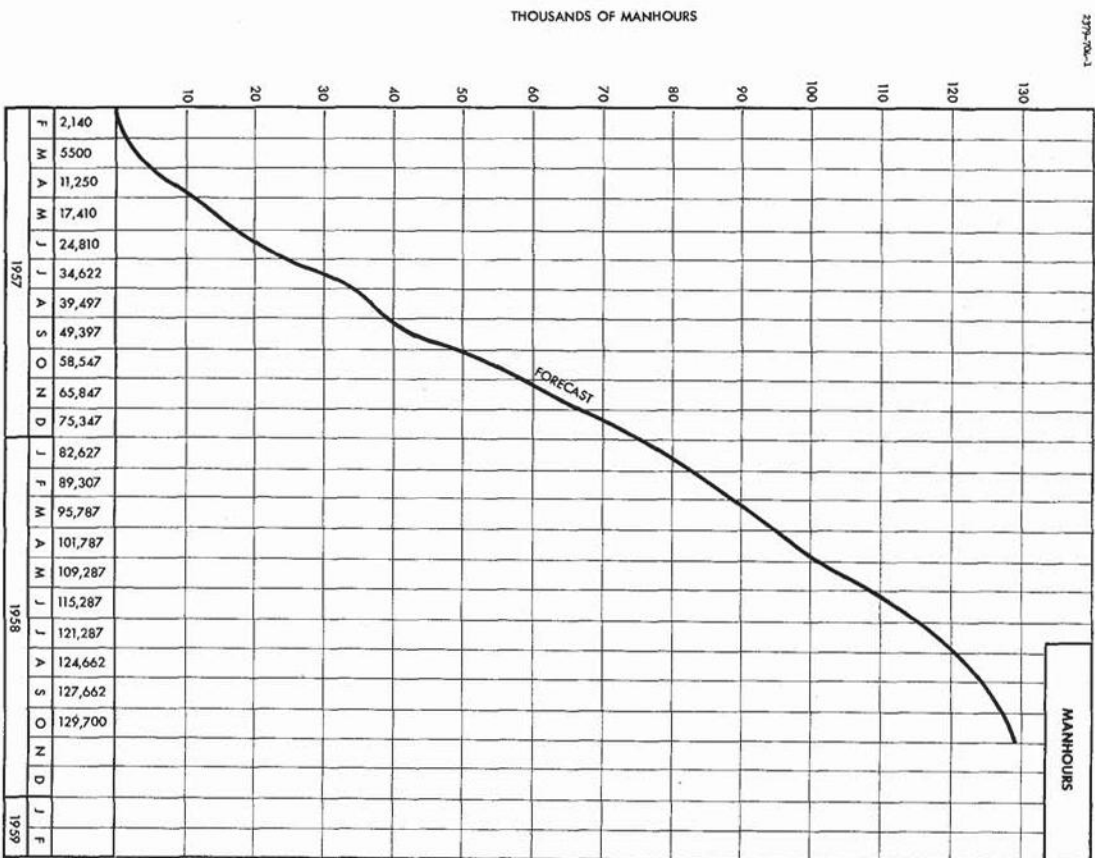

TOTAL ENGINEERING AND MANUFACTURING MANHOURS AND DOLLARS - CUMULATIVE

DECLASSIFIED


DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

2380-704-1

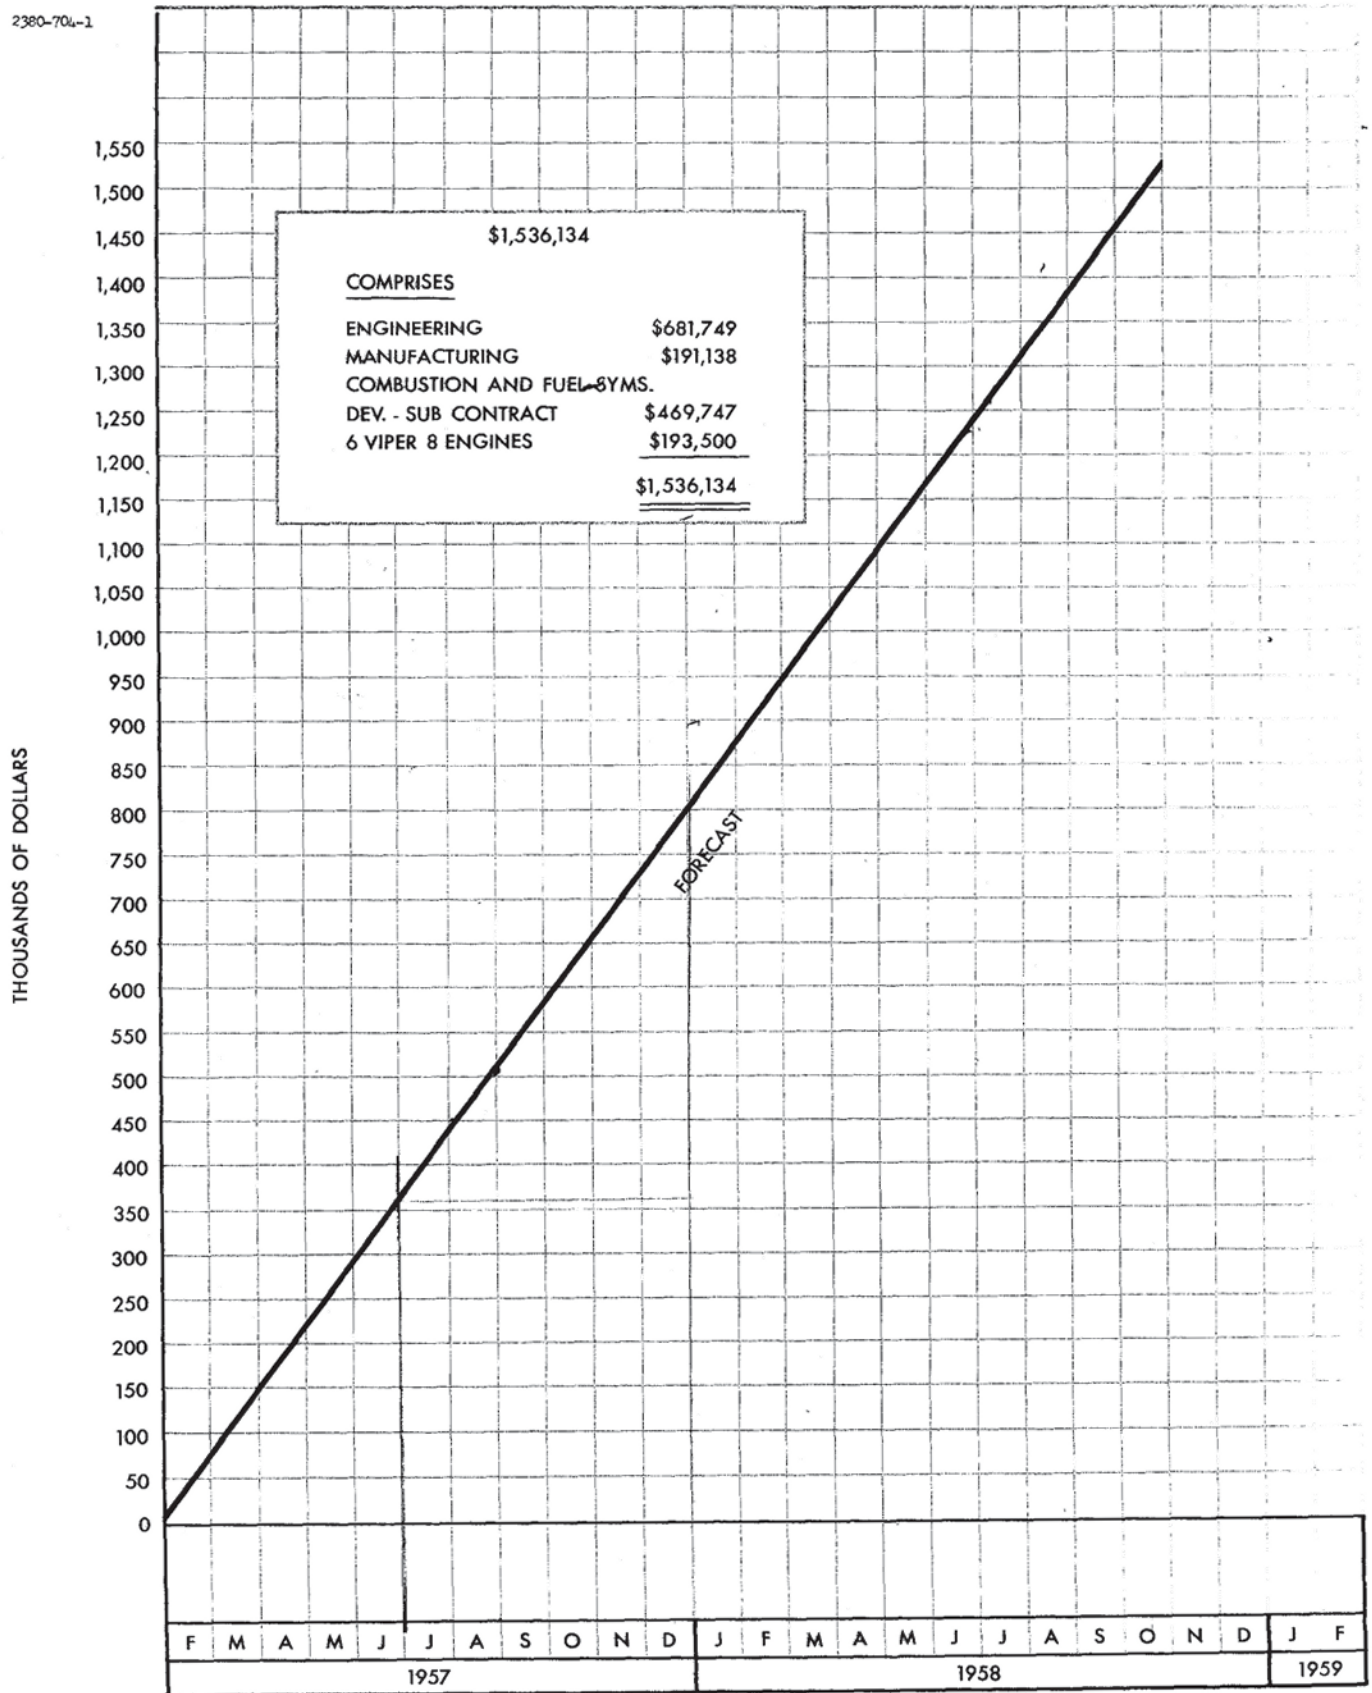

PROGRAM TOTAL DOLLAR COST

DECLASSIFIED

91-00001

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

SPECIAL PROJECTS GROUP PERSONNEL

	<u>No. of Personnel</u>
Chief Design Engineer	1
Project Designer	1
Senior Design Engineer	1
Senior Designer	5
Designer A/C	6
Design Draftsman	6
Draftsman 'A'	8
Draftsman 'B'	2
Senior Loftsmen	1
Lines Loftsmen 'B'	6
Chief Aerodynamicist	1
Sr. Aerodynamicist	1
Aerodynamicist - Engineering	4
Thermodynamicist	1
Aerodynamicist 'A'	8
Senior Stress Engineer	1
Stress Engineer 'A'	2
Stress Engineer 'B'	4
Junior Stress Engineer	3
Junior Aerodynamicist Engineer	3
Weights Estimator 'A'	1

DECLASSIFIED

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

The following rates of Labour and Overhead have been applied in the compilation of costs estimates for the program of work outlined in this proposal.

Labour Rates

For Engineering	Year Ending July 31/57	\$ 2.75
	Year Ending July 31/58	2.85
	Year Ending July 31/59	2.95
For Experimental	Year Ending July 31/57	2.10
	Year Ending July 31/58	2.15
	Year Ending July 31/59	2.20

Overhead Rates

For Engineering	Year Ending July 31/57	115%
	Year Ending July 31/58	120%
	Year Ending July 31/59	125%
For Experimental	Year Ending July 31/57	150%
	Year Ending July 31/58	150%
	Year Ending July 31/59	150%
For Administrative	Year Ending July 31/57	7.5%
	Year Ending July 31/58	9.0%
	Year Ending July 31/59	10.0%

Application of Rates

Labour + Overhead + Material and Direct Charges + Administrative.

DECLASSIFIED

DECLASSIFIED

AVRO AIRCRAFT LIMITED



PROJECT 1794

9. COMPANY STATEMENTS

Management

The program of work specified in this proposal will be managed in all phases of Engineering, Administration and Experiment Manufacturing by the same management personnel who were responsible for the previous Project 1794 program and whose responsibilities are shown in Exhibit 1 and Exhibit 2.

Should it be found necessary during the contract period to effect changes (in the interest of the work) of key personnel or their responsibilities, this will only be done after consultation with the United States Air Force.

Facilities

The contractors will provide all the facilities necessary, to accomplish the program of work specified in this proposal, with the exception of Wind Tunnel facilities which are to be furnished by the United States Government.

Personnel


The contractor undertakes to provide professional, skilled, semi-skilled and other classifications of labour in sufficient numbers to support the program.

DECLASSIFIED

~~SECRET~~



DECLASSIFIED
AVRO AIRCRAFT LIMITED

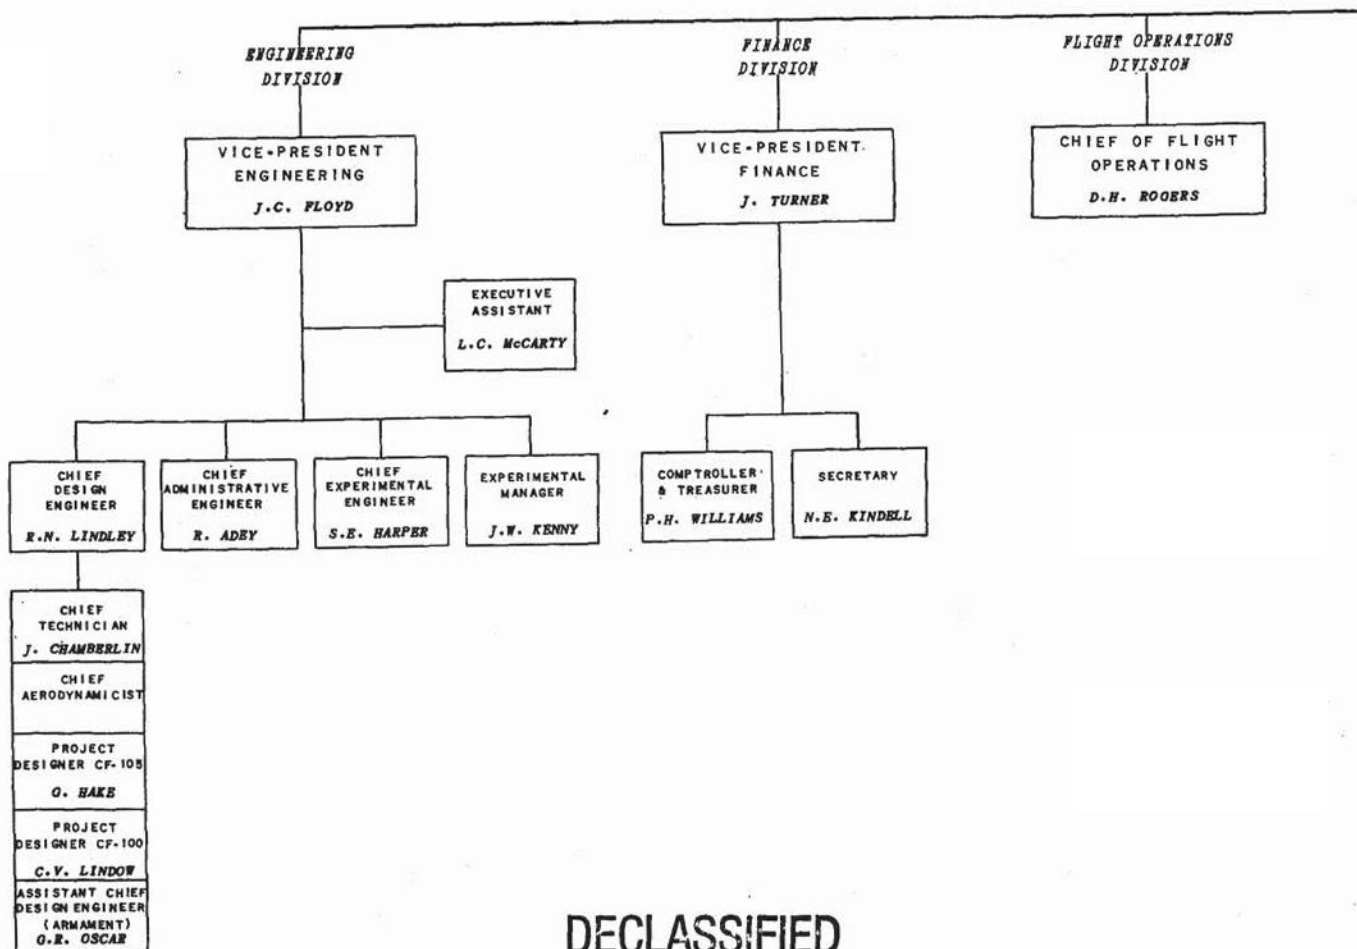

DECLASSIFIED

DECLASSIFIED

COMPANY
ORGANIZATION

(CHART AS ANNEXED TO
POLICY DIRECTIVE No. 101)

PUBLIC
RELATIONS
MANAGER
STEWART

COMMITTEE

H.R. SMITH

J. TURNER

MANUFACTURING
DIVISION

PRESIDENT
MANUFACTURING
R. SMITH

MATERIAL
PROCUREMENT
MANAGER
C.N. LUCAS

PRODUCTION
CONTROL
MANAGER
N. PARSONS

PRODUCTION
SHOPS
MANAGER
W.H. RIGGS

PRODUCTION
FLIGHT TEST
GENERAL
SUPERINTENDENT
D.R. WAGNER

QUALITY CONTROL
& INSPECTION DIVISION

QUALITY CONTROL &
INSPECTION MANAGER
J. FAIRBAIN

SALES & SERVICE
DIVISION

VICE-PRESIDENT
SALES & SERVICE
J.A. MORLEY

SALES & SERVICE
MANAGER
M.D. WILLER

SERVICE
MANAGER
F.C. PLUMB

PARTS
MANAGER
D. MELDRUM

MILITARY
SALES
MANAGER
R.M. HAWLEY

CONTRACTS
ADMINISTRATOR
J.R. DOUGLAS

SPECIAL
PROJECTS
GROUP

CHIEF
DESIGN
ENGINEER
J.C.M. FROST

ENGINEERING
MANAGER
H.C. MOODY

APPROVED.

J. J. J.
PRESIDENT & GENERAL MANAGER

DECLASSIFIED




AVRO AIRCRAFT LIMITED

DECLASSIFIED

SPECIAL PROJECTS
GROUP

SPECIAL PROJECTS
GROUP

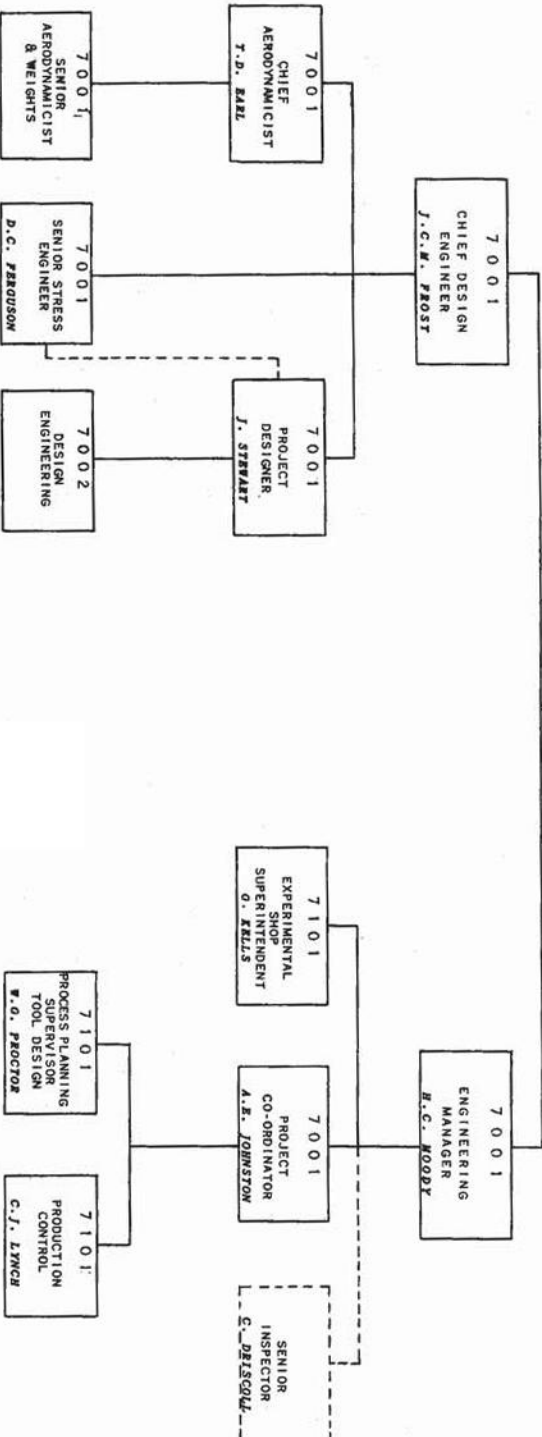

ISSUE 2 OCTOBER 3, 1955

APPROVED

H.C. Moody
ENGINEERING MANAGER
APPROVED

J.C.W. Prost
PRESIDENT & GENERAL MANAGER

DECLASSIFIED